

SLIDE SWITCH

Operation: SMT/贴片卧式 7PIN 小型 滑动开关 [柄长可定制]



LTEM NO.: MS-1290-** (Series)

(L6.70mm × W2.75mm × H1.40mm SLIDE-SWITCH)



表面贴装 SMT

側向操作 LATERAL

精密部品 NICETY

可靠 STABILIZE


適合環保 RoHS

Technical parameter




LEVEL		A[better product]	B[average product]
PROJECT			
Electrical	Contact Rating	0.3A, 30V DC	
Properties	Initial Contact Resistance	50mΩ max.	
Durable Performance	Insulation Resistance	100MΩ min.500V DC	Skey/PD: 100MΩ min.300V DC
	Withstand Voltage	300V AC for 1 minute	250 V AC for 1 minut
Storage temp.	There No Load	15,000 Cycles	10,000 Cycles
	Rated Load	12,000 Cycles	8,500 Cycles
Operating Force	Operating Force	1.6N. (1N.=100gram-force) ±0.5N	
Heat Rrsistance	Heat Rrsistance	IR Reflow:255°C, 5sec. Manual:350°C, 3sec.	

Material declaration		
No.	NAME	Description
A	基座	LCP 30%G/F (Black)耐热塑胶
B	嵌件	C5191R-H 磷铜[镀银]
C	拨柄	PA46 耐热尼龙塑料
D	弹片 1	Beryllium bronze 铍青铜[单面镀银]
E	盖板	C5191R-H 磷铜[镀银]
F	弹片 2	不锈钢 SUS304 t=0.2mm

CIRCUIT DIAGRAM



Unit:mm

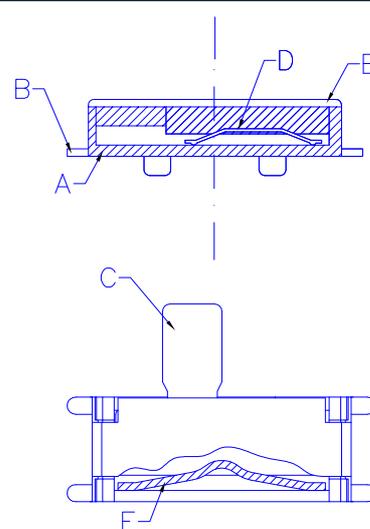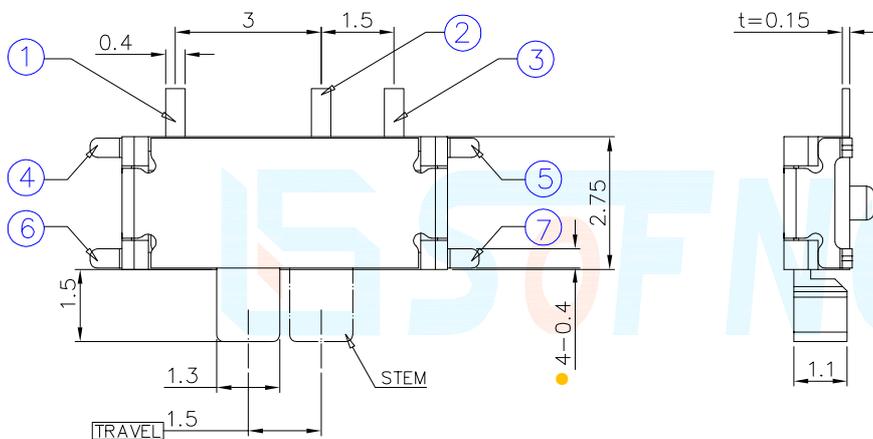

P.C.B LAYOUT

