

Operation: SMT/立式 小型 6PIN 二挡位 滑动开关 [柄长可定制]

RoHS Compliant

LTEM NO.: MS-202-□ (Series)

(L9.10mm×W3.5mm×H3.50mm SLIDE-SWITCH)

表面贴装 SMT

正向操作

精密部品 NICETY

可靠 STABILIZE


適合環保 RoHS






Technical parameter

PROJECT		LEVEL	A[better product]	B[average product]
Electrical Properties	Contact Rating		0.3A, 30V DC	
	Initial Contact Resistance		50mΩ max.	
	Insulation Resistance		100MΩ min.500V DC Skey/PD: 100MΩ min.300V DC	
Durable Performance	Withstand Voltage		300V AC for 1 minute	250 V AC for 1 minut
	There No Load		15,000 Cycles	10,000 Cycles
	Rated Load		12,000 Cycles	8,500 Cycles
	Storage temp.		-25℃~+75℃(Operating Temp:)	
	Operating Force		2.6N. (1N.=100gram-force) ±0.5N	
	Heat Rrsistance		IR Reflow:255℃, 5sec. Manual:350℃, 3sec.	

CIRCUIT DIAGRAM



Unit:mm

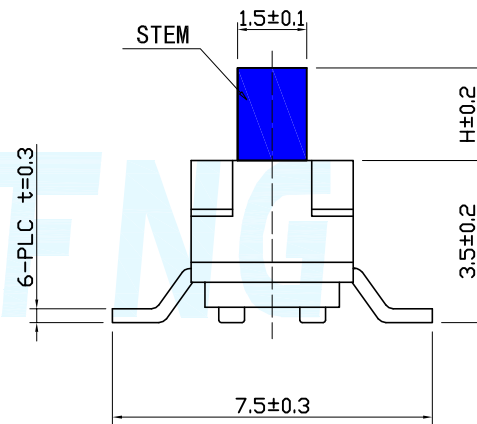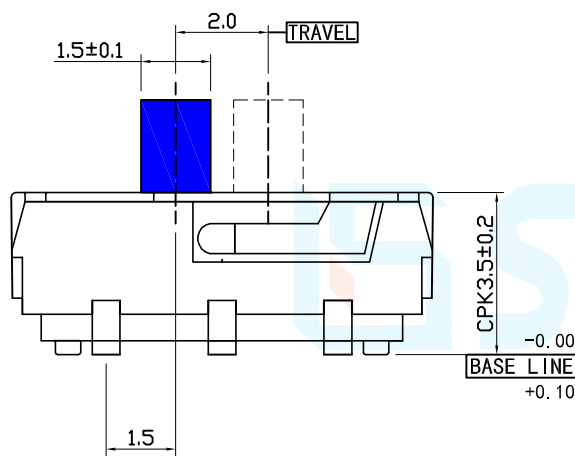

H

2.0

3.0

P.C.B LAYOUT

