


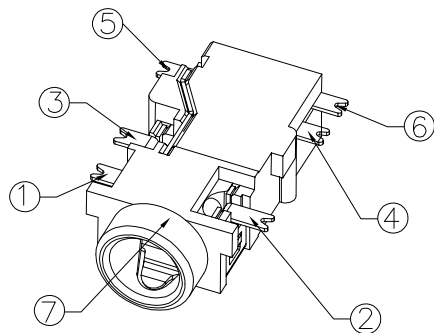
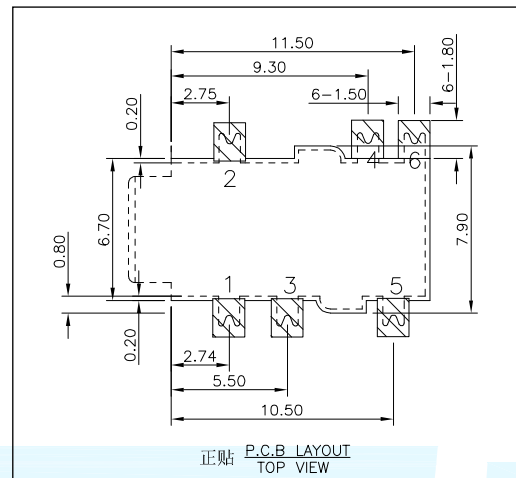
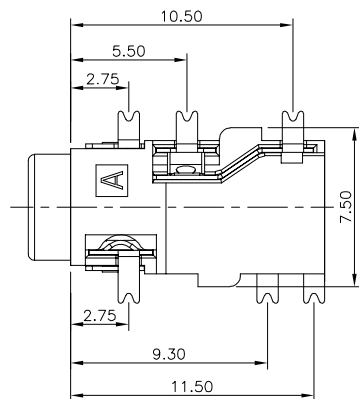
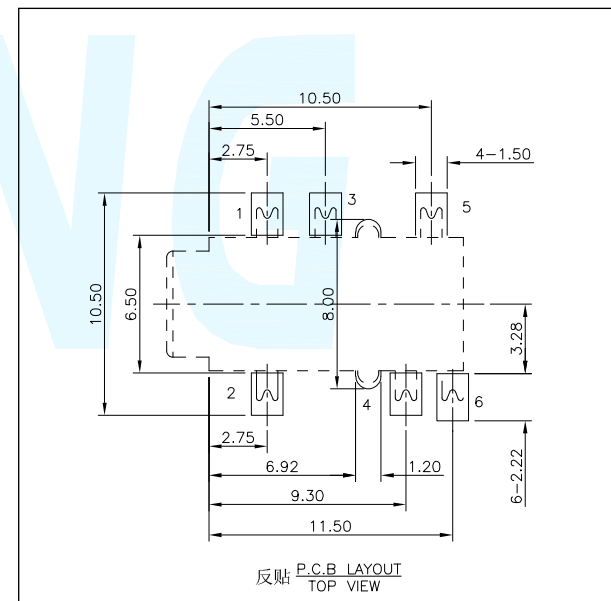
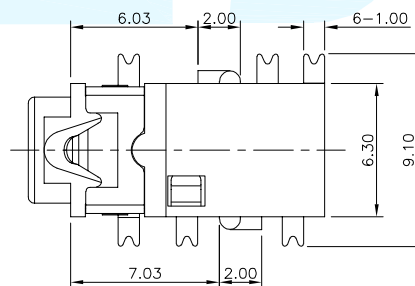


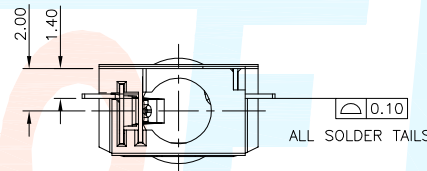

3D VIEW

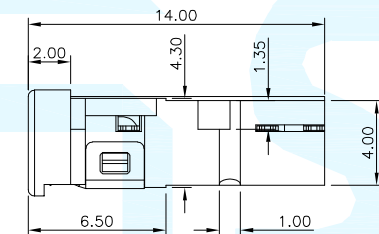


正貼 P.C.B. LAYOUT
TOP VIEW



反貼 P.C.B. LAYOUT
TOP VIEW


REVISION			
LTR	DESCRIPTION	DATE	APP
A0	NEW RELEASE	05/20/2020	PECK

Material declaration			
No.	NAME	Type	Description
①	接觸端子#1	1	C5191R-H (t=0.20mm)磷銅[銀基]
②	接觸端子#2	1	C5191R-H (t=0.20mm)磷銅[銀基]
③	接觸端子#3	1	C5191R-H (t=0.20mm)磷銅[銀基]
④	接觸端子#4	1	C5191R-H (t=0.20mm)磷銅[銀基]
⑤	接觸端子#5	1	C5191R-H (t=0.20mm)磷銅[銀基]
⑥	接觸端子#6	1	C5191R-H (t=0.20mm)磷銅[銀基]
⑦	基座	1	PA9T (Black)耐熱塑膠

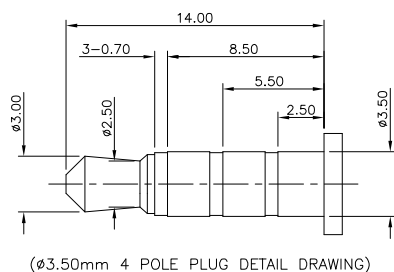

(ø3.50mm 4 POLE PLUG DETAIL DRAWING)

SCHEMATIC



LEVEL		A[better product]	B[average product]
PROJECT	Contact Rating	0.25A, 24V DC	
	Initial Contact Resistance	30mΩ max.	50mΩ max.
	Insulation Resistance	100MΩ min.500V DC	Skey/PD: 100MΩ min.300V DC
	Withstand Voltage	500V AC for 1 minute	350 V AC for 1 minut
Durable	There No Load	6,000 Cycles	5,000 Cycles
	Rated Load	5,000 Cycles	4,000 Cycles
Storage temp.		-25℃~+75℃(Operating Temp:)	

DIMENSION CLASSIFICATION	
■	CRITICAL
☒	MAJOR

TOLERANCE TABLE

.X	±	0.40
.XX	±	0.25
.XXX	±	0.10
ANGLE	±	2°

台灣碩方精密電子科技有限公司
TAIWAN SOFNG PRECISION ELECTRONIC CO., LTD

TITLE PJ-342E 四段式耳机插座
SMT沉板带开关常闭功能

PART NO.	PJ-342E	SERIES	SD106
APPROVED	Peck	DWG NO.	SOF-G006
CHECKED	Paul	SCALE	1:1
DRAWIN	David	UNIT	mm
REV	AO	SIZE	A4
SHEET NO.	1/1		