

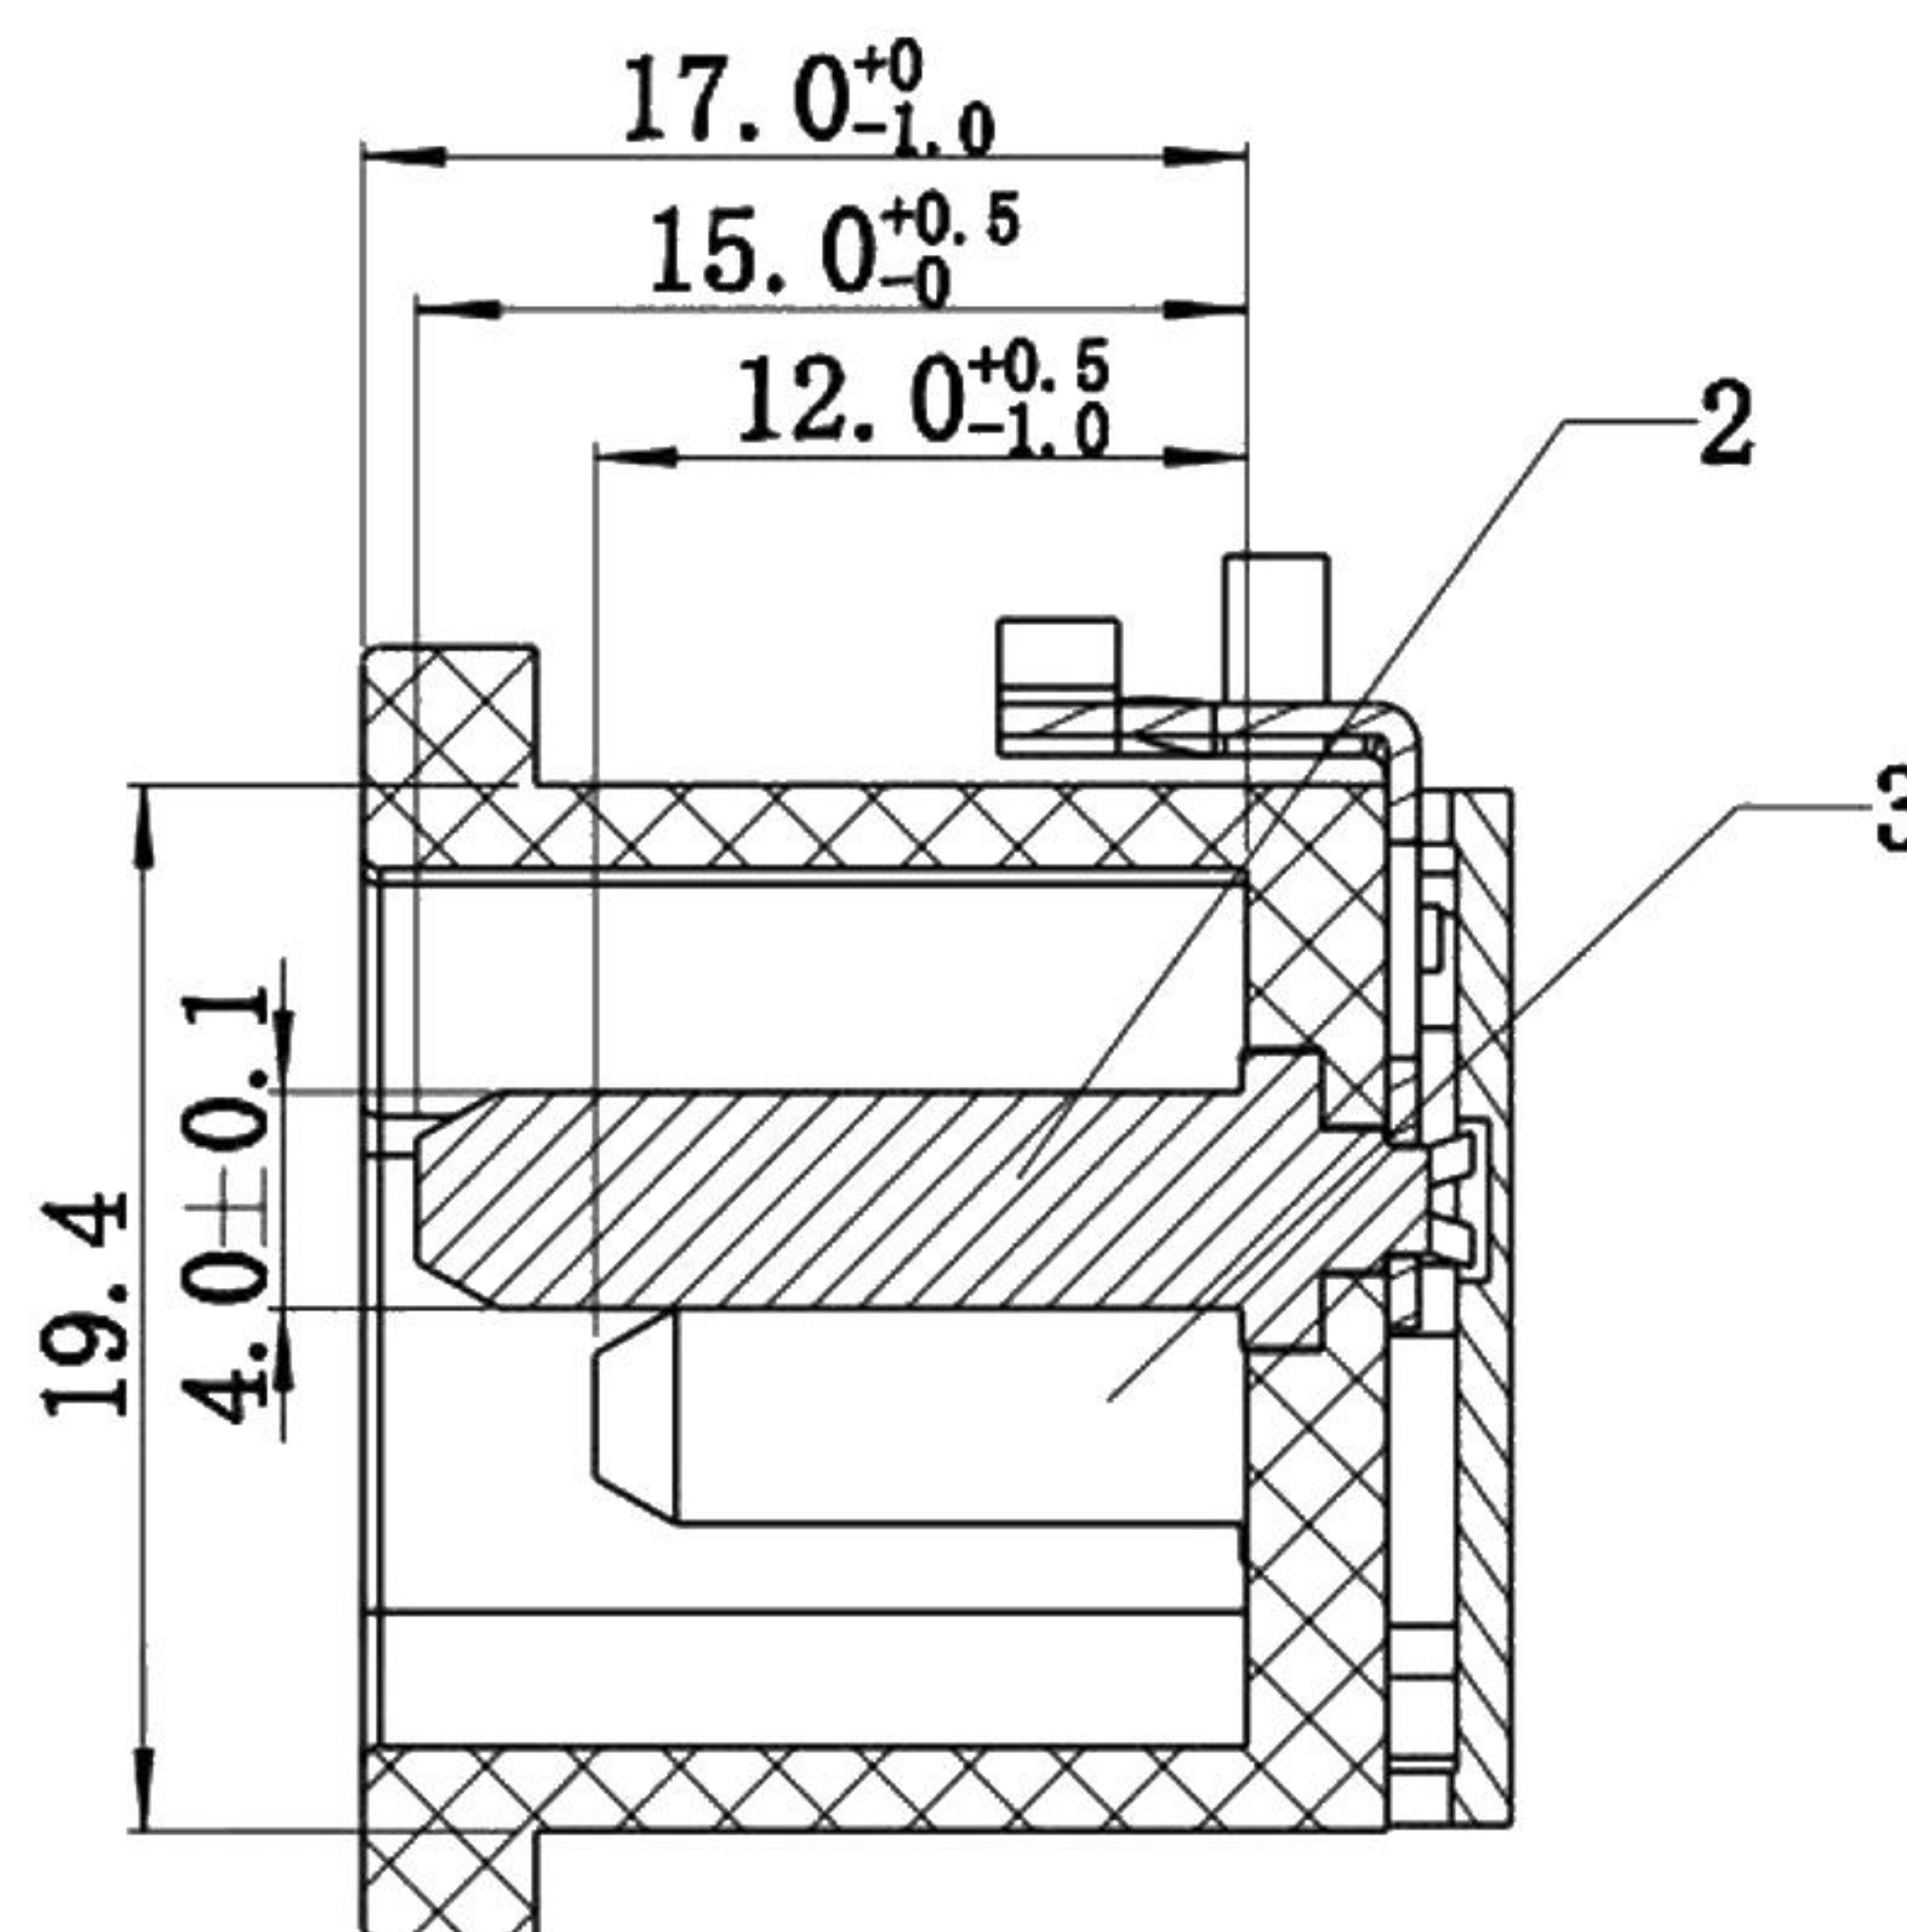


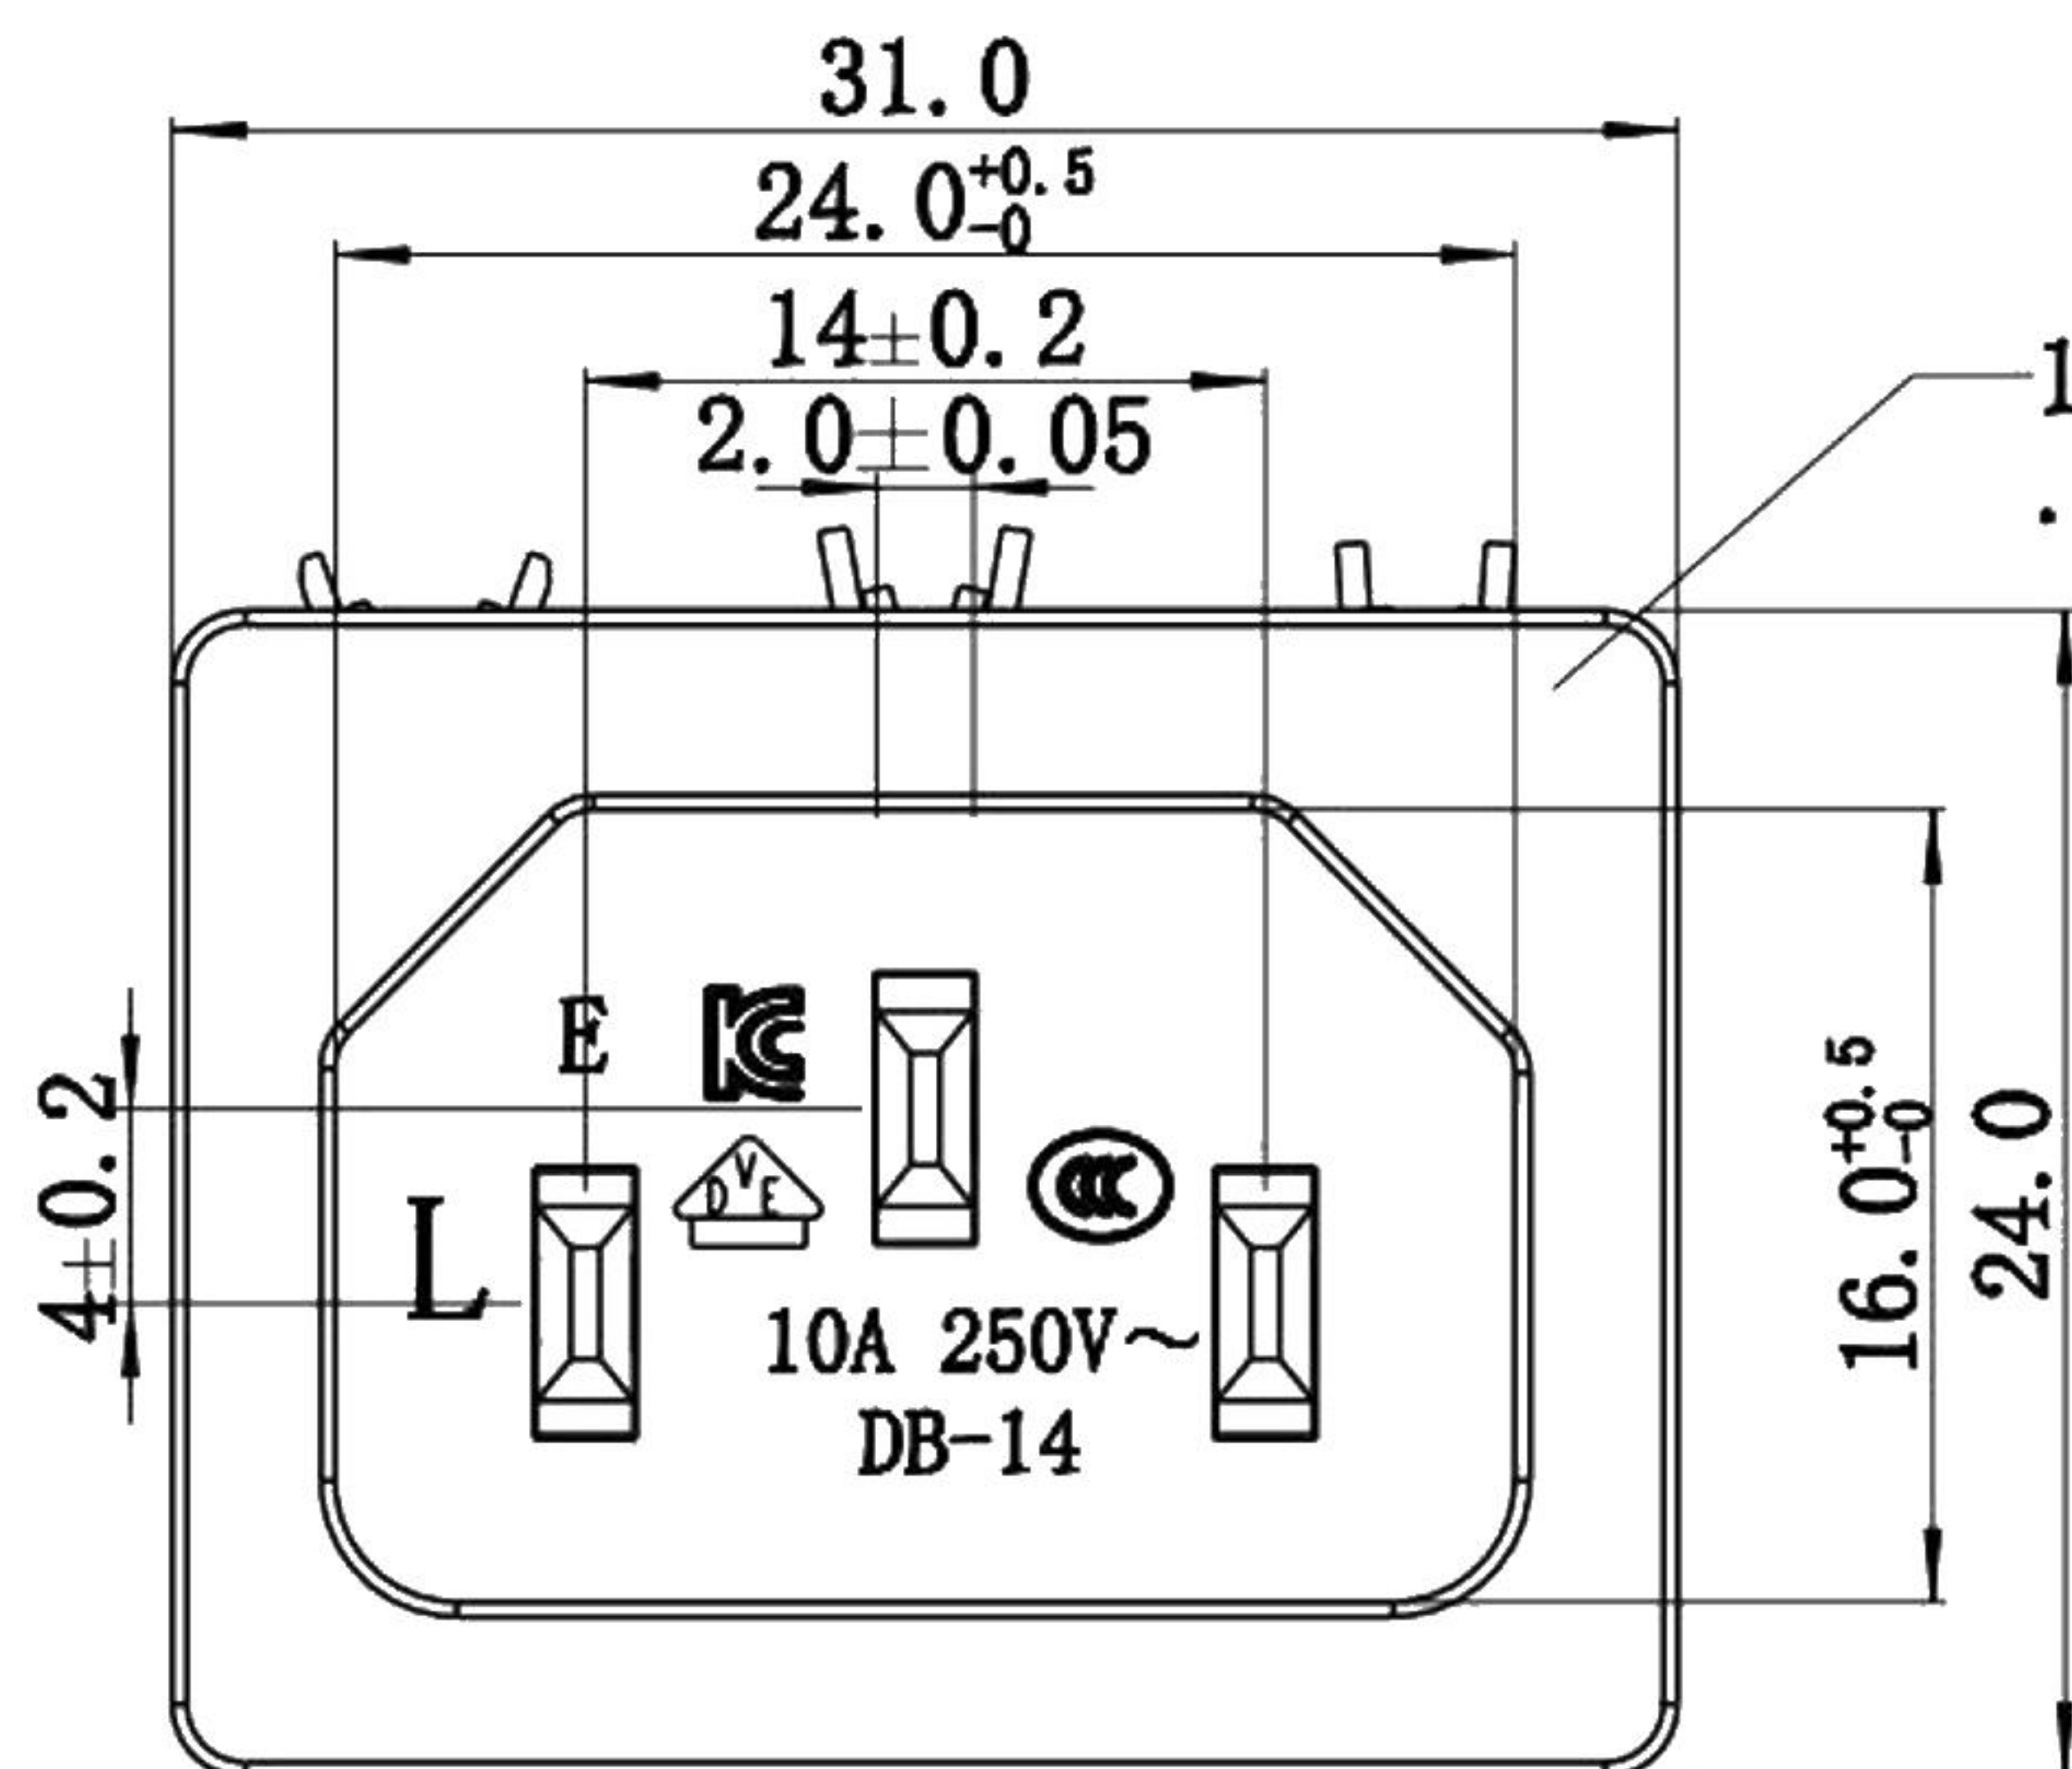

剖面 A-A

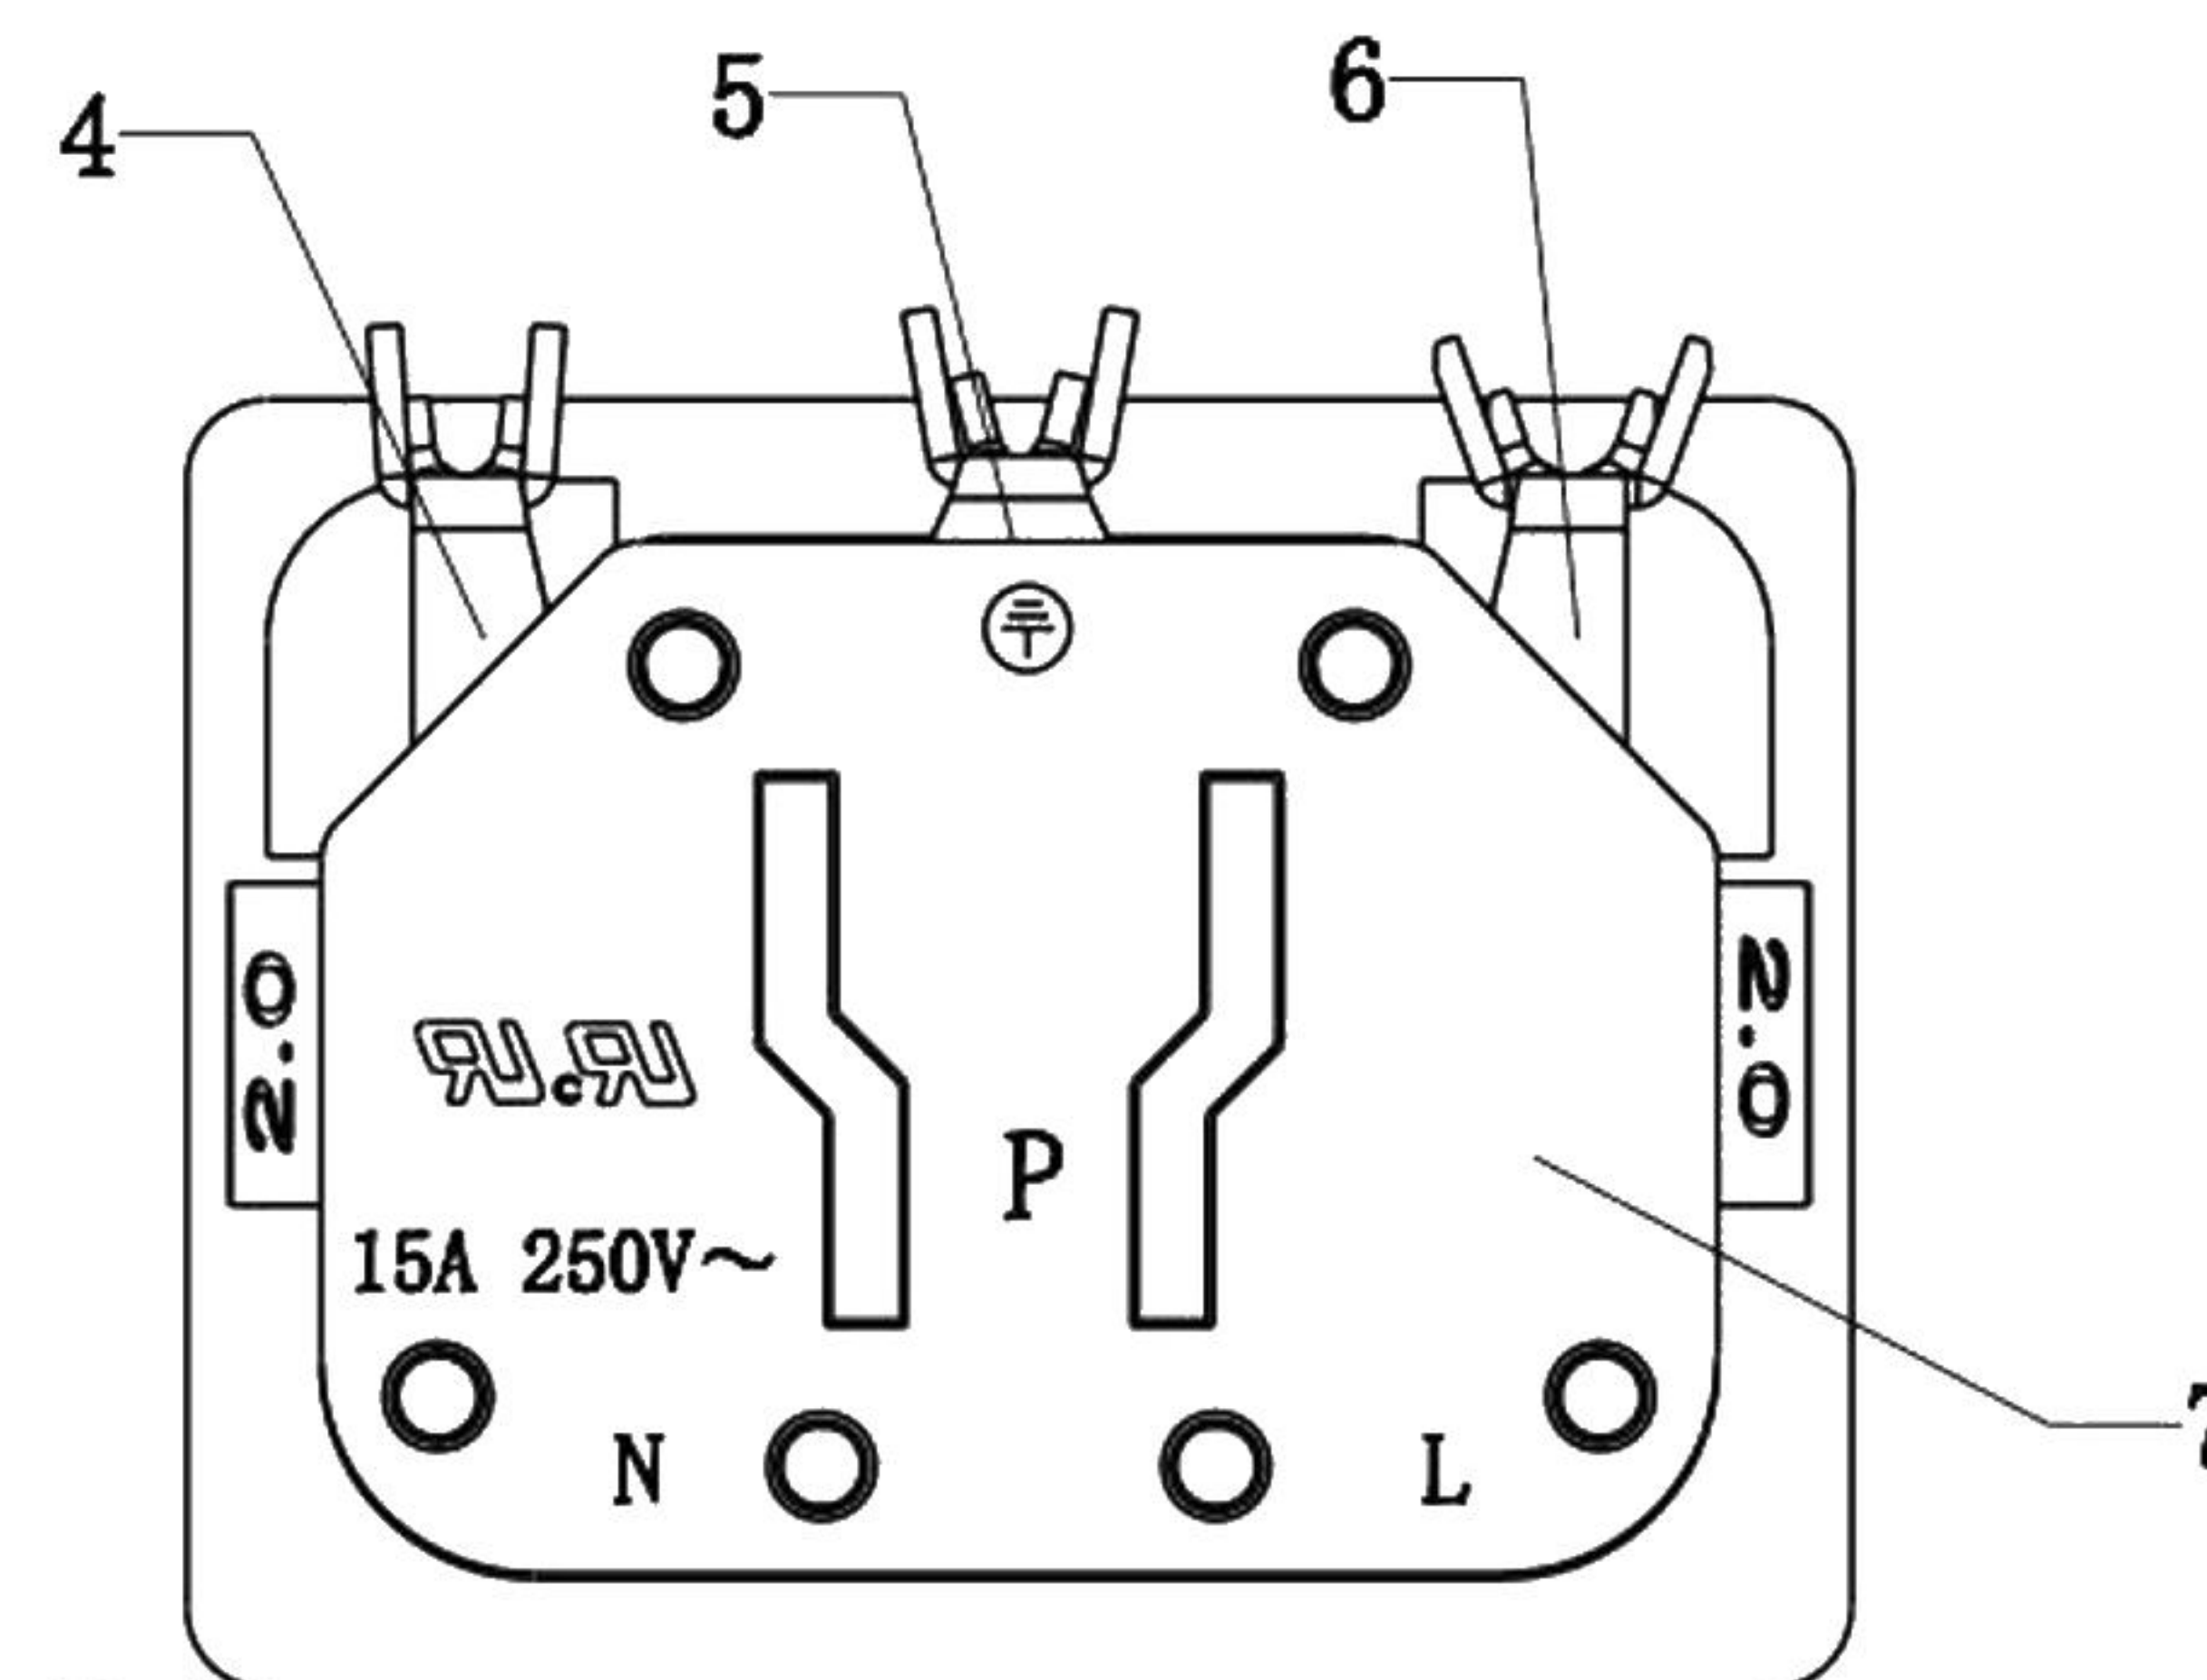

Rating:

15A 250V AC UL cUL

10A 250V AC VDE 3C KC

Insert And Extract Force: 20N~50N

Terminal Strength: >60N

Operating Life: >6000 cycles



Withstand Voltage: Between all terminals:2500VAC(50-60Hz)1min

Terminals to Base:3750V AC(50-60Hz)1min

Leakage Current:1mA

Insulation Resistance:>100MΩ 500V DC

Body Materil: PBT 94V0

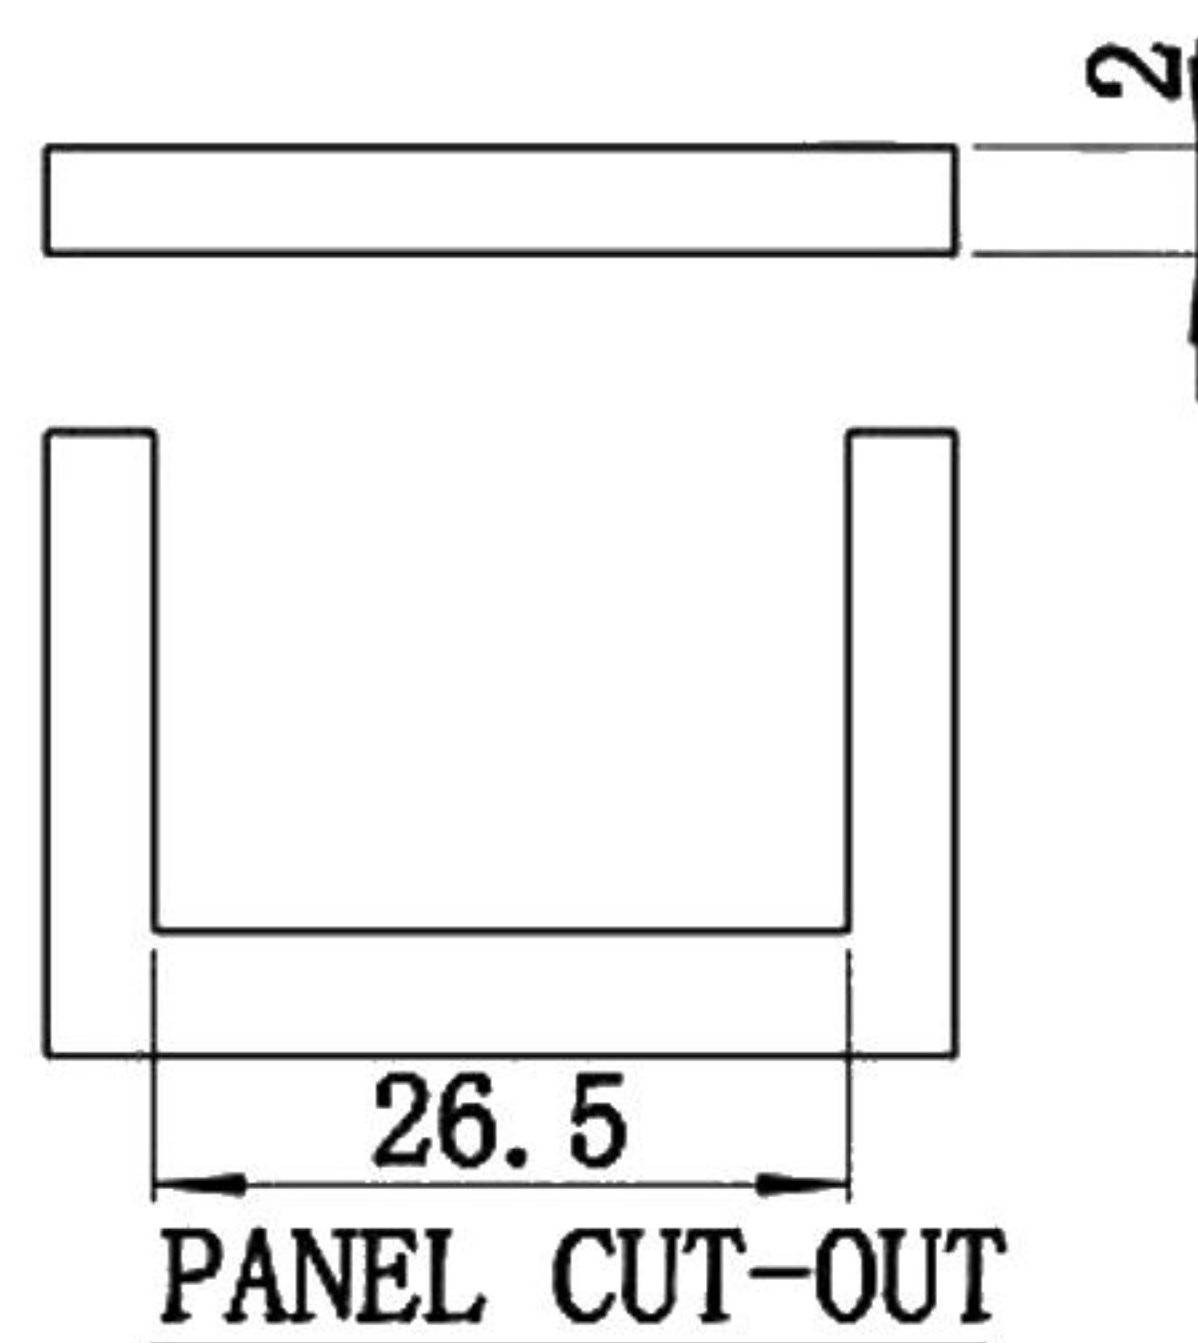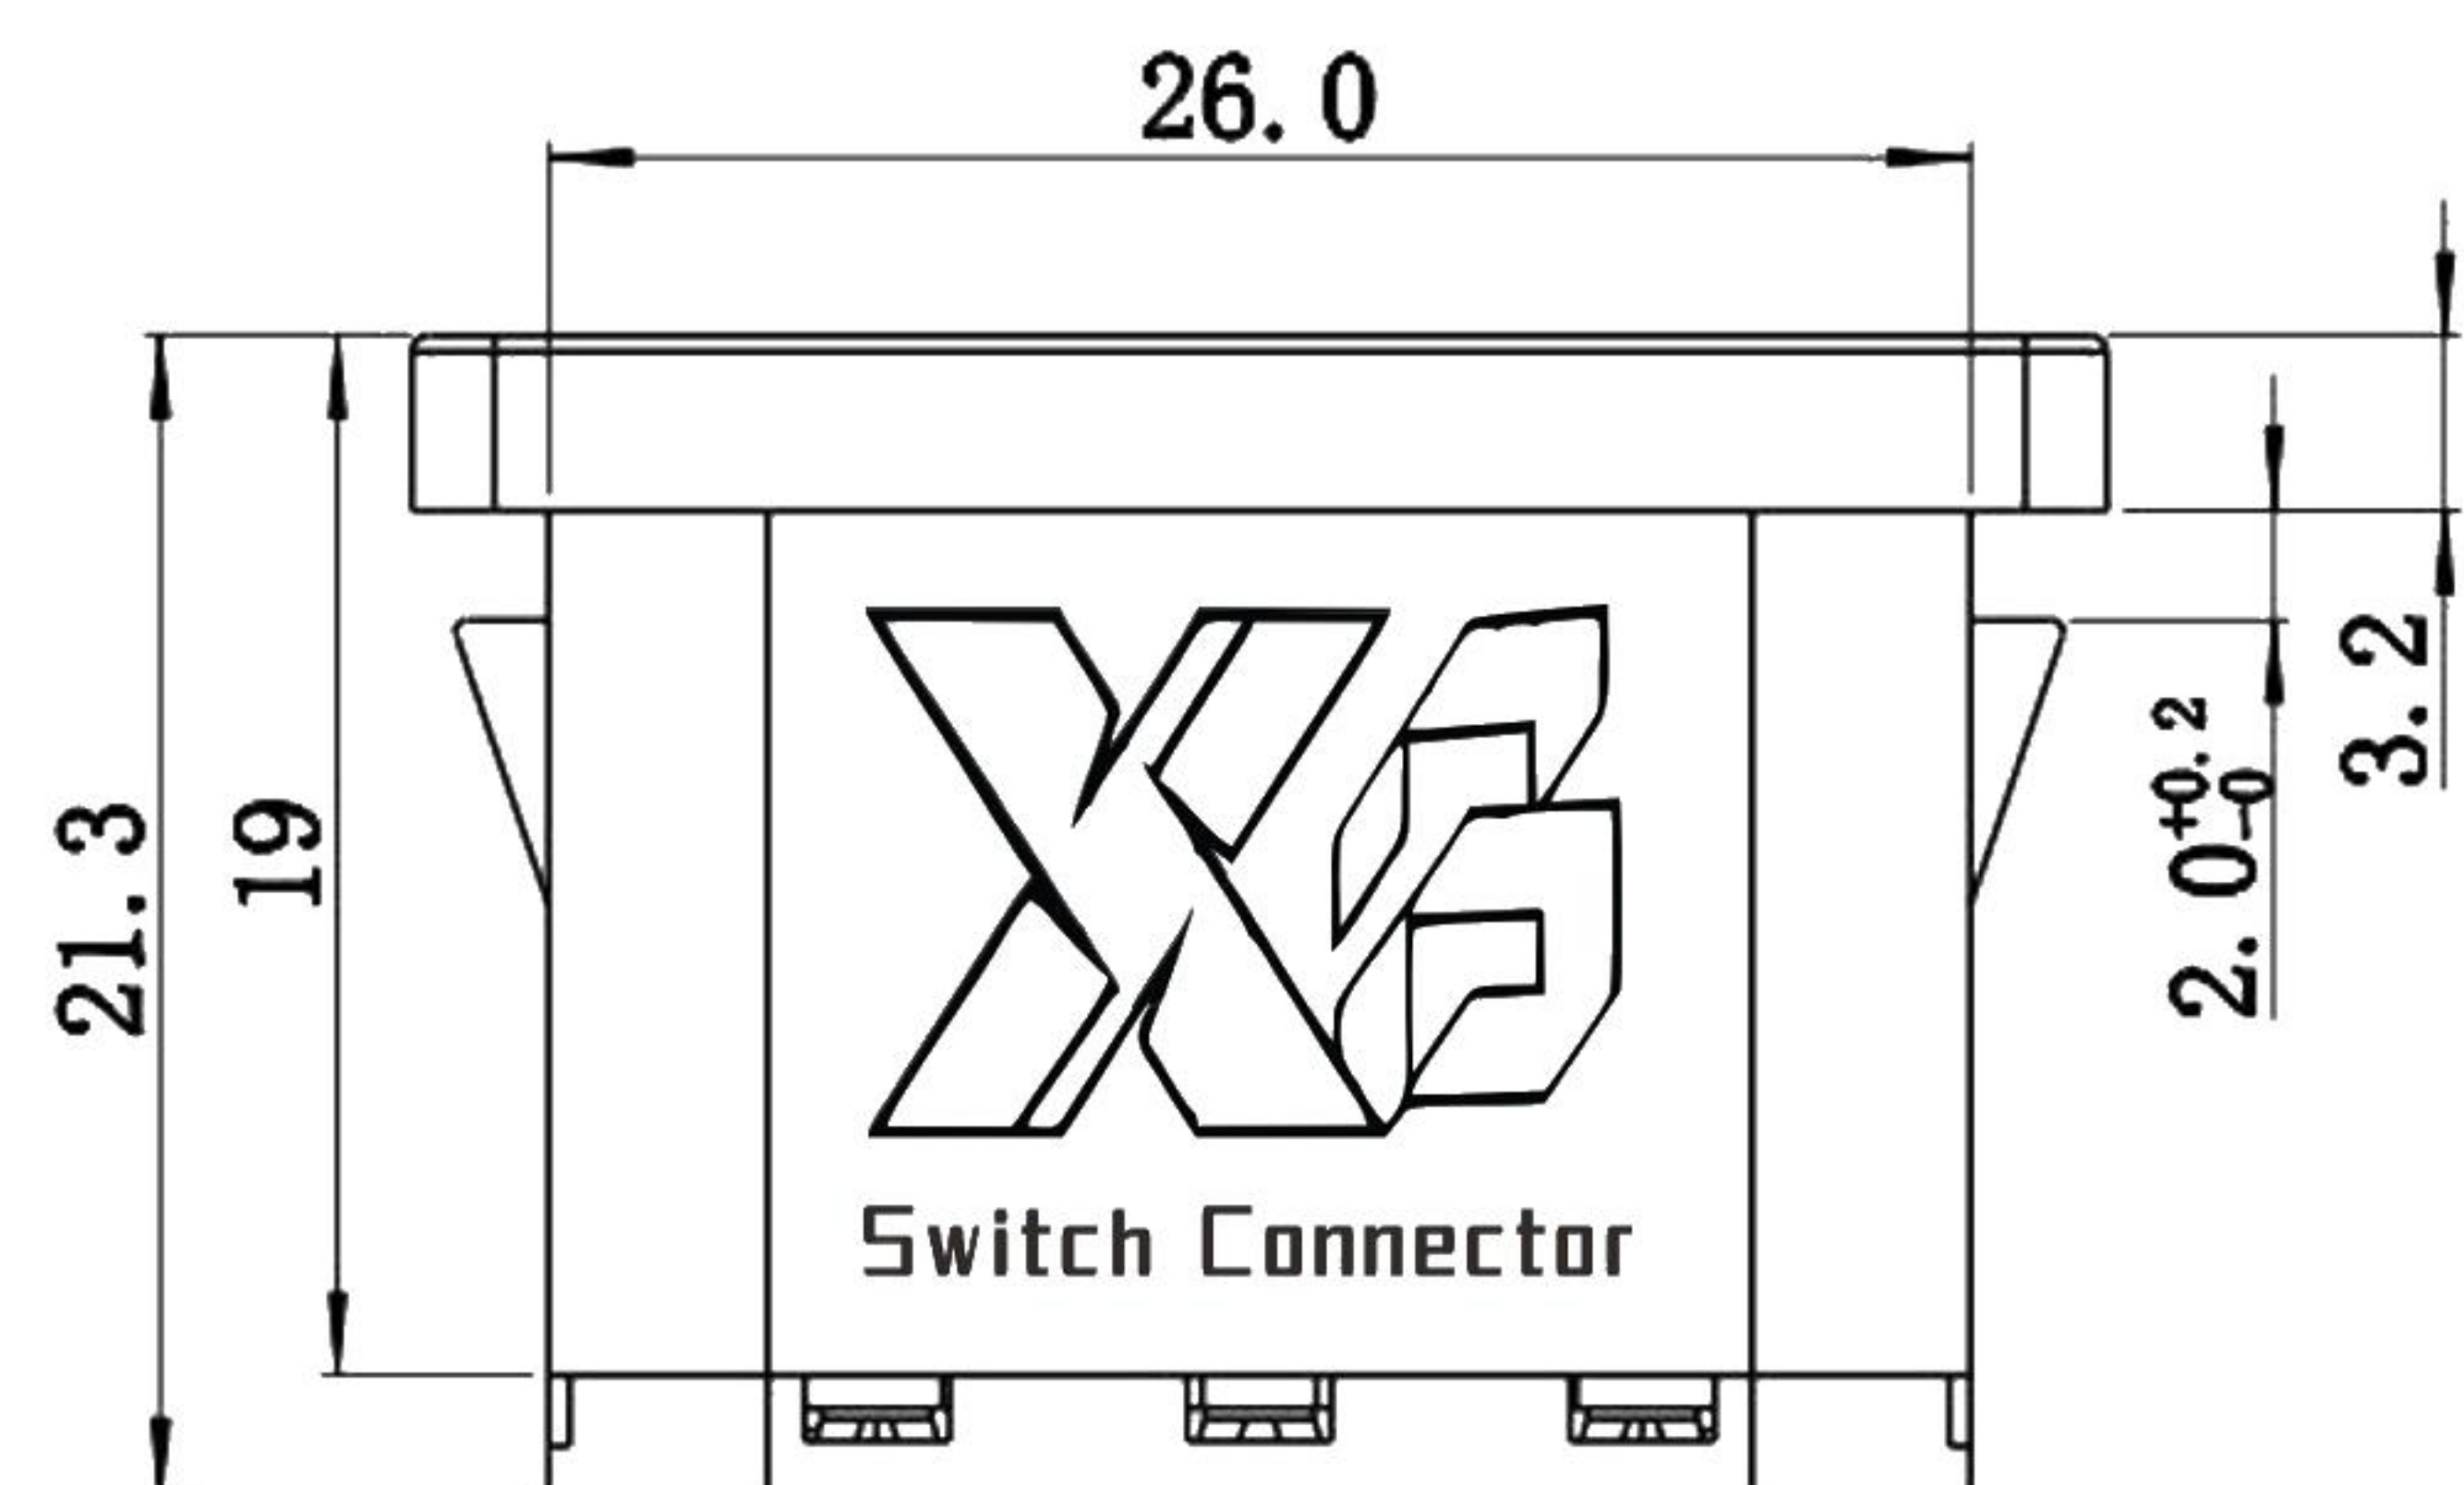

序号	名称	材料	处理	数量	备注
1	DB-14-3PE塑料件	PBT	黑色	1	
2	DB-14-PA(A)长插销	黄铜	镀镍	1	
3	DB-14-P1(1)短插销	黄铜	镀镍	2	
4	DB-14-HBR	黄铜	镀锡	1	
5	DB-14-E3	黄铜	镀锡	1	
6	DB-14-HBL	黄铜	镀锡	1	
7	DB-14-3PE盖板	PA66	黑色	1	

55*43*23.5cm箱, 50只*40吸盒装=2k件, 净重:22 毛重:24=KG,

				普通公差:		Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.							
				COMMON TOLERANCE :									
				UP TO 5	±0.20	单位 UNIT	mm	投影 PROJECTED		品名 PRODUCT NAME	AC Inlet C14	比例 SCALE	Free
				ABOVE 5 TO 30	±0.30	绘图 DRAWN BY	金泽杰	核 对 CHECKED BY	张嘉龙	型 号 MODEL NO.	/DB-14		
				ABOVE 30	±0.50	日期 DATE	2022/7/17	核 准 APPROVAL BY	周培雷	料 号 PART NO.	DB-14-3PE-E3HB(2.0)(G)-ZP		
REV.	DATE	REVISION DESCRIPTION		ISSUE	ANGULAR	±5°							