
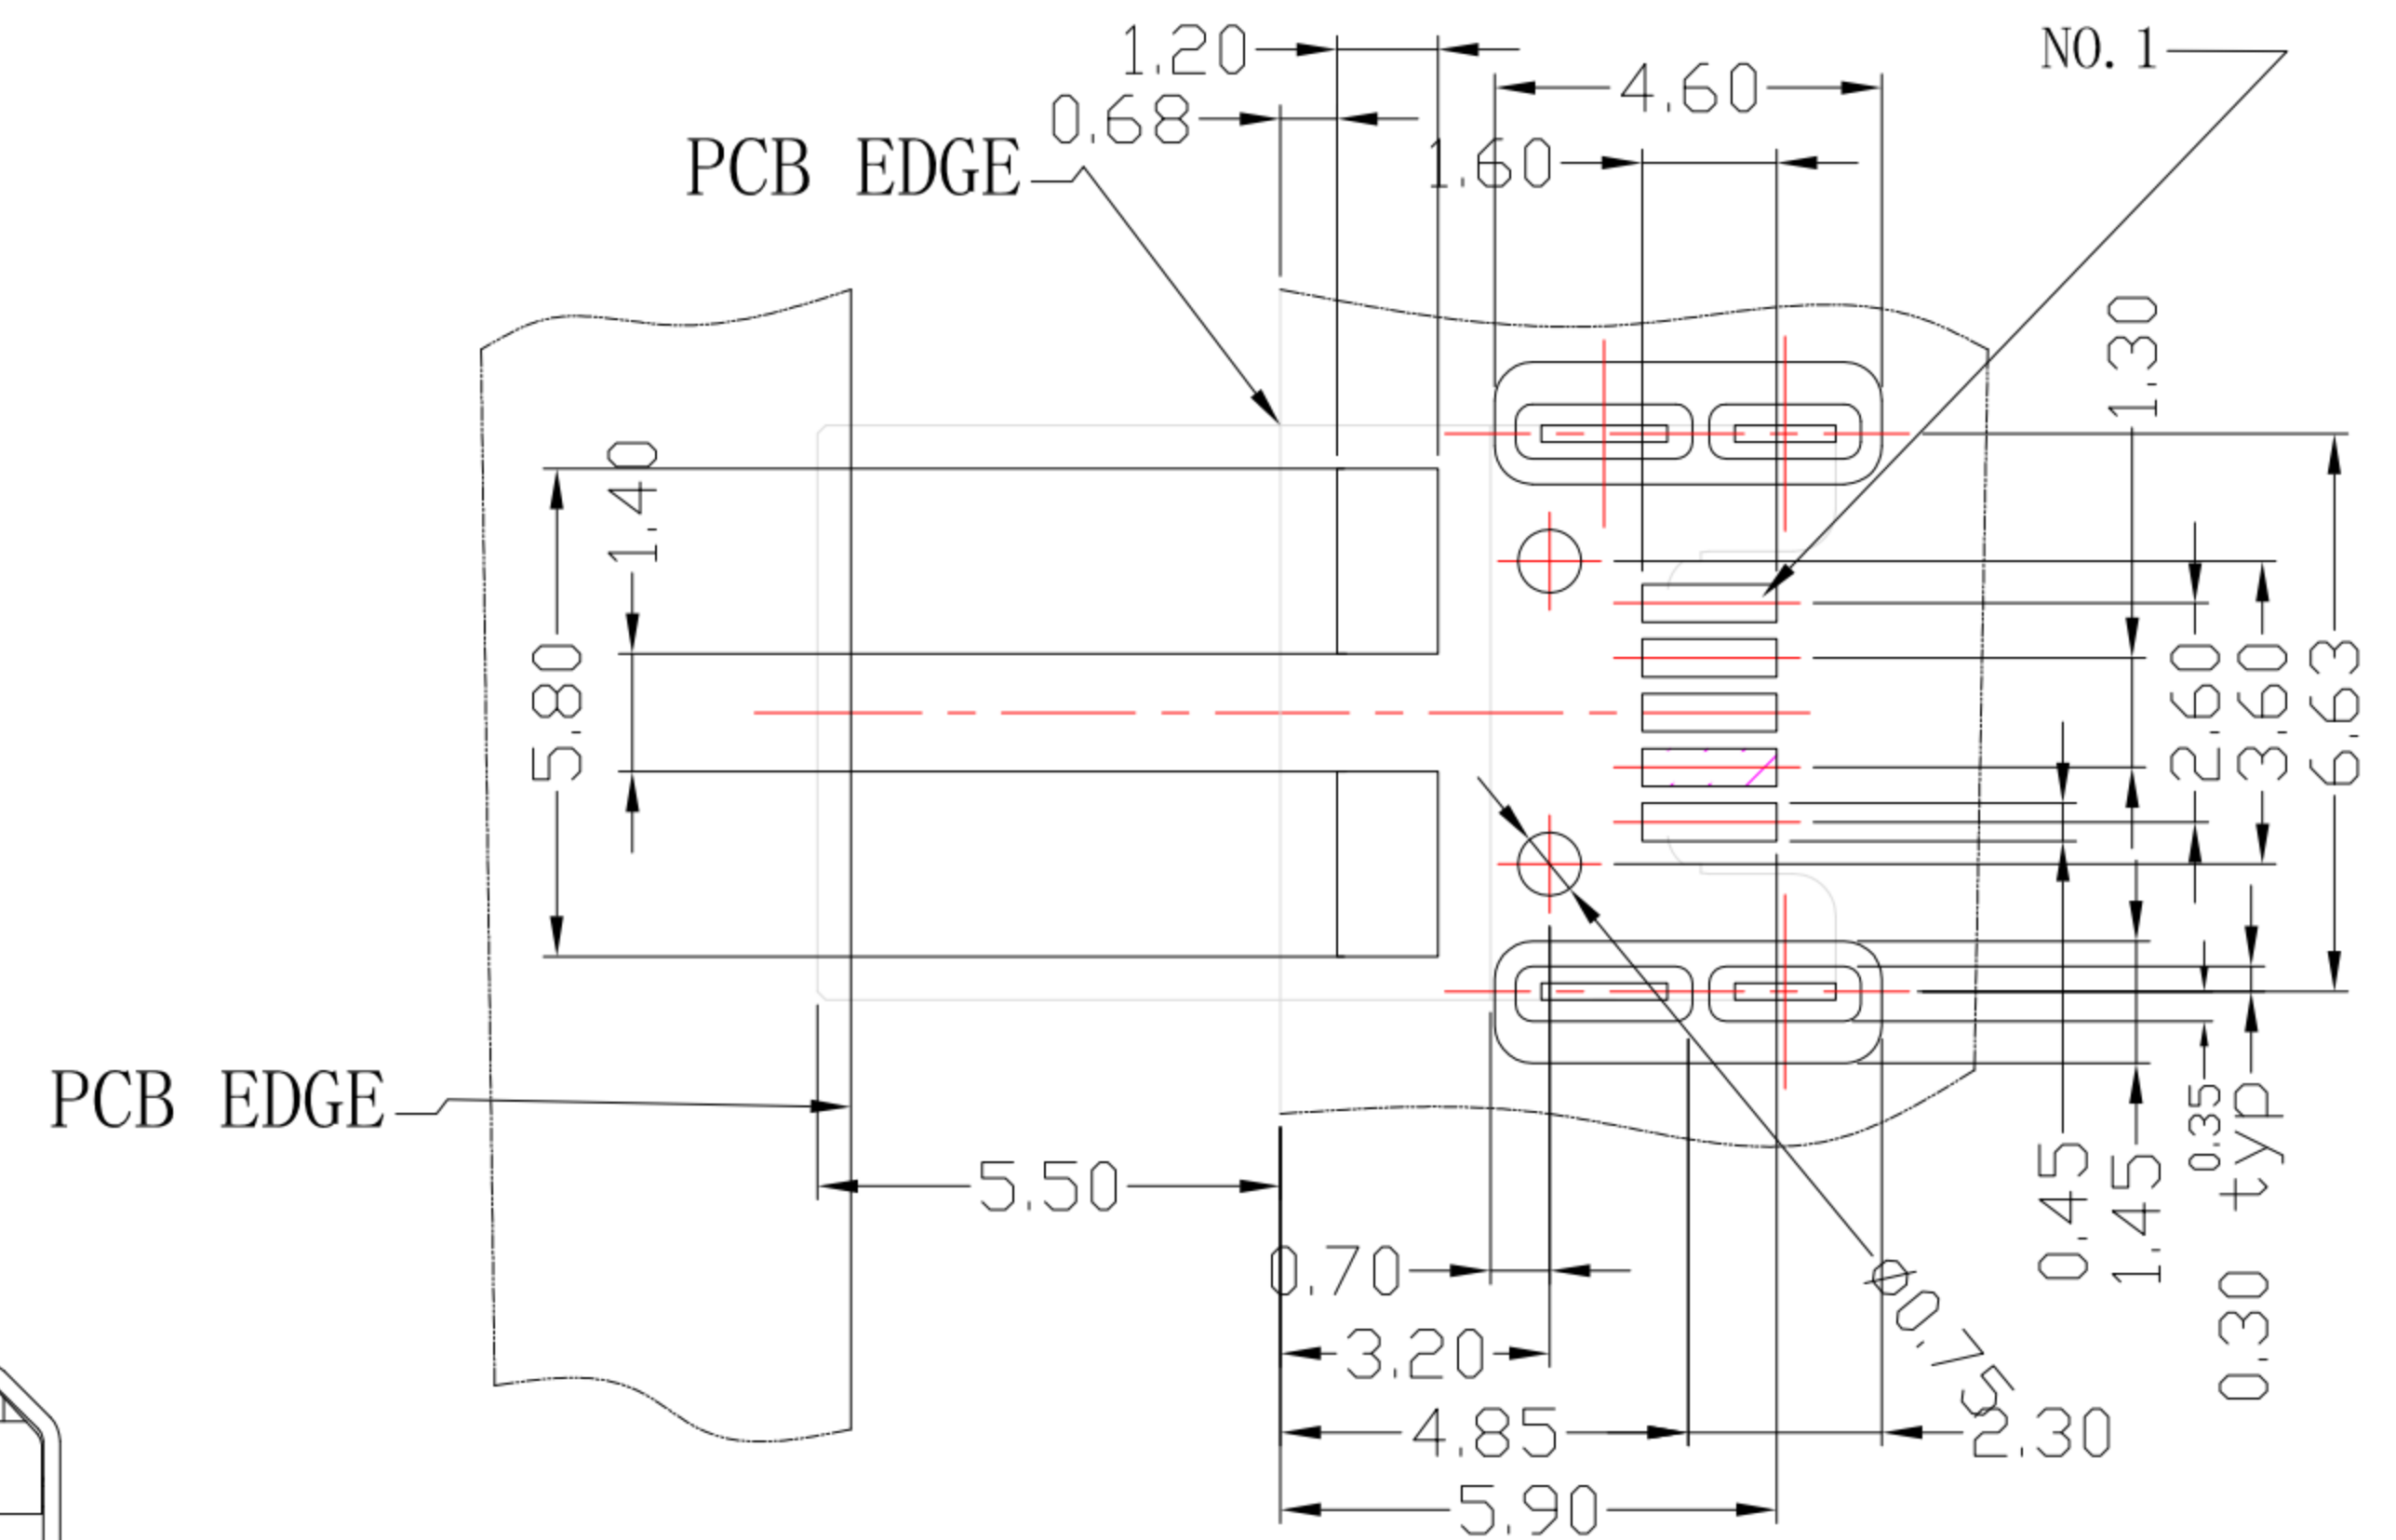


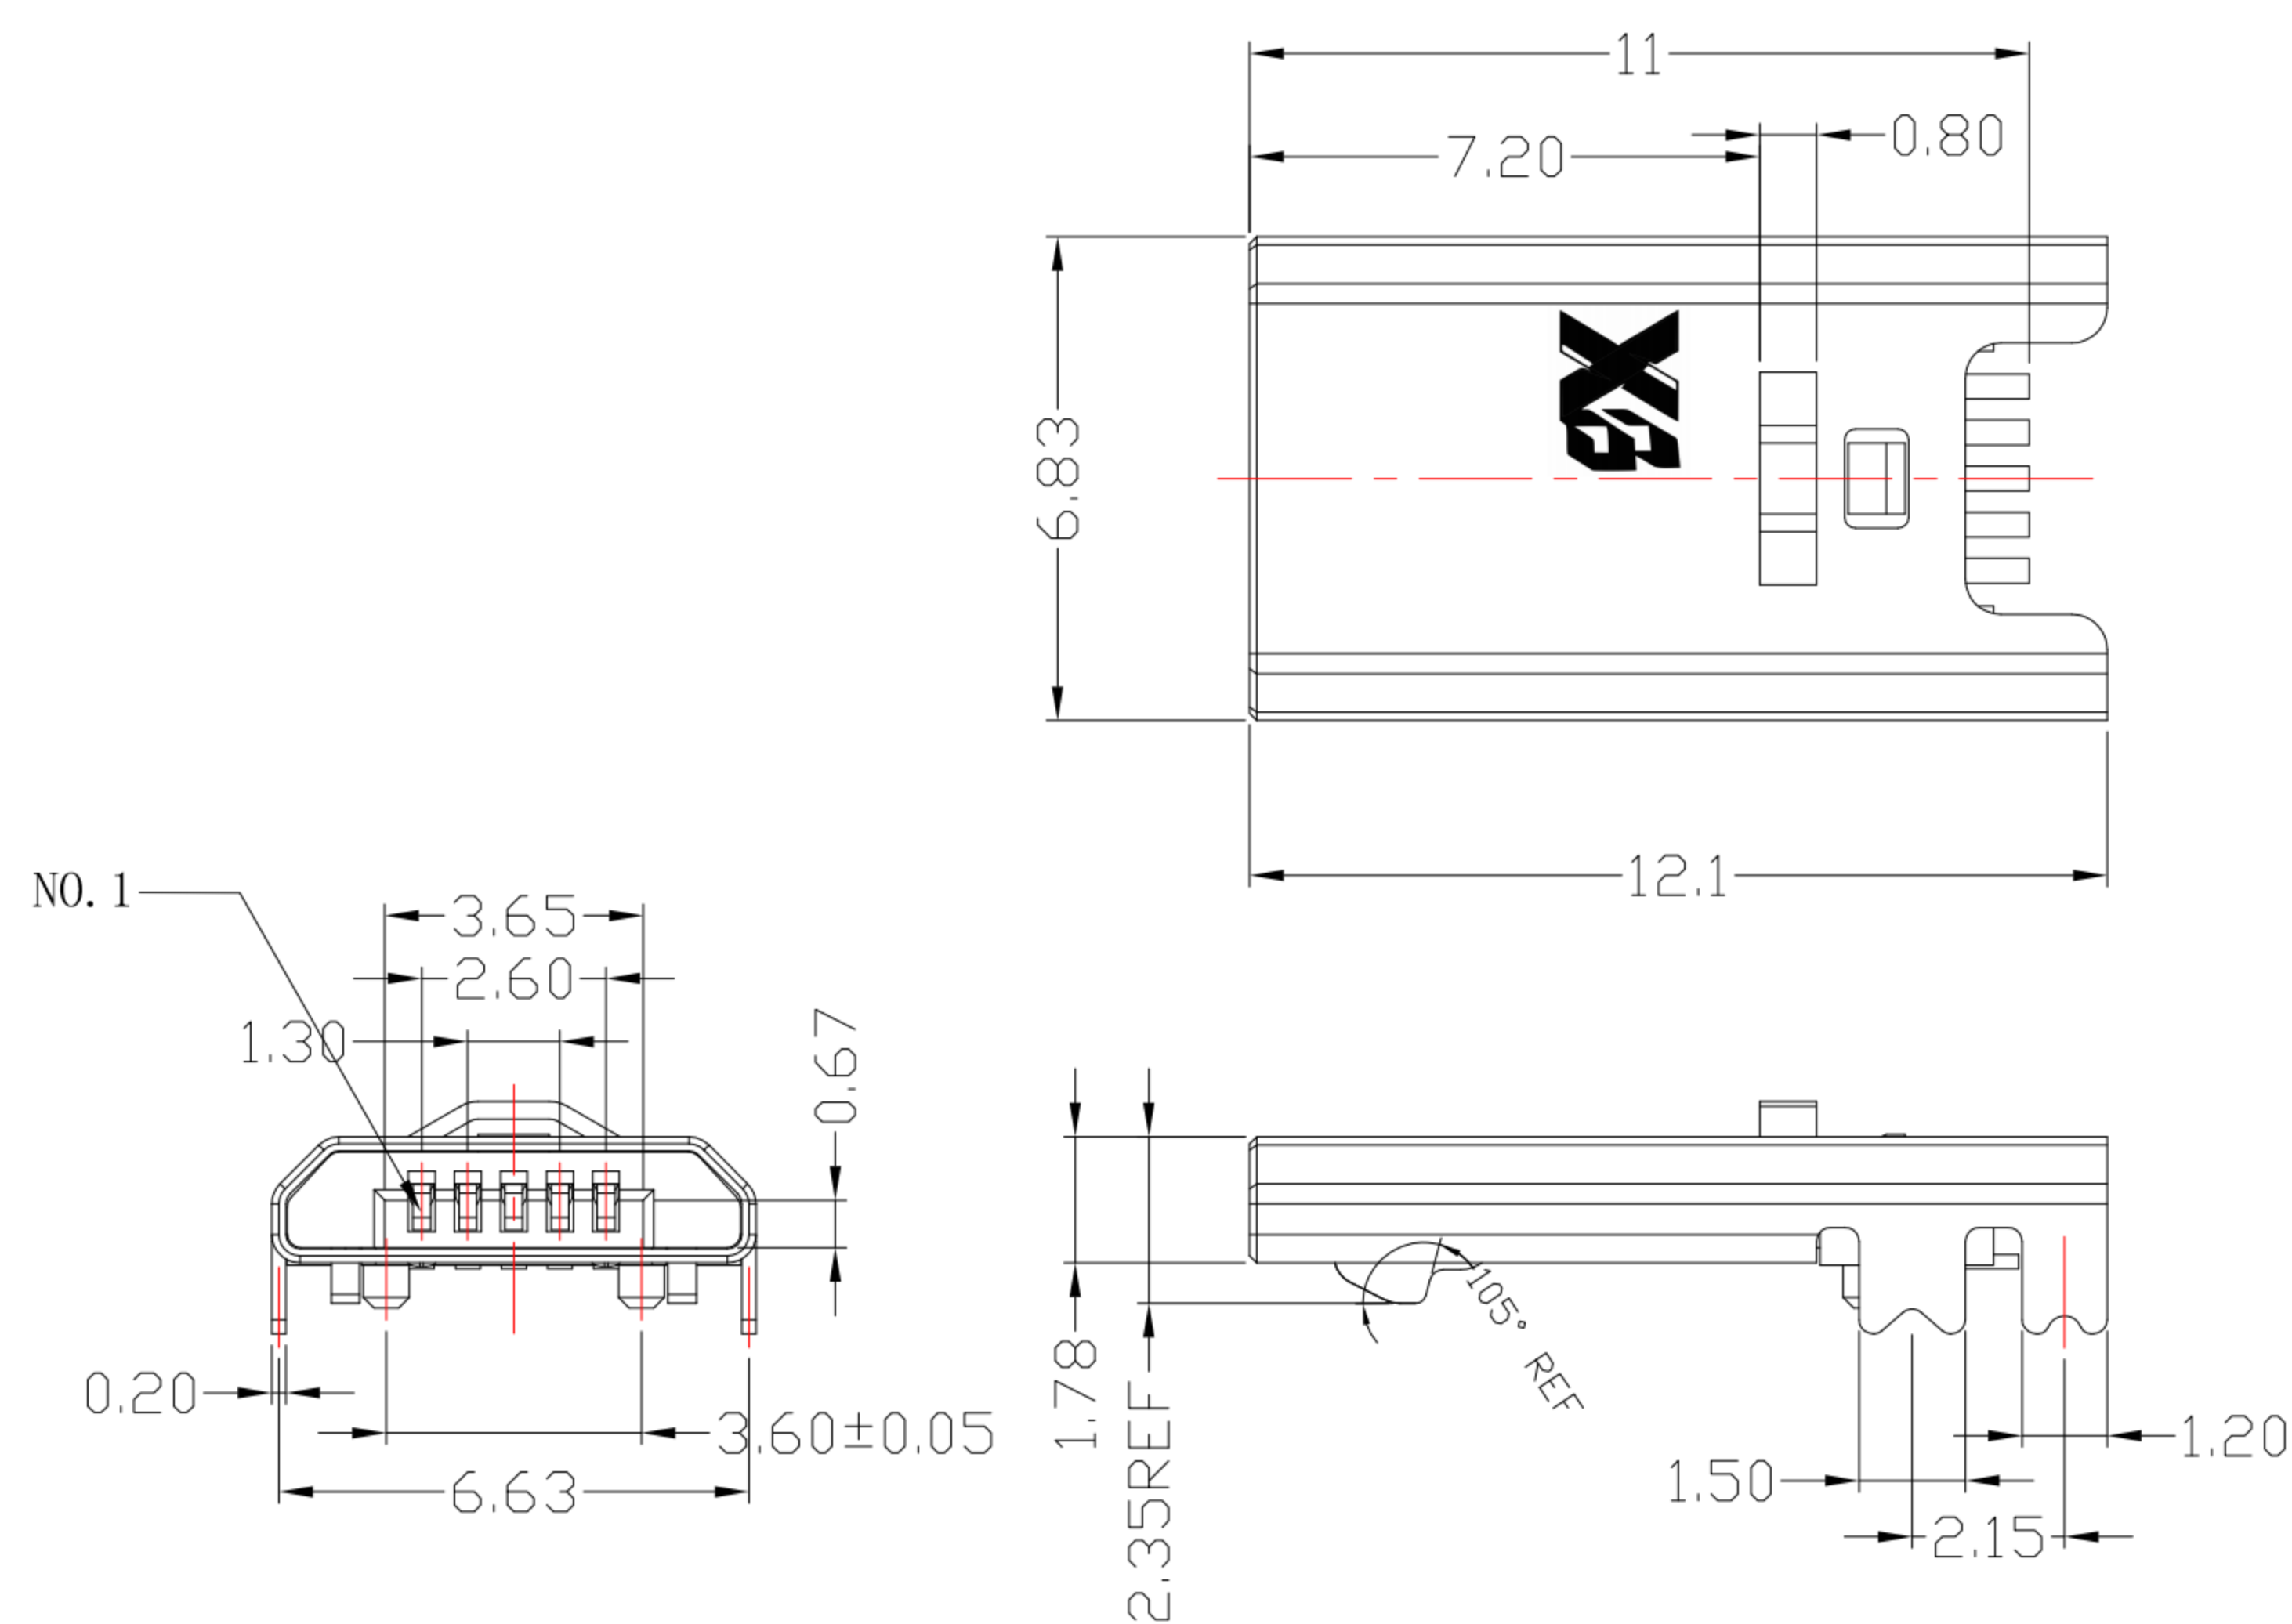

SPECIFICATION:

1. RATING: 1.0 A , 30VAC
2. DIELECTRIC WITHSSTANDING VOLTAGE: 100 VAC FOR 1min
3. CONTACT RESISTANCE: 30 mΩ MAX.
4. INSULATION RESISTANCE: 100 MΩ MIN.
5. LIFE: 5,000 CYCLES
6. TEMPERATURE RANGE: -30°C ~ +80°C