

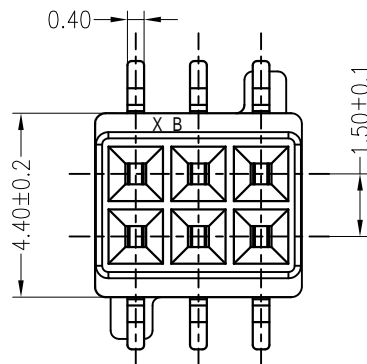
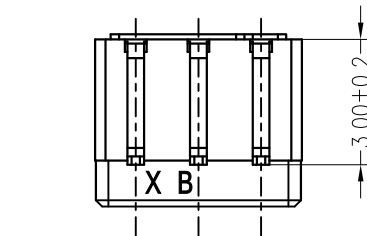


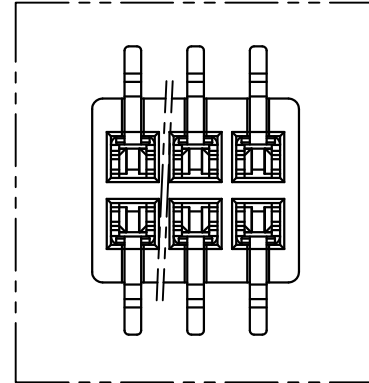
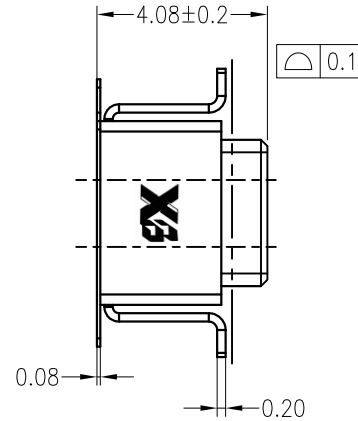


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0	—	Release	—	2018.06.11
A1		增大麦拉解决抛料问题	蒋建银	2020.05.30

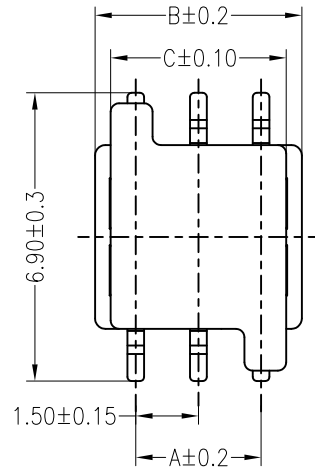

PCB LAYOUT

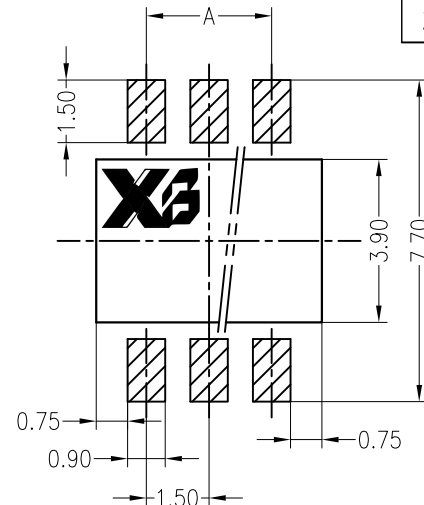

PIN.	DIM A	DIM B	DIM C
2*2	1.50	3.50	3.50
2*3	3.00	5.00	A1 4.20
2*4	4.50	6.50	
2*5	6.00	8.00	
2*6	7.50	9.50	
2*7	9.00	11.00	
2*8	10.50	12.50	

主要技术参数 Main Specifications

线 数 (Poles): 04 to 16

接触电阻 (Contact resistance): $\leq 30\text{m}\Omega$

绝缘电阻 (Insulation resistance): $\geq 500\text{M}\Omega$

额定电压 (Rated voltage): 250V AC DC

额定电流 (Rated current): 1.0A AC DC

耐 电 压 (Withstand Voltage): 500V AC/minute

温度范围 (Temperature Range): $-40^{\circ}\text{C} \sim +110^{\circ}\text{C}$

ORDER INFORMATION:

XB-L1501AFV-2**-F6MB1-R-2			
PART No.		2:NO.2	PACKAGING:
No.OF CIRCUITS:		R=REEL	
PLASTIC MATERIAL:		Metal code:	
F6M=LCP(BEIGE)		1=PhosphorBronze	
		PLATING:	
		B=MATTE Sn	

C	MYLAR	1 PCS		
B	CONTACT	n PCS	PhosphorBronze	MATTE Sn-plated
A	HOUSING	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD				
X.±0.5	X.±5°	USE:	CUSTOMER	
.X±0.3	.X±2°	APPD:		
.XX±0.25	.XX±1°	CHKD:	王 锋	
--	--	DR:	方松乐	
⊕	⚡	UNITS: mm	DR:	蒋建银
TITLE: —			PART NO.: L1501AFV-2**-F6MB1-R-2	
DWG NO.:			SCALE 1 : 1	
SHEET 1 / 1				