
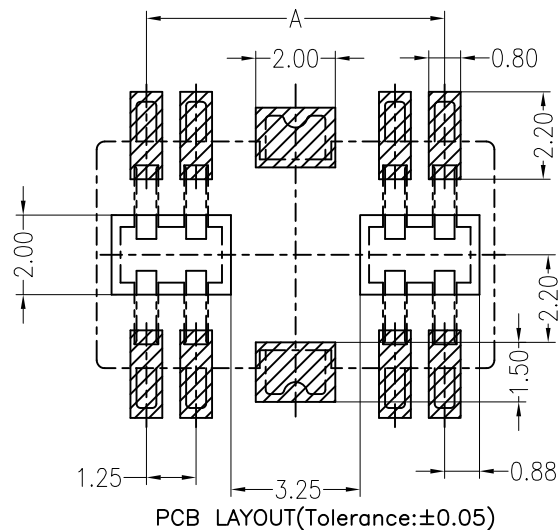
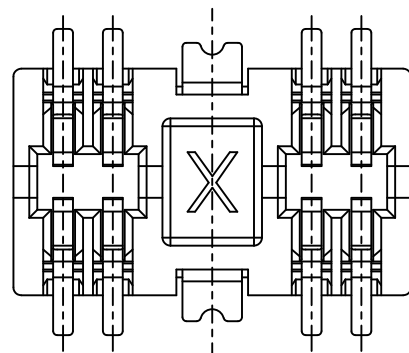
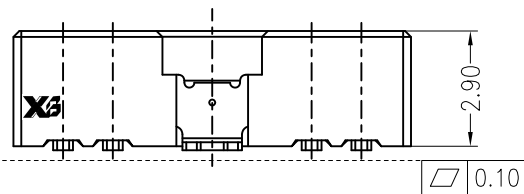
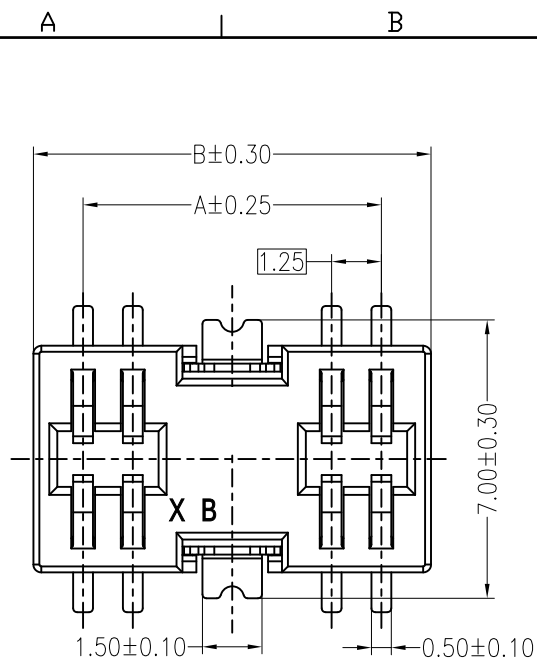


ORDER INFORMATION:


XB- L1251AWV-2**-F8MB1-R			
PART No.		PACKAGING:	R=REEL
No.OF CIRCUITS:		Metal code:	1=PhosphorBronze
08-12		PLATING:	B=MATTE Sn
PLASTIC MATERIAL:			
F8M=LCP(BEIGE)			



REV	DESCRIPTION	DESIGN	DATE
A0	NEW RELEASE	FangSongLe	2020/04/06

Specifications:

Contact resistance: $\leq 20\text{m}\Omega$
 Insulation resistance: $\geq 1000\text{M}\Omega$
 Rated voltage: 125V AC DC
 Rated current: 1.0A AC DC
 Withstand Voltage: 1000V AC/minute
 Temperature Range: $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Housing: LCP UL94V-0, BEIGE
 Contacts: PhosphorBronze/MATTE Sn-plated

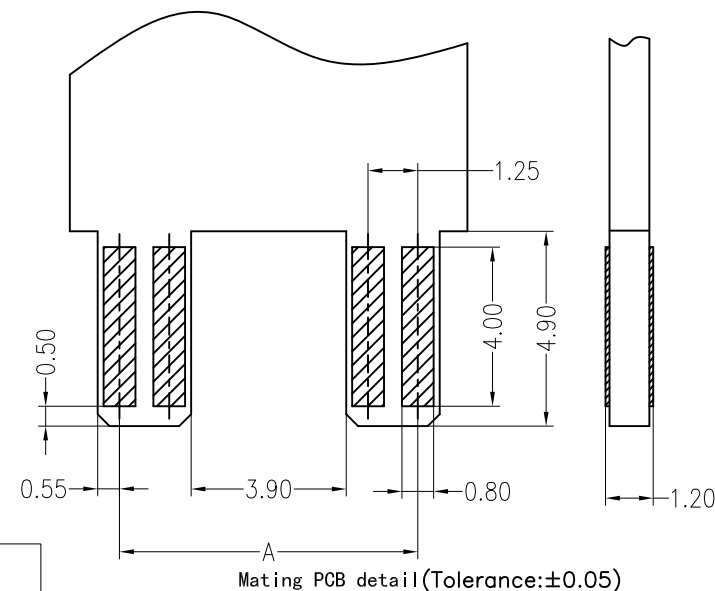

PIN	DIM A	DIM B
*2x4	7.50	10.00
*2x6	10.00	12.50

 东莞市溪榜电子有限公司
 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

GENERAL TOLERANCE		USE:	CUSTOMER
X. ± 0.50	X. $\pm 5^{\circ}$	APPD:	
X.X ± 0.30	X.X $\pm 2^{\circ}$	CHKD:	
X.XX ± 0.20	X.XX $\pm 1^{\circ}$	DR:	FangSongLe
UNITS: mm			

TITLE:		PART NO.:
-		L1251AWV-2**-F8MB1-R
DWG NO.:		
SCALE	SHEET	
1 : 1	1 / 1	