


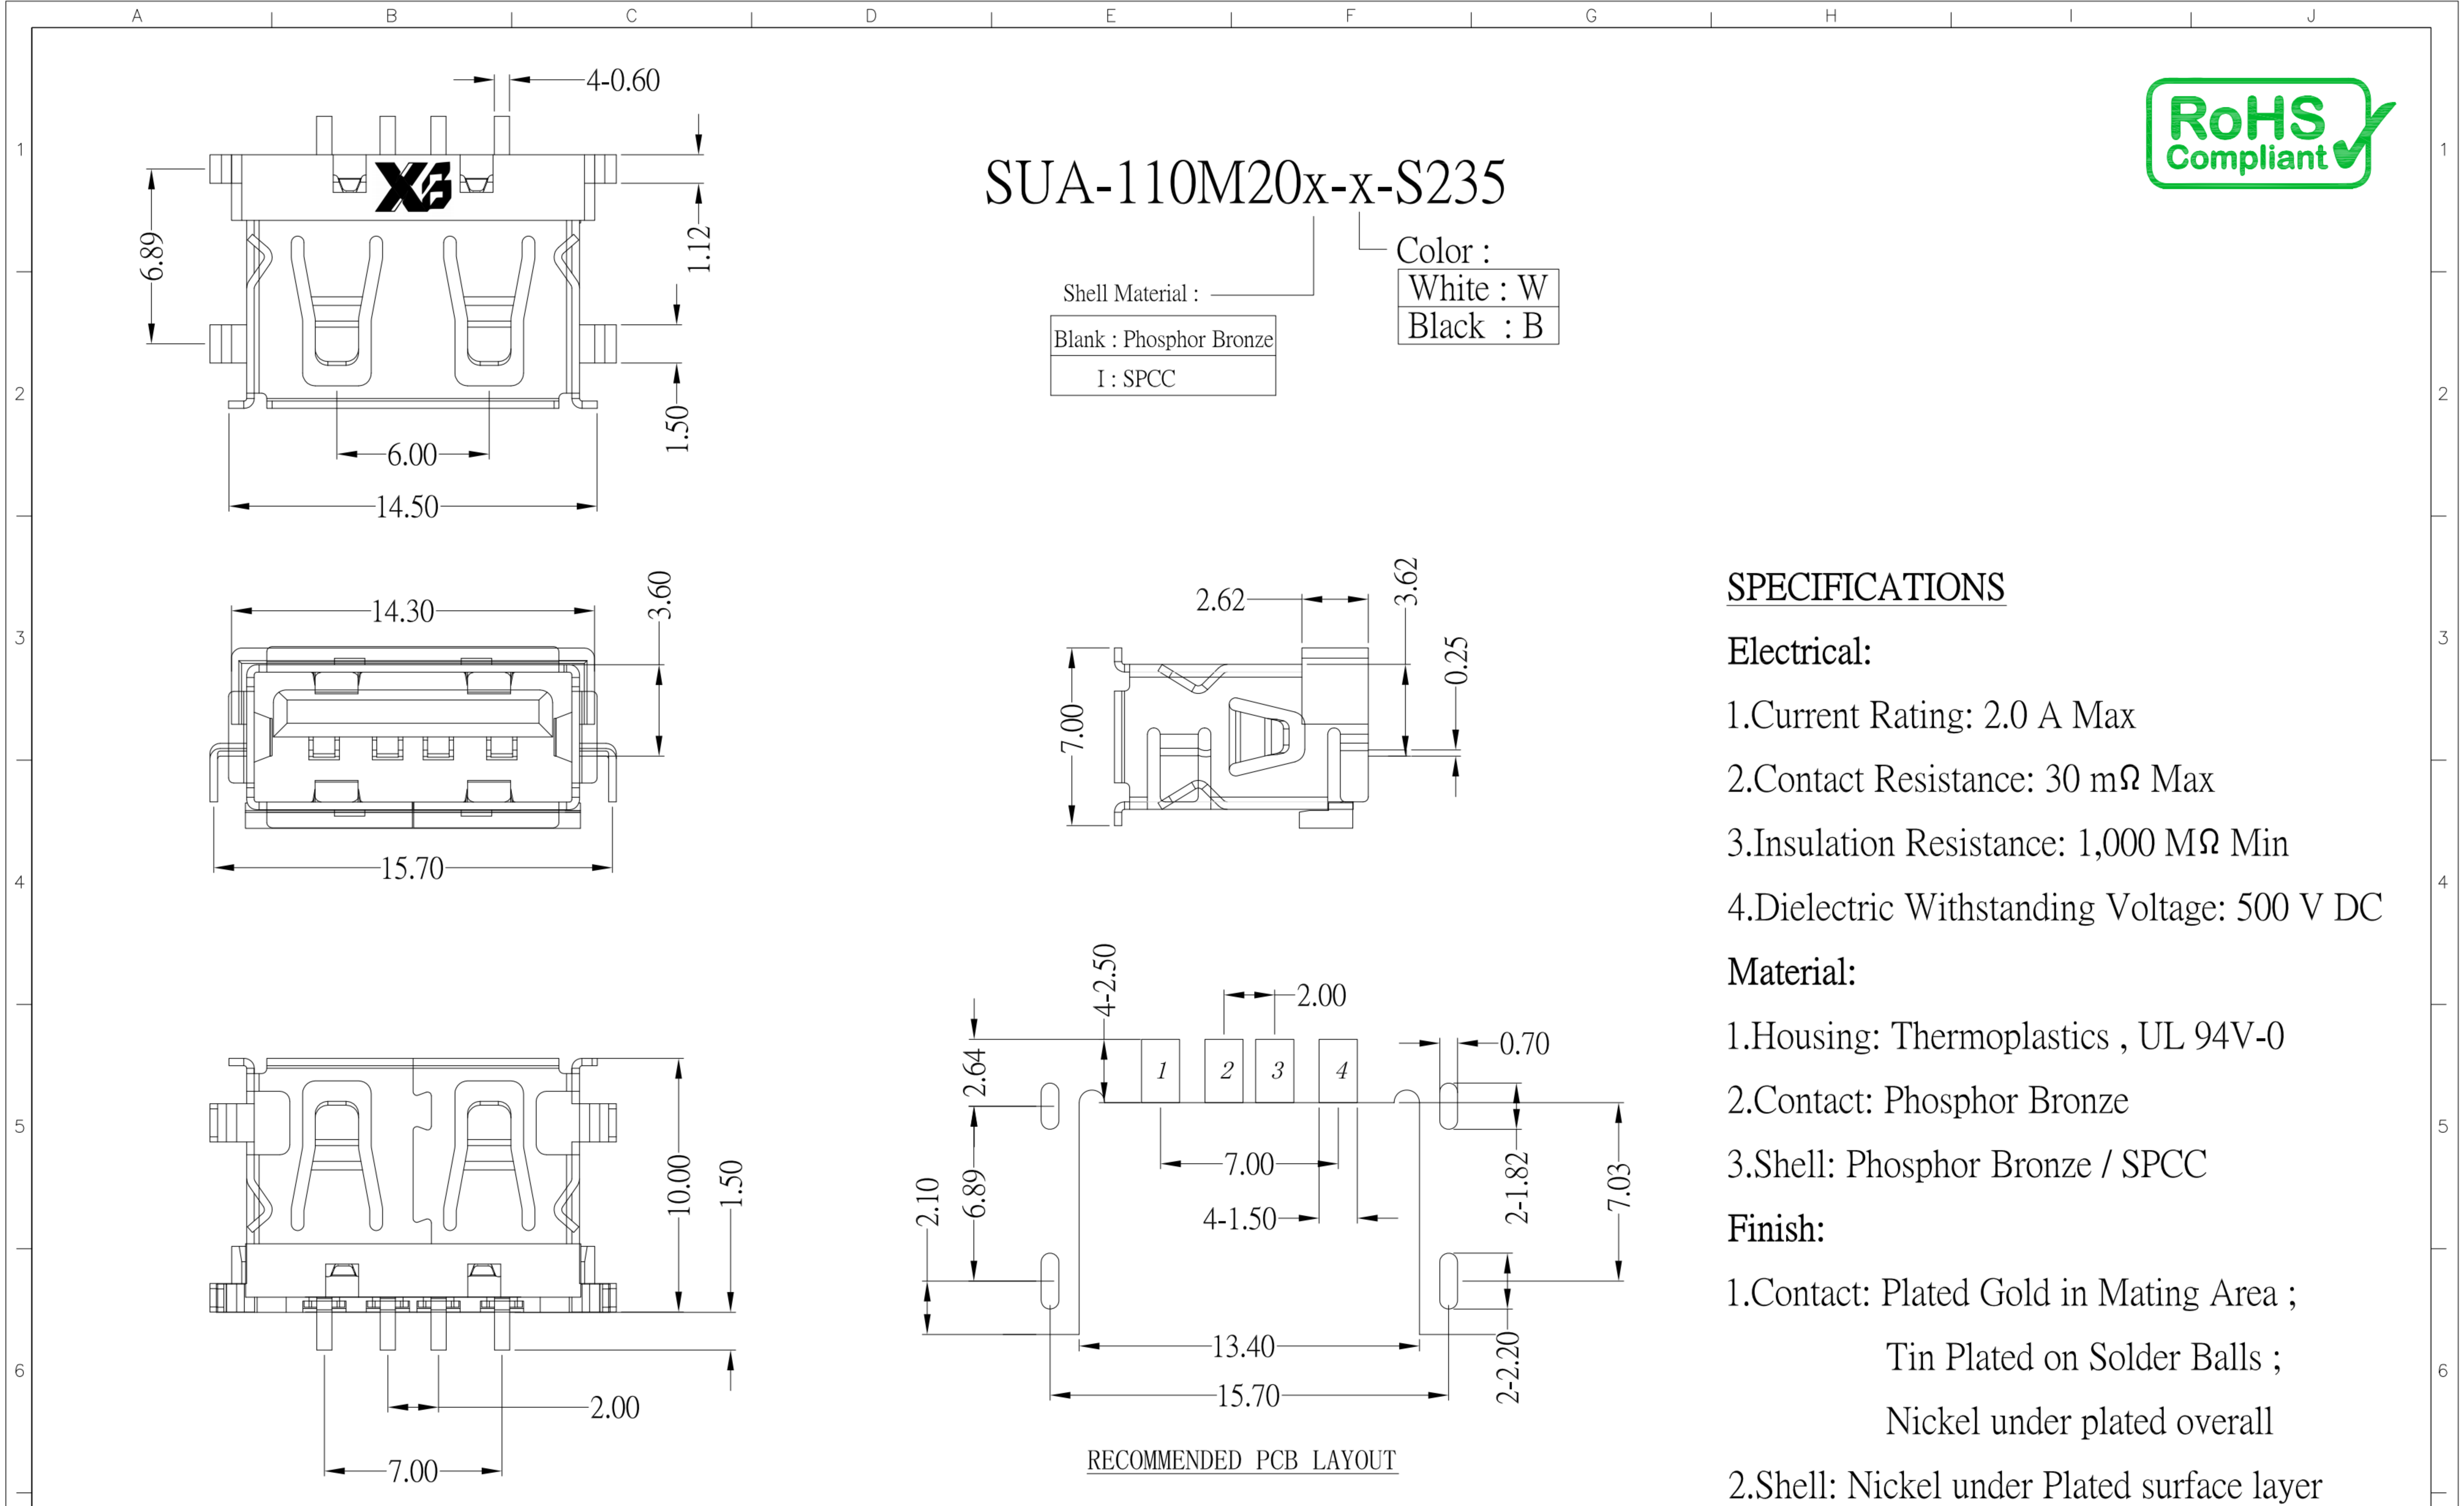

Electrical:

- 1.Current Rating: 2.0 A Max
- 2.Contact Resistance: 30 mΩ Max
- 3.Insulation Resistance: 1,000 MΩ Min
- 4.Dielectric Withstanding Voltage: 500 V DC

Material:

- 1.Housing: Thermoplastics , UL 94V-0
- 2.Contact: Phosphor Bronze
- 3.Shell: Phosphor Bronze / SPCC

Finish:

- 1.Contact: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
- 2.Shell: Nickel under Plated surface layer

				XGB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD	DRAWN BY: Jack Lu		DATE: 12/05/14	MAT'L		TITLE	CONNECTOR										
					CHECKED BY: Jacky Chen		DATE: 12/05/14	FINISH		MODLE	USB 2.0 AF 短體10.0mm 沉板,有捲邊 SMT										
					APPROVED BY: Tony Kao		DATE: 12/05/14	SCALE	1 : 1	DWG NO.	SUA-110M20x-x-S235	SIZE: A4									
ITEM NO.	DESCRIPTION		DRAWN		DATE	TOLERANCE UNLESS OTHERWISE STATED : Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°		3RD. ANGEL'S		UNITS	MM	SHEET NO.	1 of 1	PART NO.	SUA-110M20x-x-S235	VER: R					
				A	I	B	I	C	I	D	I	E	I	F	I	G	I	H	I	J	I