








SUA-110M16-x-S236

COLOR :

Black: B

White : W

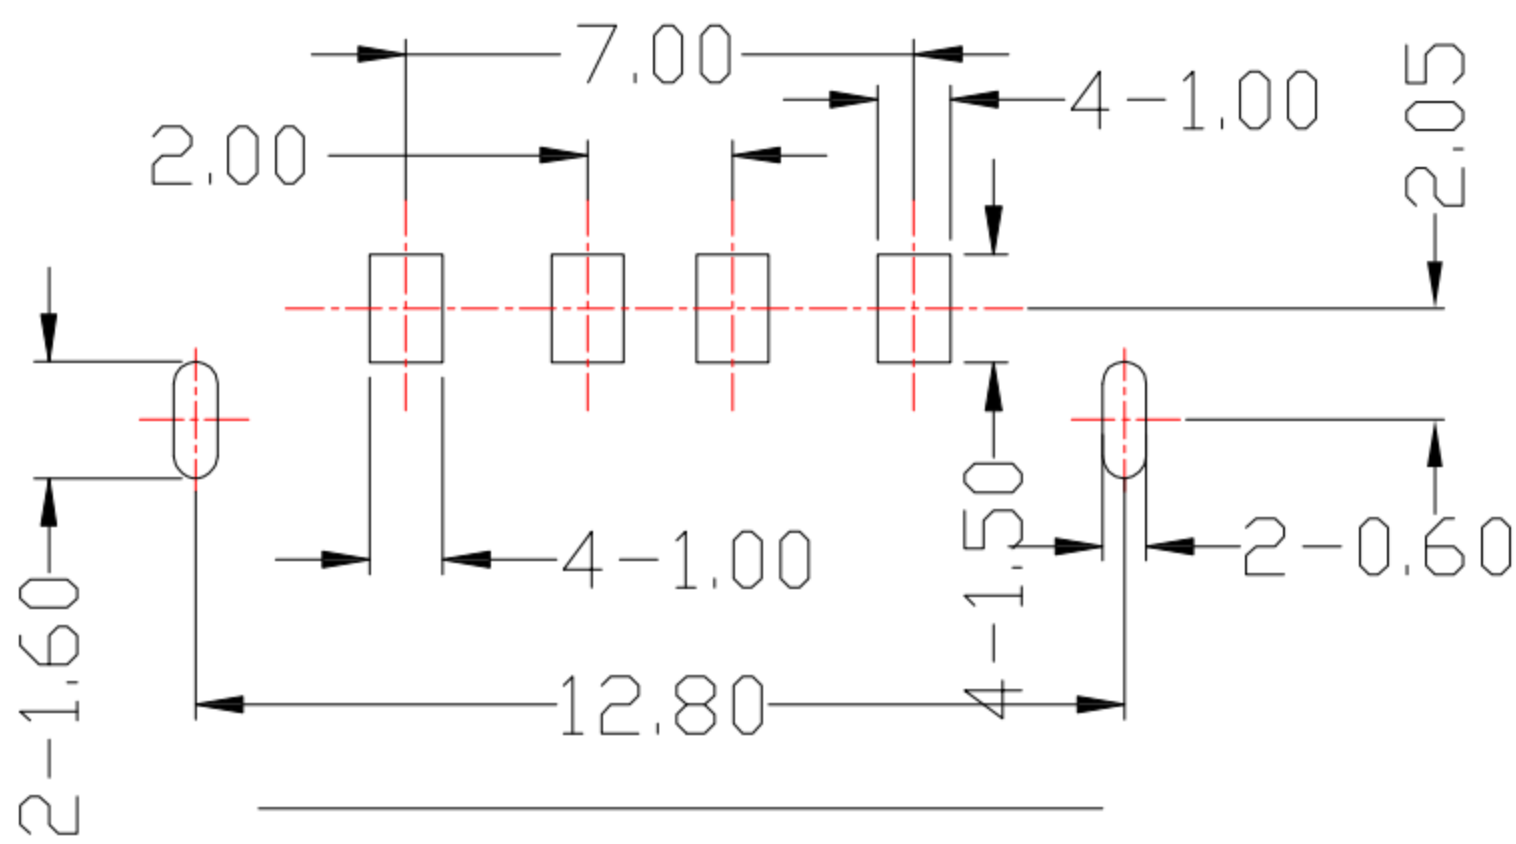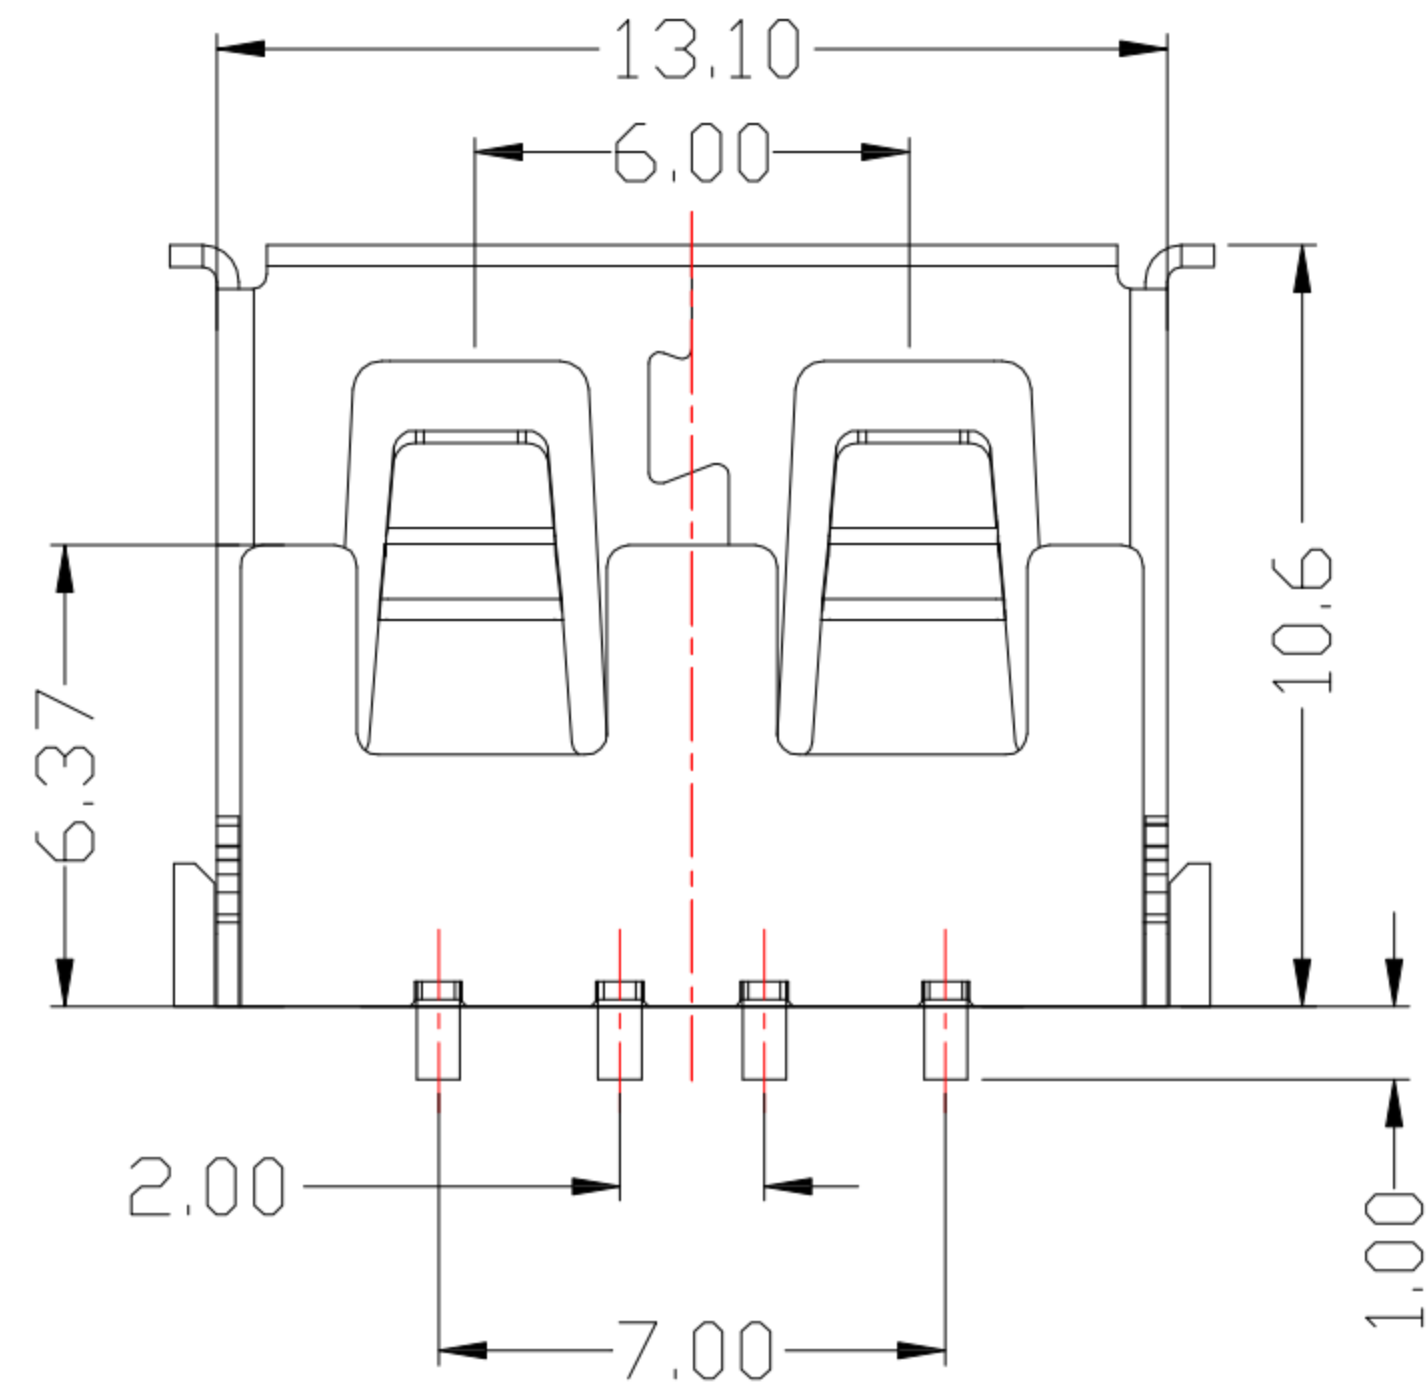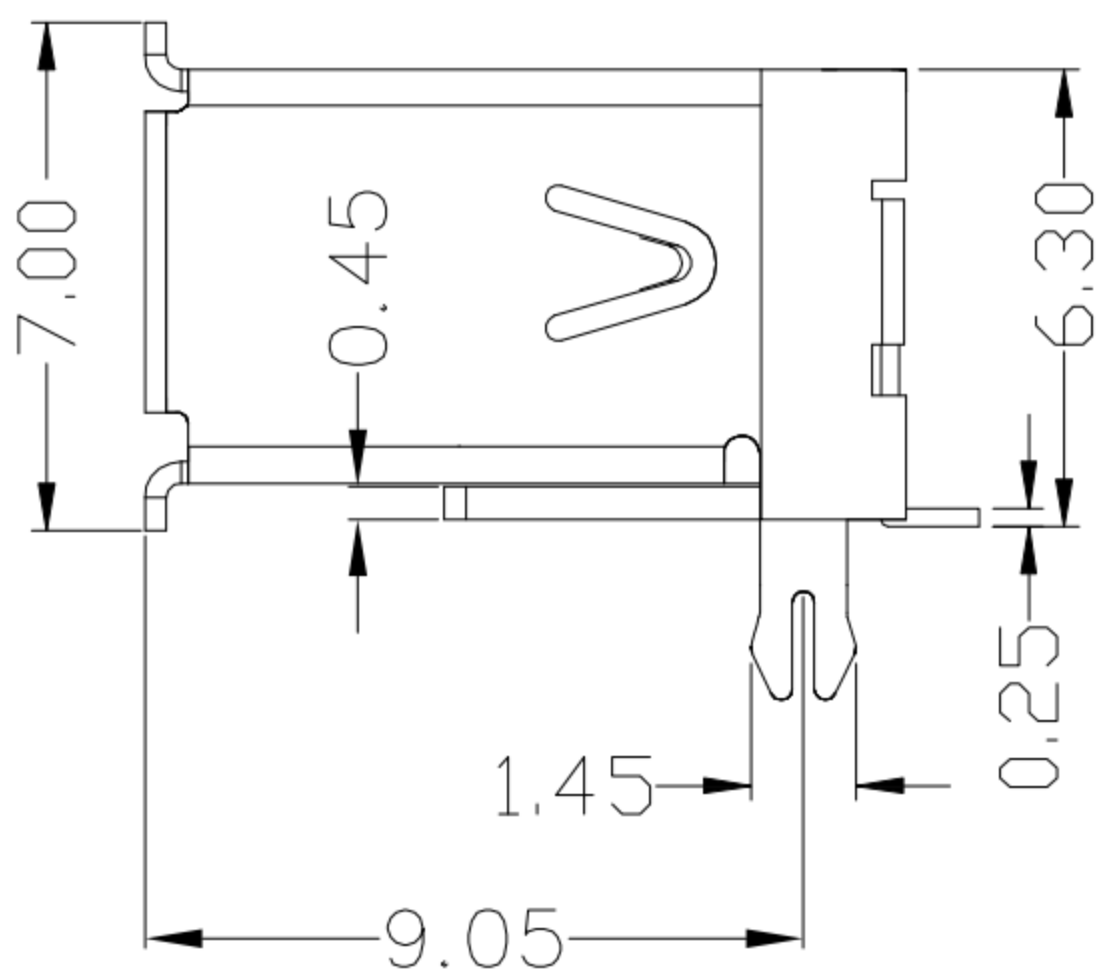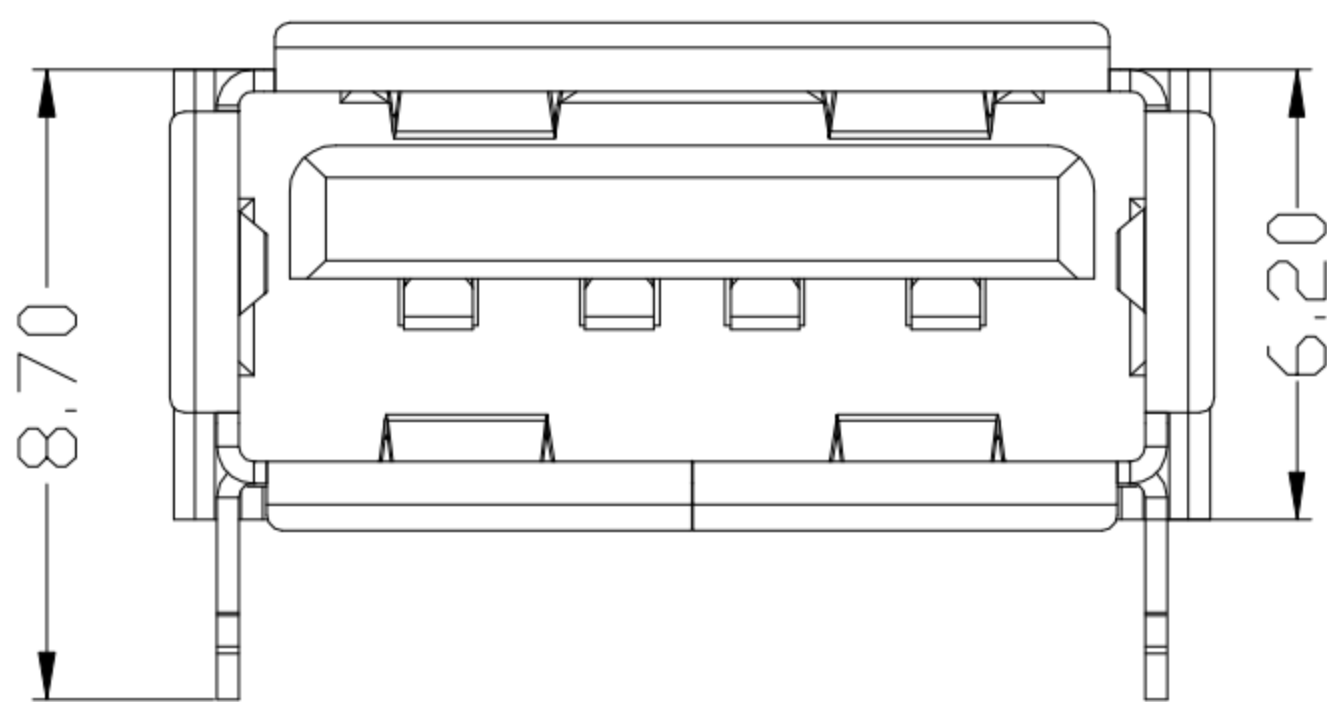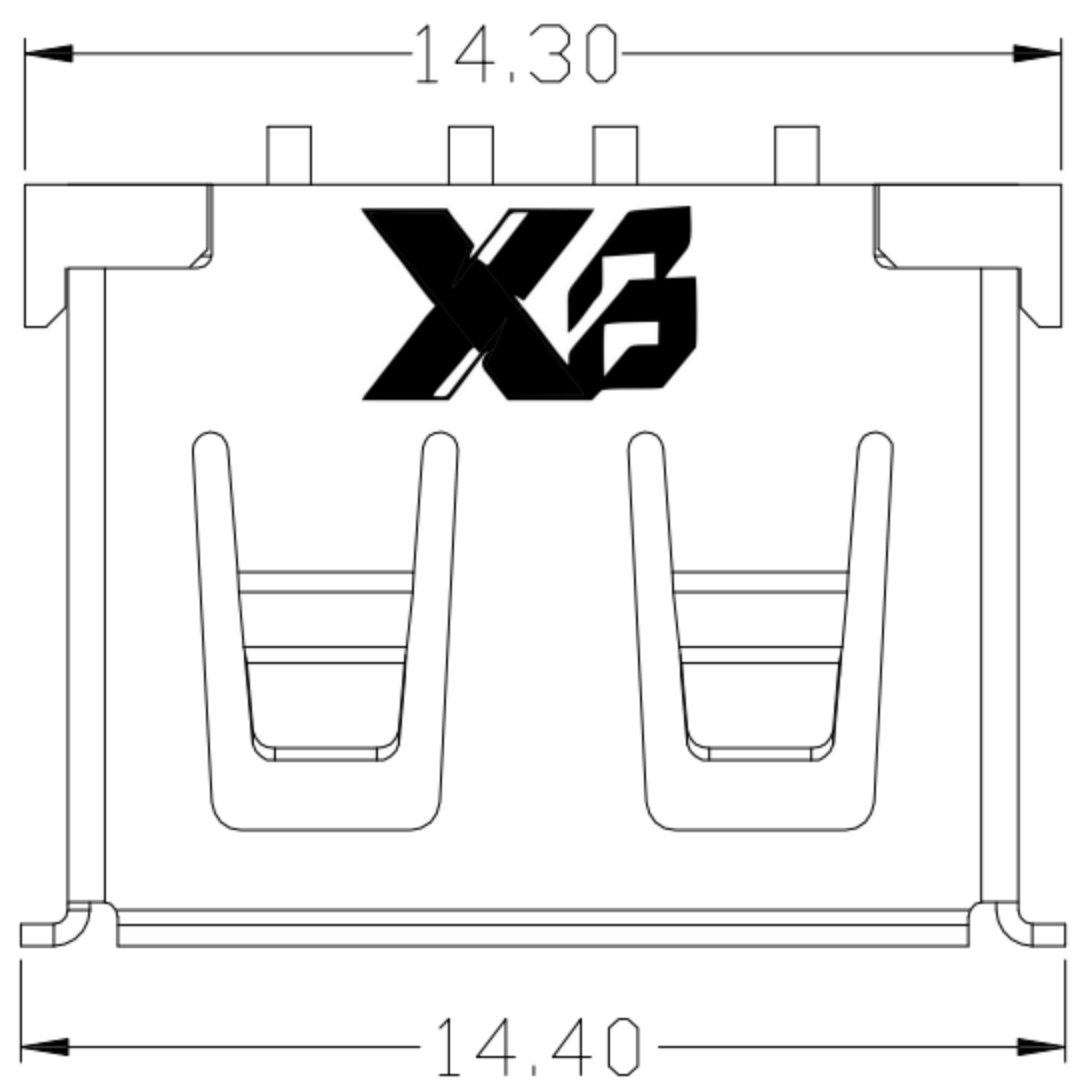

FRONT EDGE OF CONNECTOR

P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

Electrical:

- 1.Contact Resistance: 30 mΩ Max
- 2.Dielectric Withstanding Voltage: 500 V AC FOR 1 MIN
- 3.Insulation Resistance: 1,000 MΩ Min
- 4.Operating Temperature: -55°C ~ 85°C


Mechanical:

- 1.Connector Mate and Unmate Force
 - Mate force: 35N(3.57 kgf) Max
 - Unmate force: 10~35N(1.02~3.57 kgf) Min



TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 05/12/20

CHECKED BY: DATE

Jacky Chen 05/12/20

APPROVED BY: DATE

Tony Kao 05/12/20

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

CONNECTOR

USB A/F 短體10.6 後2 腳,H:6.2 ,SMT腳

SUA-110M16-x-S236

SUA-110M16-x-S236

SIZE

A4

VER

R