

RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	09/24'20	WZX	/	SUNNLY



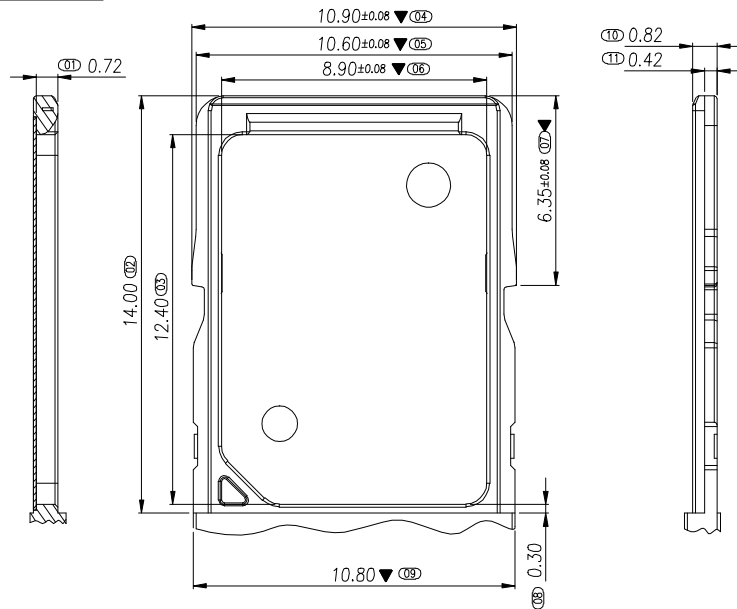



TABLE:

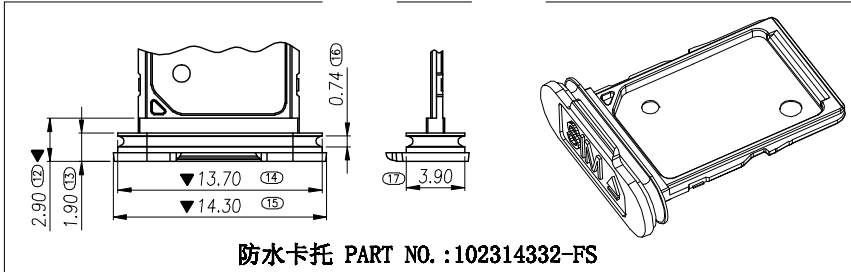


防水卡托 PART NO. :102314332-FS

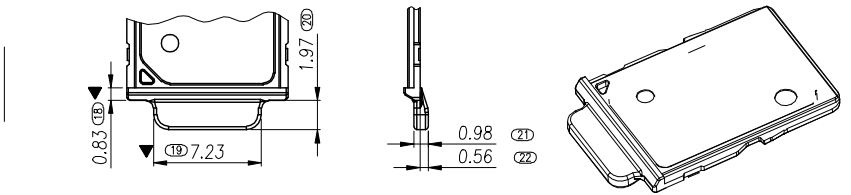

普通卡托 PART NO. :102314332-TY

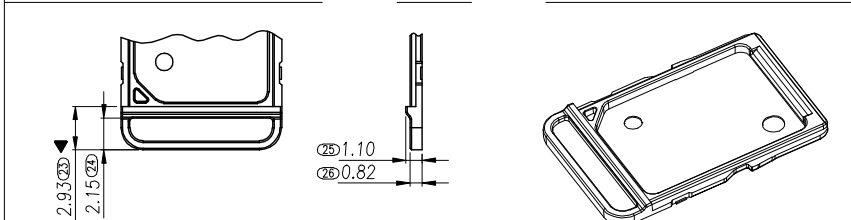

普通卡托 PART NO. :102314332-PZ


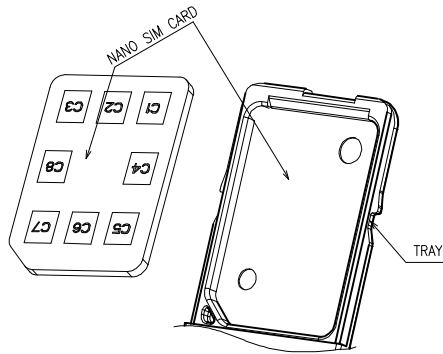


卡片放置方向

ITEM	PART NAME	Q'TY	MATERIAL	FINISH
1	HOUSING	1	Polycarbonate	Black UL94V-0
2	SHELL	1	Stainless Steel	PLATING:Rinse

MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
X* ± Z'	X* ± Z'	MAT'L				
.X ± 0.30	.XX ± 0.012	SEE NOTES				
.XX ± 0.20	.XXX ± 0.008	FINISH				
.XXX ± 0.15	.XXXX ± 0.004	SEE NOTES				
		QTY				
		SEE NOTES				
		CHKD:				
		DR:				
				PART NUMBER: XB-102314332		
				TITLE: 1.381 NANO SIM 卡托		
				APPD:		
				DWG NO.: C-102314332-PZ-00		
				SCALE 1:1		
				SHEET 1/1		
				REV. A0		

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
AO	_____	NEW RELEASE	2020.09.22	MO	TEDDY	SUNNLY

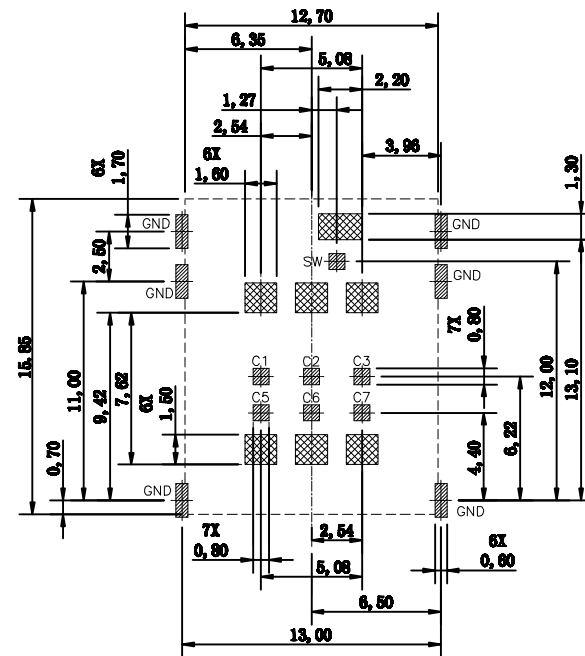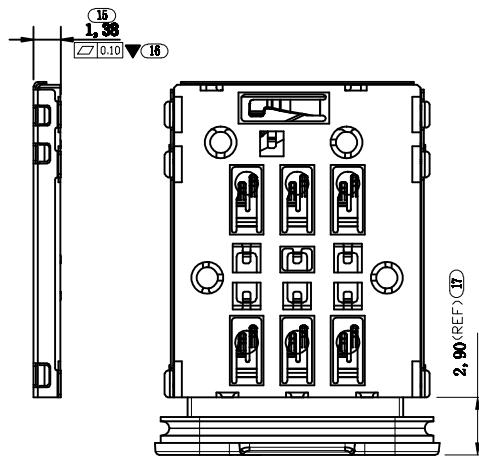


1.General Characteristics
Dimensions:12.85Lx17.20Wx1.38H mm
TRAY MATING FORCE:2~10N
TRAY UNMATING FORCE:14~10N
Durability:1,500 cycles min.
2.Electrical Characteristics
Contact resistance:50mΩ typical,
100mΩMax
Insulation resistance:>1000m/500V DC
3.Solderability
Vaporphase:215°C, 30sec.Max
IR reflow:260°C,3sec.Max
Manual soldering:370°C,3sec.Max
4.Environmental Characteristics
Operating temperature:-40°C~+85°C
Operating humidity:10%~95%RH

RECOMMENDED P.C.B LAYOUT
COMPONENT SIDE(TOLERANCE ± 0.05)

	PAD AREA
	KEEP AREA
	NO PATTERN AND VIA HOLE IN THIS AREA


ITEM	PART NAME	Q'TY	MATERIAL	FINISH
1	HOUSING	1	Hi-temp Thermoplastic	Black UL94V-0
2	CONTACT	1	Copper Alloy	Contact area:Gold plated
3	SHELL	1	Stainless Steel	Solder area:Gold plated

MILLIMETERS		INCH		UNITS		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
X.* ± Z"		X.* ± Z'		MM		PART NUMBER: XB-102314332	
.X ± 0.38		.XX ± 0.012		MAT'L			
.XX ± 0.25		.XXX ± 0.008		SEE NOTES			
.XXX ± 0.15		.XXXX ± 0.004		FINISH		TITLE: (NS004-010) 1.36H Pin_Push N_S1M	
				SEE NOTES			
				APPD:			
				QTY		DWG NO.: C-102314332-00	
				CHKD:			
				DR:			
							
						SCALE 1:1	
						SHEET 1/2	
						REV. A0	

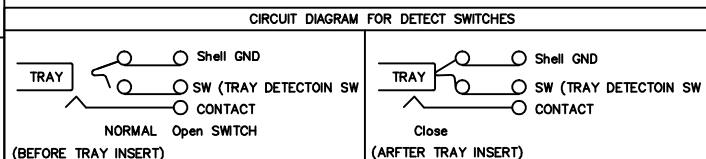


RoHS

USER DIRECTION OF UNREELING

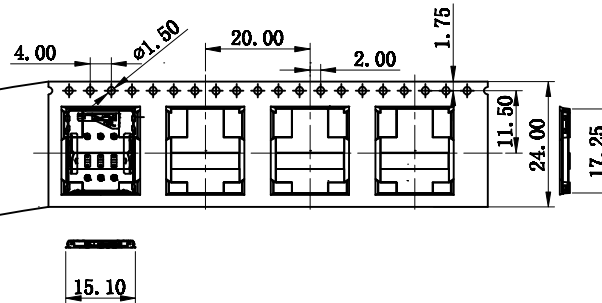

NOTES




1. NUMBER OF CONNECTORS:1500PCS/REEL
2. LEAD TAPE LENGTH

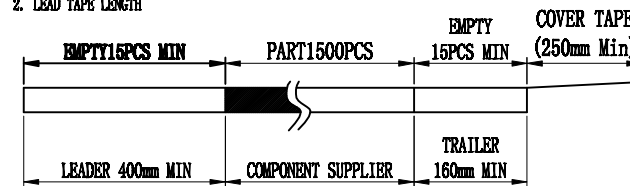



3. QUANTITY:15000PCS/CARTON

COVER TAPE PEELING ANGLE:165°~180°
PEELING FORCE:20~130g

CARRIER TAPE




Each top of the bottom of the carton is protected by a piece of pearl cotton



10 rolls per carton

Tape type sealing box



MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X' ± 2'	X' ± 2'	MAT'L					
.X ± 0.38	.XX ± 0.012	SEE NOTES					
.XX ± 0.25	.XXX ± 0.008	FINISH					
.XXX ± 0.15	.XXXX ± 0.004	SEE NOTES					
		QTY					
		SEE NOTES					

PART NUMBER: XB-102314332		TITLE: (NS004-010) 1.381 Pin Push N_SIN	
APPD:		DWG NO.: C-102314332-00	
CHKD:		SCALE	
DR:		SHEET	
		REV.	
		1:1	
		2/2	
		A0	