
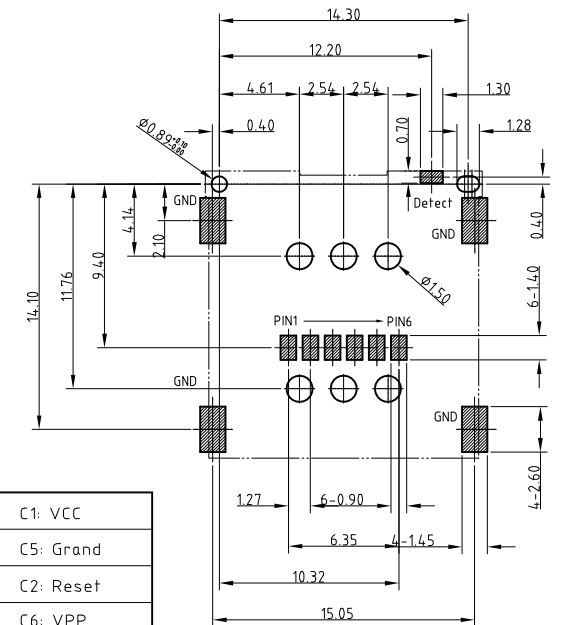
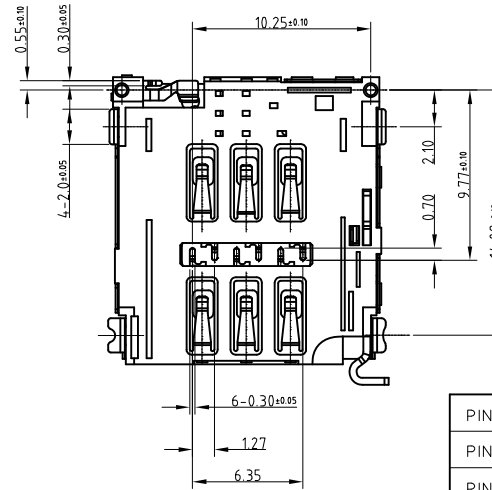


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/12'16	YZZ		HAIYONG

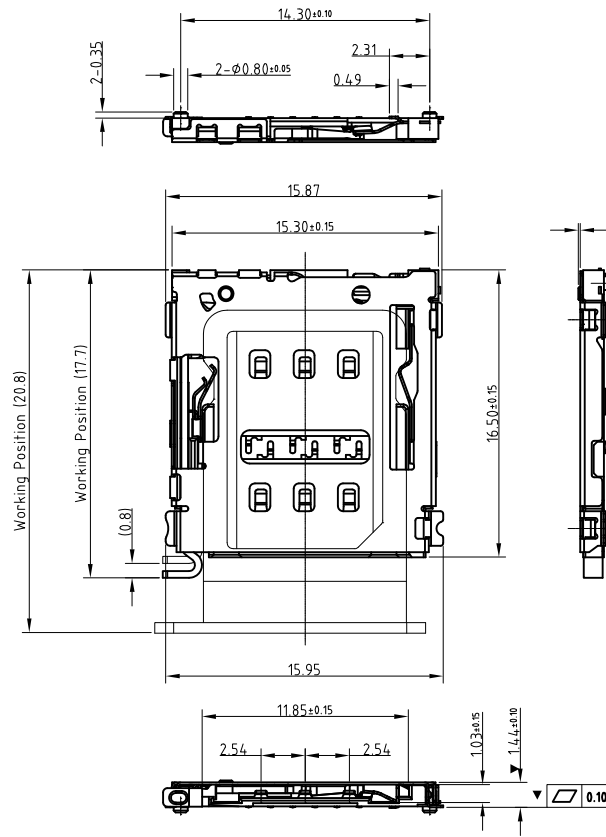


PIN 1#	C1: VCC
PIN 2#	C5: Grand
PIN 3#	C2: Reset
PIN 4#	C6: VPP
PIN 5#	C3: Clock
PIN 6#	C7: I/O

Recommended PCB Layout
Tolerance: ±0.05

NOTE:

1. Material & Finish See Table;

2. Circuit Diagram For Switch




3. Characteristic:

- 3-1.Current Rating :1A max.
- 3-2.Contact Resistance:50mOhms max
- 3-3.Insulation Resistance:100MOhms min./500VDC
- 3-4.Dielectric Withstanding Voltage:500VAC/1minute
- 3-5.Mating Force: 10N Max, Withdrawal Force: 1N Min.;
- 3-6.Durability: 1500 Cycles

3-7.Operating Temperature:-25°C to+85°C

4. Critical Dimensions Marked "▼" Should Check By QC.



6	Shell	Stainless Steel	Nickel Under Plated Overall.
5	Lever	Stainless Steel	/
4	Cam	Stainless Steel	/
3	Housing	Thermoplastics	Black,UL94V-0
2	Detect	Copper Alloy	Gold Flash on Solder Tails and Contact Area; Nickel Under Plated Overall.
1	Terminal	Copper Alloy	Gold Flash on Solder Tails and Contact Area; Nickel Under Plated Overall.
Item	Part Name	Material	Description

MILLIMETERS	INCH	UNITS	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				
X° ± 2'	X° ± 2'	MAT'L					
.X ± 0.30	.XX ± 0.012	SEE NOTES					
.XX ± 0.20	.XXX ± 0.008	FINISH					
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES					
		QTY	CHKD:				
		SEE NOTES	DR:				
			PART NUMBER: XB-402013622	TITLE: 15H Nano SIM Card CONN With Detect			
			APPD:	DWG NO.: C-402013602-00			
					SCALE 1:1	SHEET 1/2	REV. A1