






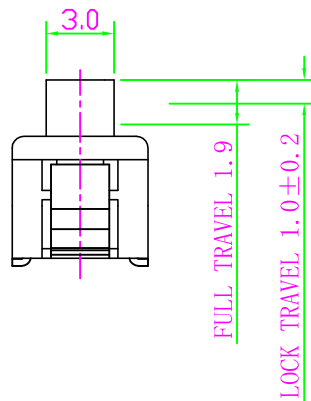
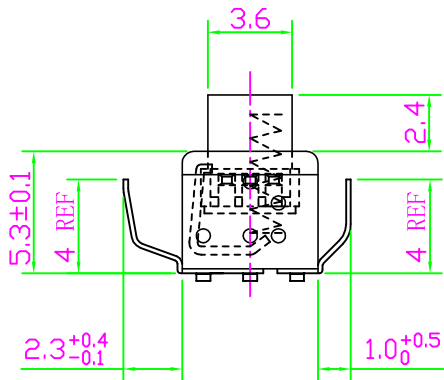


REV NO/版次	REVISION NOTE/修订注释	DATE/日期	SIGNATURE/签名

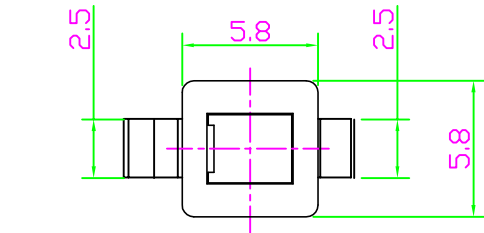

ELECTRICAL CHARACTERISTICS

1. RATING: DC 3 0 V 0. 5A
2. CONTACT RESISTANCE: 2 Ω MAX
3. INSULATION RESISTANCE: 100MΩ MIN
4. DIELECTRIC STRENGTH: AC 250V (50~60Hz) /60S

MECHANICAL CHARACTERISTICS

1. PRACTICAL TEMPERATURE RANG: -40℃ ~+85℃
2. OPERATING FORCE: 180±50gf
3. MECHANICAL LIFE: 10,000 cycles

9	CONTACTPIECE-2	SUS	1	NATURAL
8	CONTACTPIECE-1	SUS	1	NATURAL
7	TERMINAL	BRASS STRIP	6	Ag PLATED
6	CASE	PA66	1	GRAY
5	LOCK PIN	SUS WIRE	1	NATURAL
4	SPRING	SUS WIRE	1	NATURAL
3	CONTACT	BRONZE	2	Ag PLATED
2	KNOB	PBT	1	WHITE
1	COVER	PPA	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

GENERAL TOLERANCE 未指的公差		TITLE 名称 XB-5858P-2PM		
X. ± 0.5	X. ° ± 5°			
.X ± 0.3	.X ° ± 2°			
.XX ± 0.2	.XX ° ± 1°			
.XXX ± 0.1	.XXX ° ± 0.5°			
APPROVAL 审批	CHECKED 核准	DRAWN 设计	UNIT 单位 (mm)	SCALE 比例 1:1
				REV.