

[illegible]

NOTES:

1) MATERIAL:

- HOUSING: LCP UL 94V-0
- CONTACT: C5210R-H, T=0.15
- SHELL: SUS304, T=0.15
- MYLAR: POLYESTER


2) FINISH :

- CONTACT: GOLD FLASH PLATED ON CONTACT AREA;
- GOLD FLASH PLATING ON SOLDER TAILS, WITH ENTIRE CONTACT UNDERPLATED



50u"Min, NICKEL

- SHELL: 50u"Min. NICKEL UNDERPLATED OVERALL ,
- GOLD FLASH PLATED ON SOLDER TAILS

3) INFRARED REFLOW SOLDERING: 10sec. Min. at 260 ± 10



PIN NO.	DESCRIPTION
P1#	C1:VCC
P2#	C5:GND
P3#	C2:RST
P4#	C6:VPP
P5#	C3:CLK
P6#	C7:I/O
P7#	POL
P8#	DET




MILLIMETERS	INCH	UNITS
$X^{\circ} \pm 2^{\circ}$	$X^{\circ} \pm 2^{\circ}$	MM
$.X \pm 0.30$	$.XX \pm 0.012$	MAT'L
$.XX \pm 0.20$	$.XXX \pm 0.008$	SEE NOTES
$.XXX \pm 0.10$	$.XXXX \pm 0.004$	FINISH
		SEE NOTES
		QTY
		SEE NOTES

XBG 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

102313572	异脚镀金G/F
102013572	异脚镀银80U
成品料号	规格

PART NUMBER: XB-102313572	TITLE: 2.3H 6+2Pin PUSH PUSH CARD		
APPD:	DWG NO.: C-102013572-00		
CHKD:		SCALE	SHEET
DR:		1:1	1/2
			REV. A3

图一

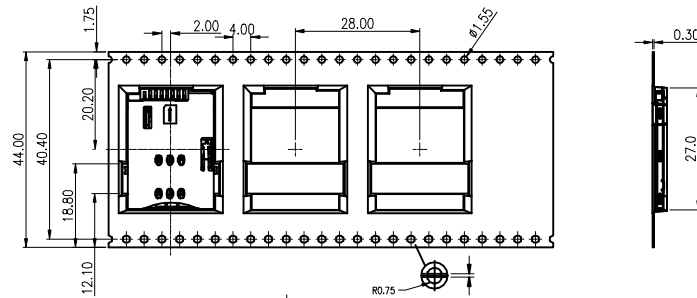


COVER TAPE

放料方向

200mm Min 560mm Min Q'TY 560mm Min 300mm Min
20 EMPTY CARRIER TAPE 20 EMPTY CARRIER TAPE

图二

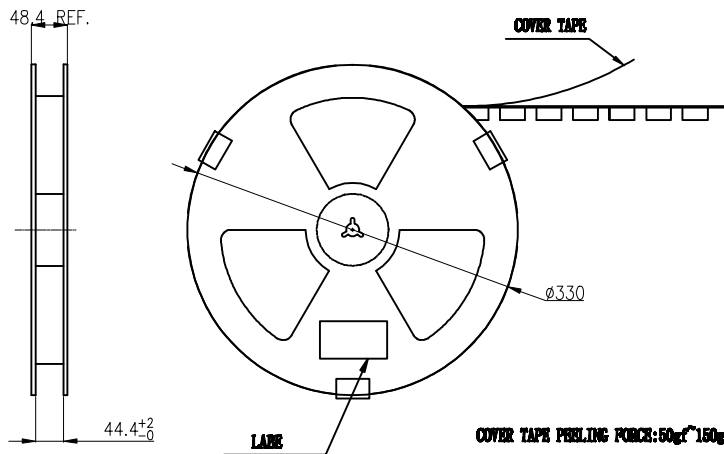

COVER TAPE PEELING FORCE: 50gf~150gf


PEEL OFF DIRECTION

165°180°

TABLE 1 PACKAGING QUANTITY

QTY/REEL	REEL/CARTON	QTY/CARTON
550	6	3300

图三

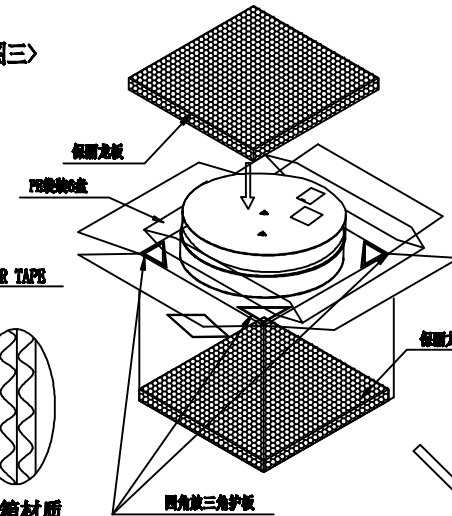

6 Reel + 2 PCS

防水袋

备注:

1. 依图一所示放置产品于Carrier tape中, 每穴放置1PCS产品, Carrier tape卷绕时, 前端和尾端各需预留20PCS空格.
2. Cover tape覆盖Carrier tape前端需超出200mmMIN, 后端需超出300mmMIN, 两端都以英文胶贴固.
3. 包装机包好后, 在Reel的个等分点贴上胶带, 以防止REEL来开, 每Reel贴1PCS标签, 如图二所示
4. 包装数量见图一所示
5. 包装成箱见图三所示
6. 封箱, 在封好的纸箱侧面中间位置贴出出货标签.

MILLIMETERS	INCH	UNITS	MM
X" ± 2"	X" ± 2"	MAT'L	
.X ± 0.30	.XX ± 0.012	SEE NOTES	
.XX ± 0.20	.XXX ± 0.008	FINISH	
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES	
		QTY	
		SEE NOTES	



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

PART NUMBER:
XB-102313572

TITLE:
2.3H 6+2Pin PUSH PUSH CARD

APPD:

DWG NO.:

C-102013572-00

CHKD:

DR:

SCALE

SHEET

REV.

1:1

2/2

A3