

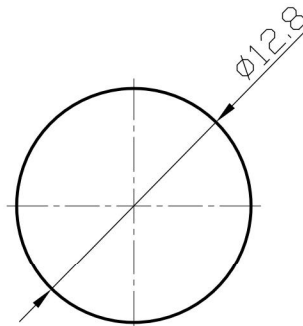
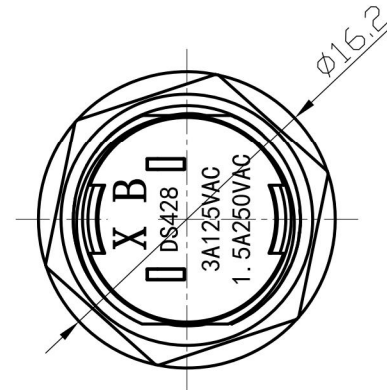


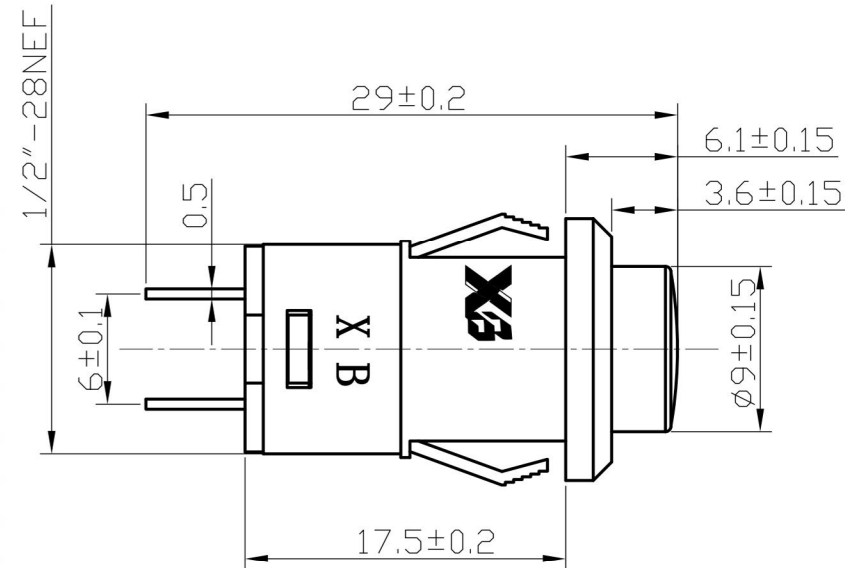

安装尺寸

SCHEMATIC

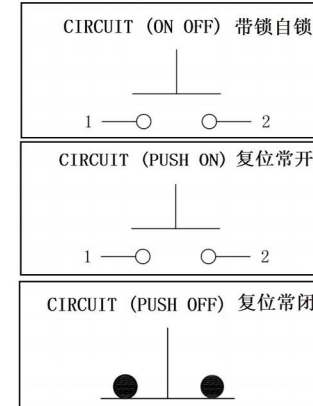

电气原理图

ROHS

W	白色
B	黑色
G	绿色
Y	黄色
R	红色
上盖颜色 X	
Cap color X	

MATERIAL:

Actuator: SUS ;
Top Base: SUS;
Buttom Base:PA66+GF ;
Terminal: Brass,Silver plated ;
Nut: Brass, Ni plated .

技术要求:

- 电气性能
额定电流/电压:3A/125VAC 1.5A/250VAC;
接触电阻:≤100mΩ;
绝缘电阻:≥100MΩ;
介电强度:≥1500VAC/1min;
- 环境温度:-20℃~85℃;
- 未注公差均按GB / T1804-m级。


The material contained in this drawing is the property of XiBang. Any use other than that specfically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : PUHS BUTTON SWITCH

MODEL : XB-DS-428K-FW



TOLERANCE
≤1.5mm±0.1
> 1.5mm±0.2
>=10mm±0.3

ANGLE
±2°

UNIT : MM	DWN.	ZENQ. CHEN	DATE						
SCALE : 3 : 1	CHK'D	PENG. GAO	DATE						
VERSION	01	APPD.	FEI. LONG. HE	DATE					
NO.	PART NAME	MATERIAL	QTY.	FINISHING					