

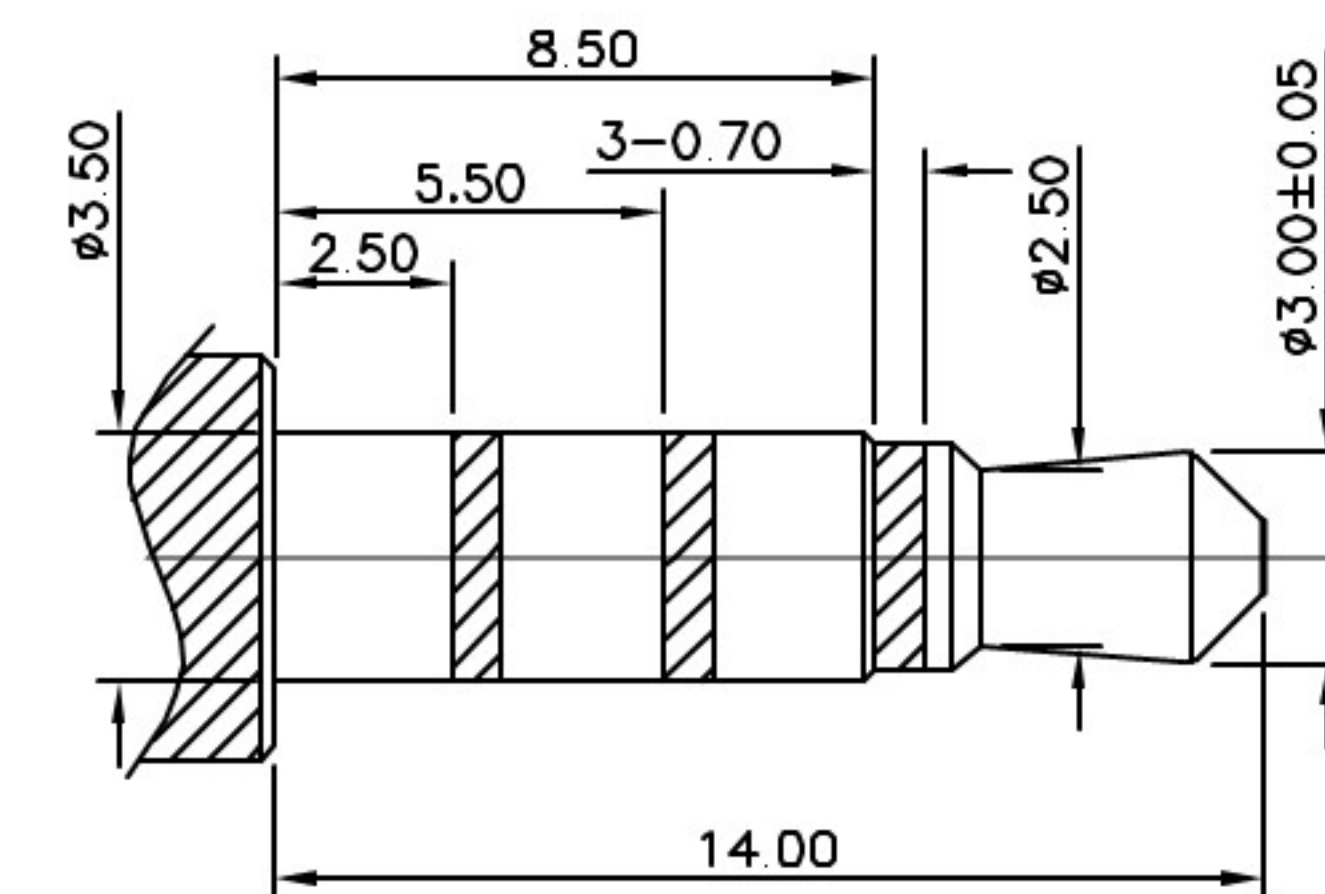
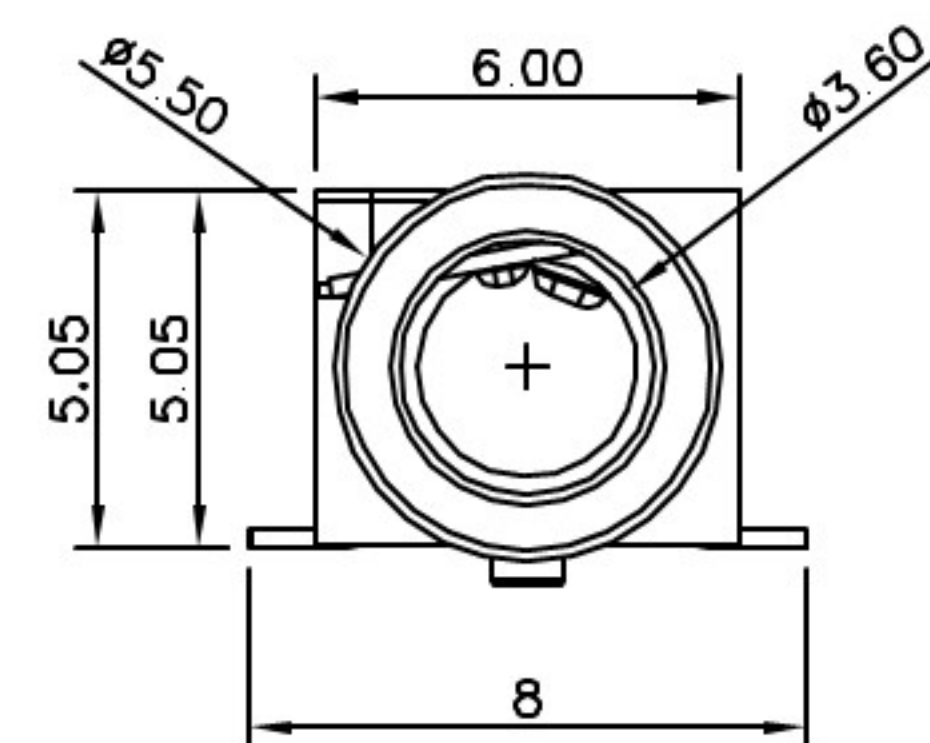



REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2018.06.14

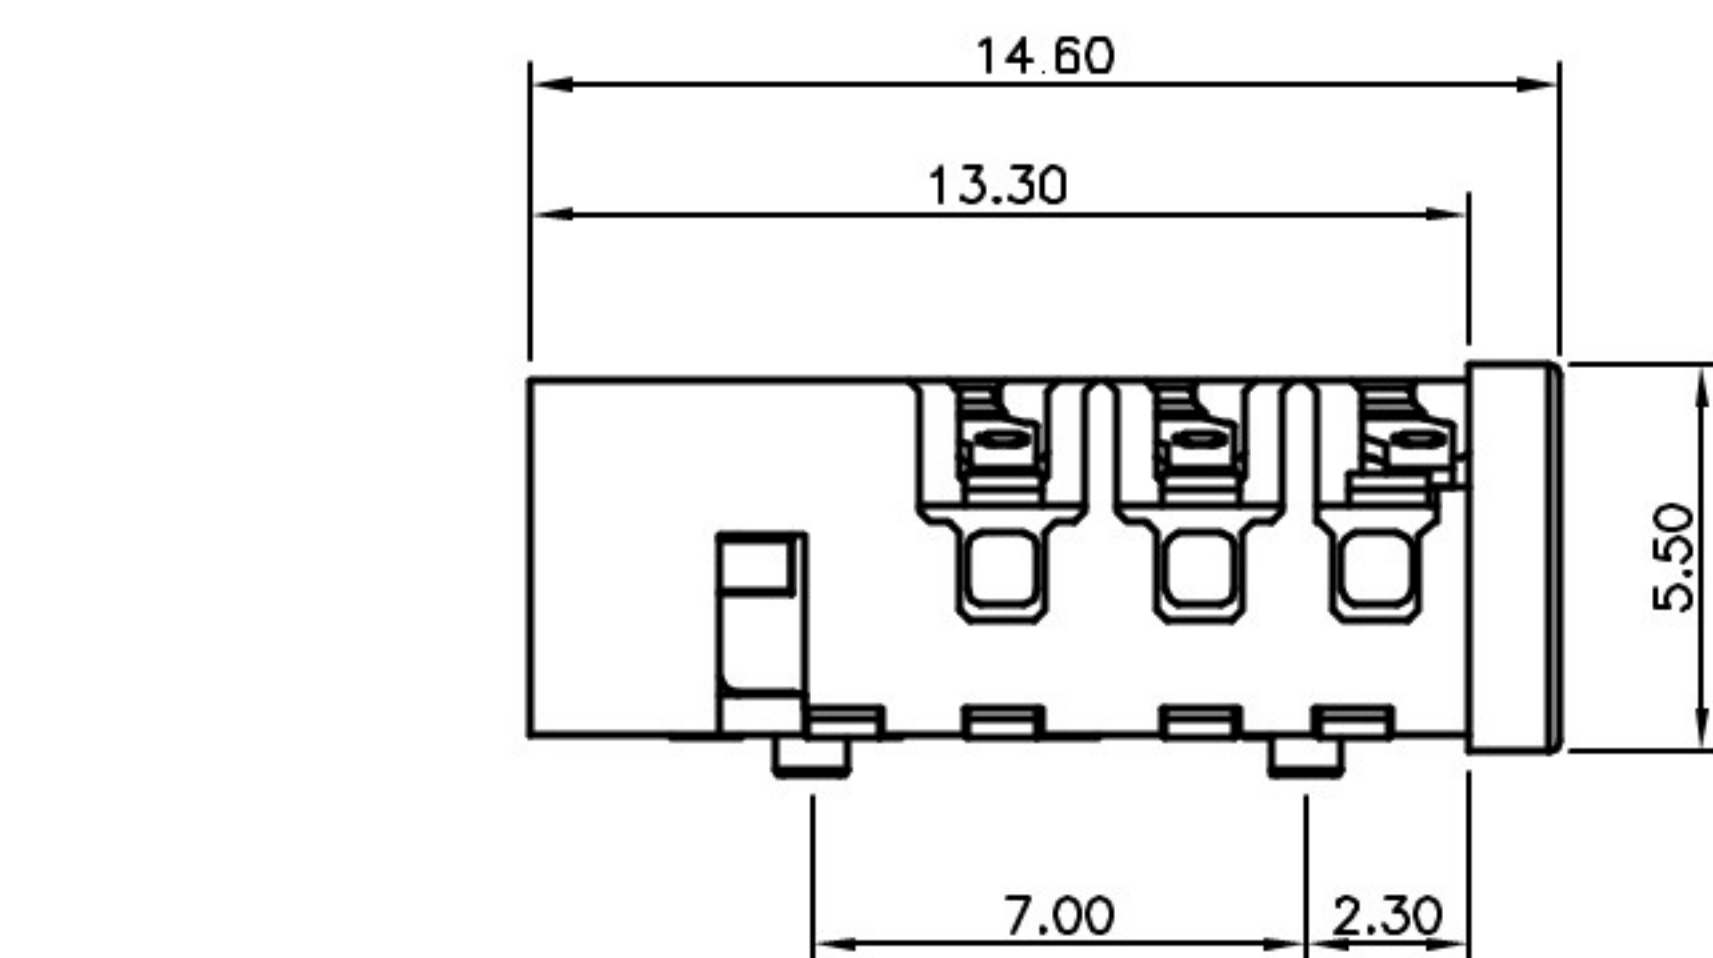


(Ø3.50mm 4 POLE PLUG DETAIL DRAWING)

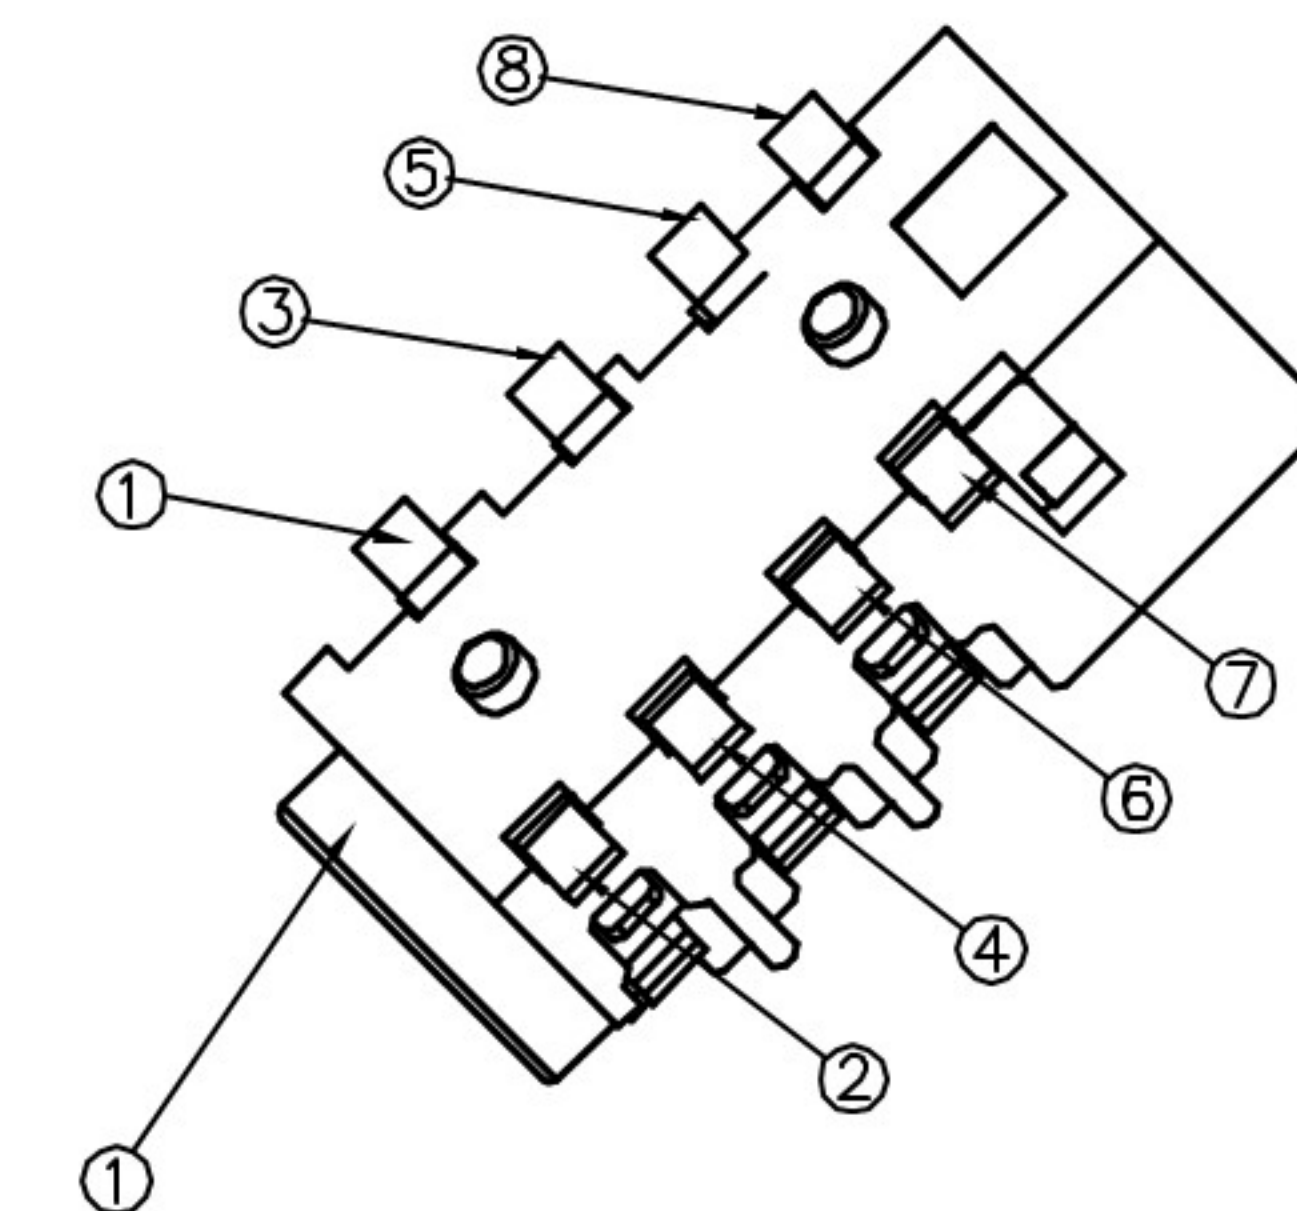


3D VIEW

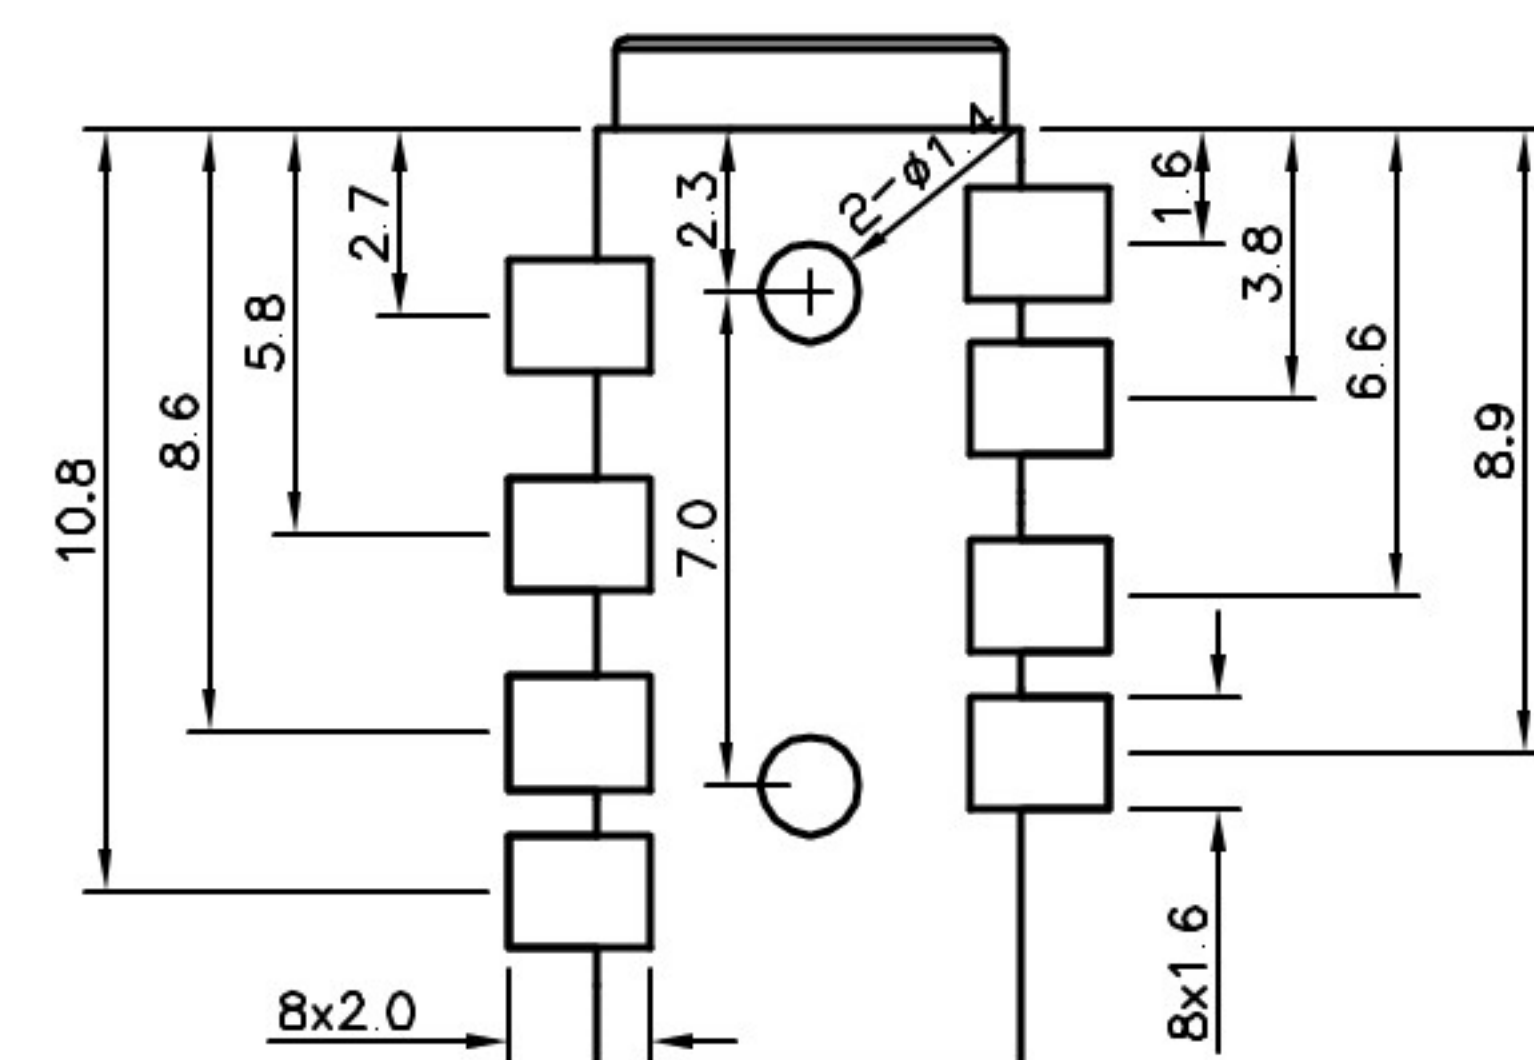

P. C. B LAYOUT TOP VIEW

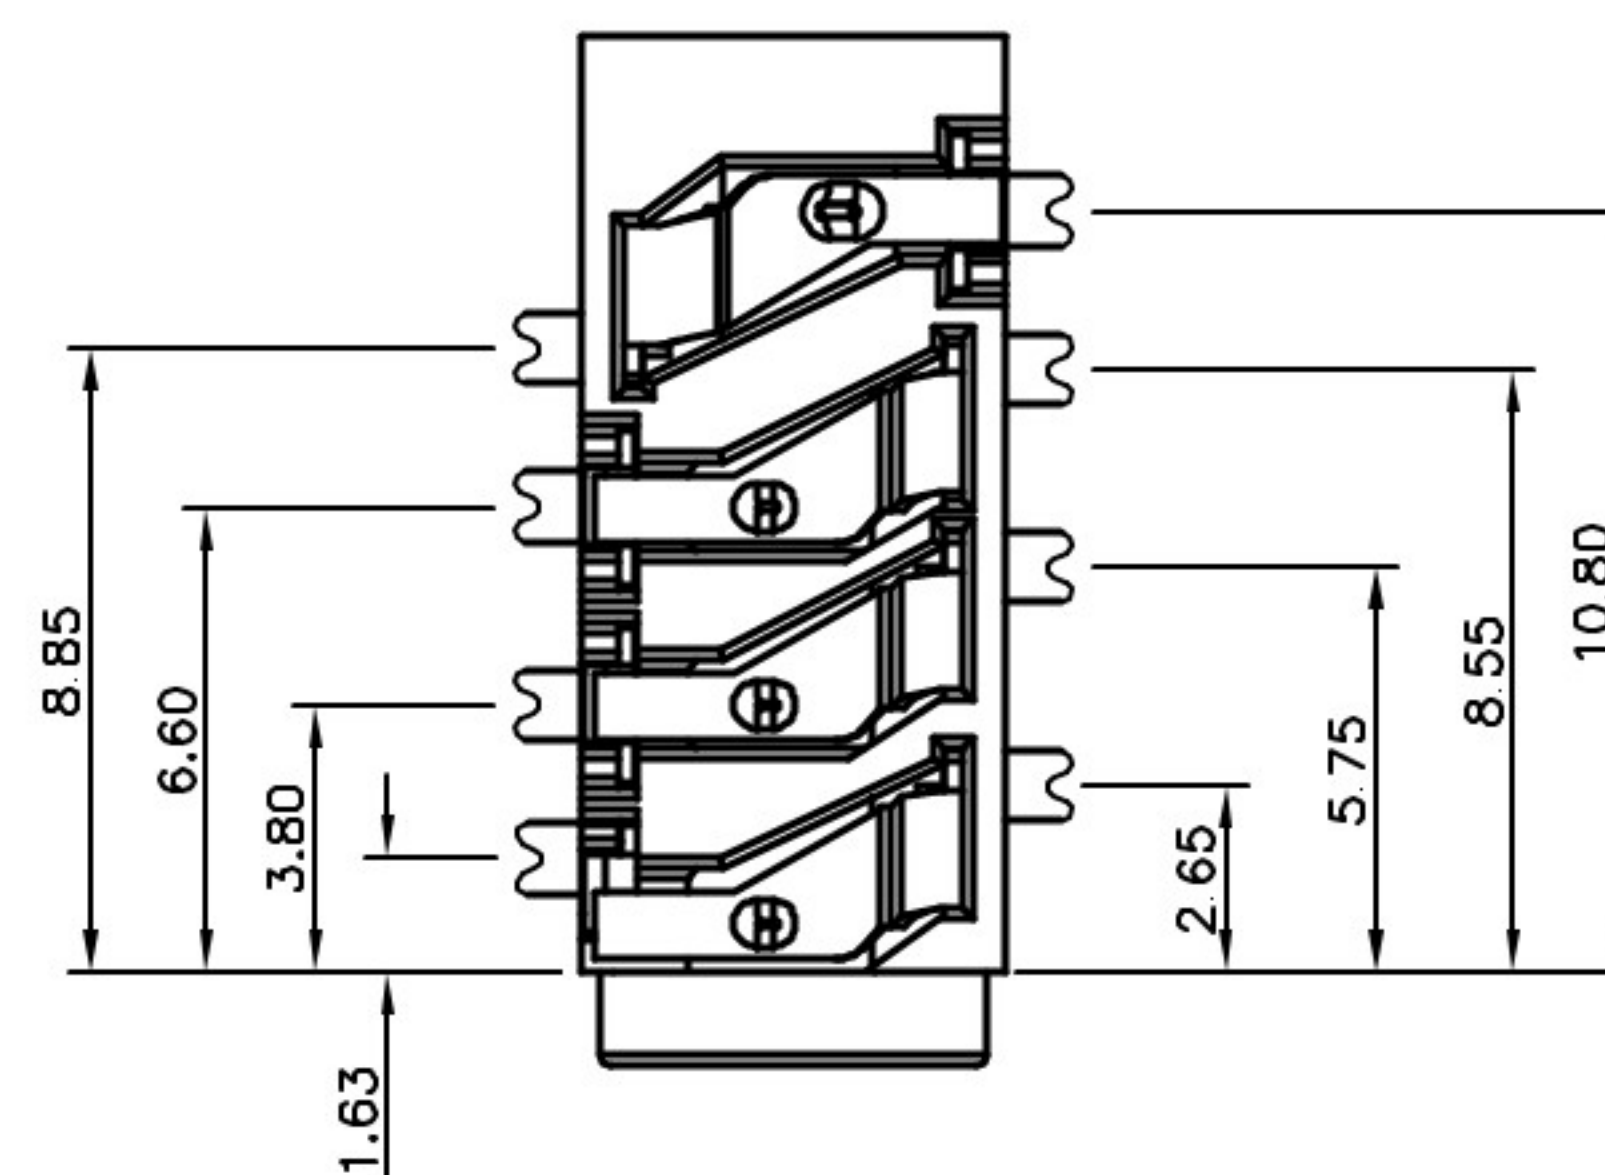


CIRCUIT DIAGRAM

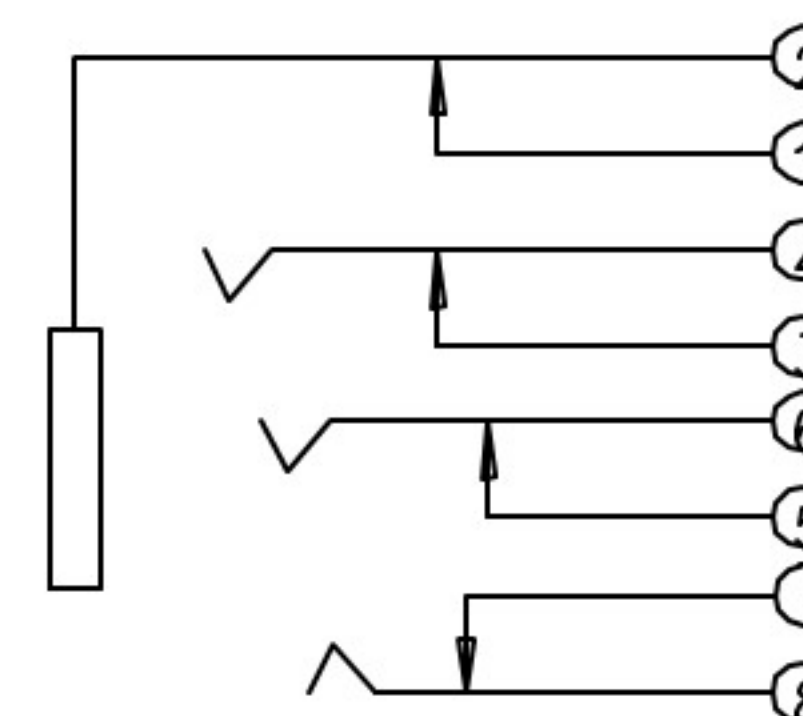

NOTES:

- REFER TO GWS025, REQUEST OF THE SPECIFICATION:
- CONTACT RESISTANCE: 50mΩ MAX.;
- INSULATION RESISTANCE: 100MΩ MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: SEE TABLE B;
- CONNECTOR MATING FORCES: 2.94~29.4N (0.3~3.00Kgf);
- CONNECTOR UNMATING FORCES: 2.94~29.4N (0.3~3.00Kgf);

							主要技术性能		UNLESS OTHERWISE SPECIFIED TOLERANCES				 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
							额定电负荷	DC 30V\0.5A								
4		盖 脚	1	磷 铜	0.25T	镀 银	接触电阻	≤0.03Ω	DECIMALS:		ANGLES:		DWG NO.	Q/XM-CP-RD-XXXX	PART NAME: PHONE JACK	
3		弹片脚	1	镀青铜	0.2T	镀 银	绝缘电阻	≥100MΩ					DESIGN:	Kai 2018.06.14		
2		中 脚	3	磷 铜	0.2T	镀 银	耐 压	AC500V(50Hz)/min	DIM	TOL	DIM	TOL	CHECK:	Lucky 2018.06.14	REV. UNIT: SHEET: A mm 1/1 	
1		基 座	1	PPA		黑 色	插 拔 力	3-20N	X.	±0.35	X.	±2'	APPROVED	Lucky 2018.06.14		
序号	产品编号	产品名称	数量	材料	规格	电镀	使用温度范围	-30~70℃	X.X	±0.30	X.X	±1'				
	0	1	2	3	4	5							7	8	9	
							使用寿命	5000次	X.XX	±0.20	X.XX	—				
									X.XXX	±0.10	X.XXX	—				