

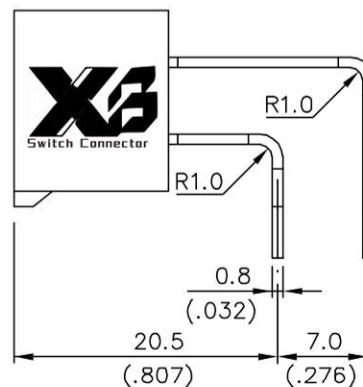
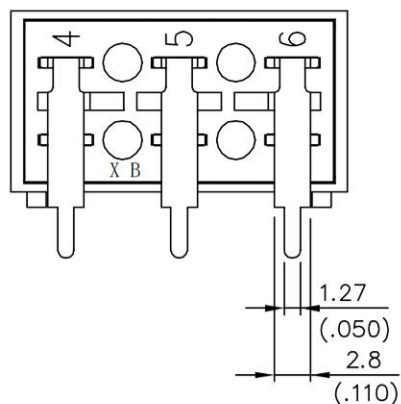


ROHS

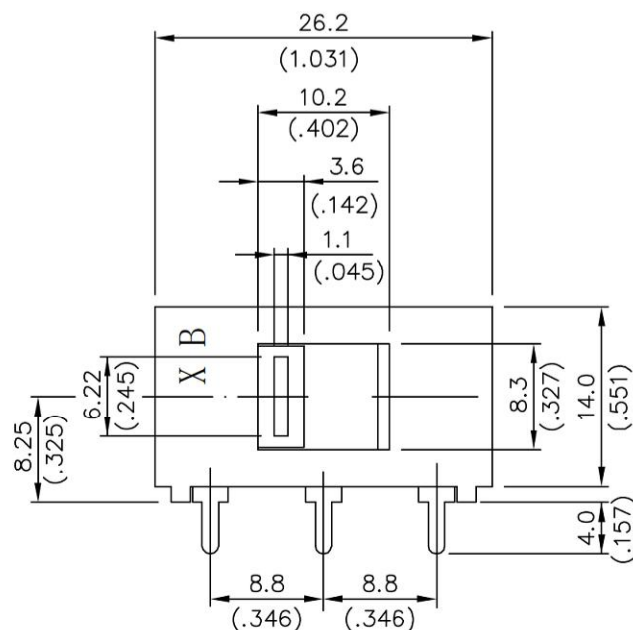

### P.C.B LAYOUT BOTTOM VIEW

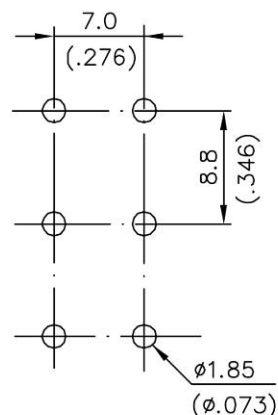

### P.C MOUNTING

### SCHEMATIC (NON-SHORTING)

|                       |                                                |
|-----------------------|------------------------------------------------|
|                       | : ON — ON (DPDT)                               |
| RATING                | : 10A 125V AC , 5A 250V AC<br>5/250 ~ 10/125 ~ |
| CONTACT RESISTANCE    | : DC 2—4V 1A 20m $\Omega$ OR LESS              |
| INSULATION RESISTANCE | : DC 500V 100M $\Omega$ OR MORE                |
| WITHSTAND VOLTAGE     | : 1500V AC 1 Min                               |
| KNOB                  |                                                |


The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.



东莞市溪榜电子有限公司  
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB SLIDE SWITCH

MODEL : XB-PBS-110-W



TOLERANCE  
<=1.5mm $\pm$ 0.1  
> 1.5mm $\pm$ 0.2  
>=10mm $\pm$ 0.3

ANGLE  
 $\pm 2^\circ$

| NO. | PART NAME    | MATERIAL       | QTY. | FINISHING |
|-----|--------------|----------------|------|-----------|
| 7   | SPRING       | STEEL WIRE     | 1    | NATURE    |
| 6   | STEEL BALL   | STEEL          | 1    | NATURE    |
| 5   | BOARD        | PHENOLIC RESIN | 1    | NATURE    |
| 4   | CONTACT CLIP | PBS STRIP      | 2    | Ag PLATED |
| 3   | FRAME        | IRON STRIP     | 1    | Ni PLATED |
| 2   | TERMINAL     | BRASS STRIP    | 8    | Ag PLATED |
| 1   | KNOB         | POM            | 1    | BLACK     |