



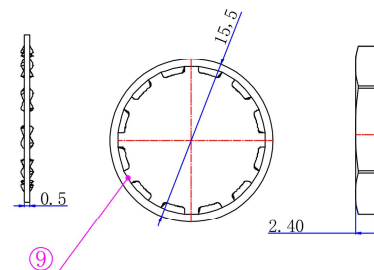
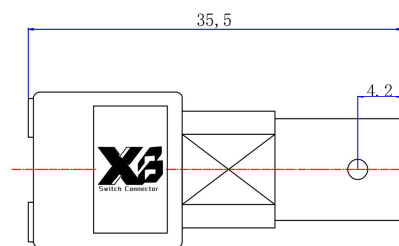
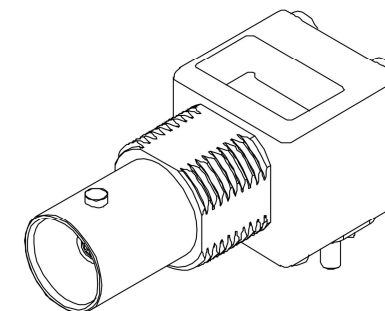



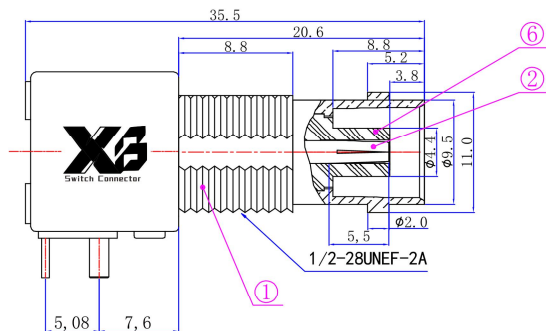

Product NO.

XB-801-0030

| REV | DESCRIPTION         | DWN      | DATE       | APPROVEN  |
|-----|---------------------|----------|------------|-----------|
| A   | First issue         | Mr. CHEN | 2017/12/13 | John kine |
| B   | See "Carmine" plece | XIEFENG  | 2022/07/18 |           |



## Specifications

Impedance:50 Ohms

Frequency Range:DC 0~3G

VSWR:1.3MAX

Working Voltage:500V rms @ sea level

Insulation Resistance:5000 MΩ

Temperature Range:-55℃ T0 +155℃

Relative Temperature:≤95%(40℃±2℃)

Drawings products are in line with ROHS standards

|   |                   |           |              |   |
|---|-------------------|-----------|--------------|---|
| 1 | Body              | ZINC3#    | NI: 80-120"  | 1 |
| 2 | Center contact<1> | CI7200    | AU: 0.8-1.0" | 1 |
| 3 | Center contact<2> | Brass59-1 | AU: 0.8-1.0" | 1 |
| 4 | Ground            | Iron      | SN: 80-100"  | 1 |
| 5 | fixed foot        | Iron      | SN: 80-100"  | 2 |
| 6 | Insulator<1>      | POM       | White        | 1 |
| 7 | Insulator<2>      | POM       | White        | 1 |
| 8 | Nut               | Brass59-1 | NI: 80-120"  | 1 |
| 9 | washer            | Iron      | NI: 80-120"  | 1 |

NOTE:

DRAWN

Zelin. CHEN

CHECKED

APPROVALS

2017/12/


13

13/12.2017

Tolerance

|         |       |
|---------|-------|
| X.      | ±0.15 |
| X.X     | ±0.10 |
| X.XX    | ±0.05 |
| Angular | ±5°   |

View



UNIT

MM

SCALE

1:1

**东莞市溪榜电子有限公司**  
DONG GUAN XI BANG ELECTRONICS CO., LTD

Name: BNC JACK CONNECTOR

SIZE

Product NO.

XB-801-0030

DateTime

2017/12/13

CAD FILE

D/company drawings/BD

SHEET: 1 OF 1

REV

B