





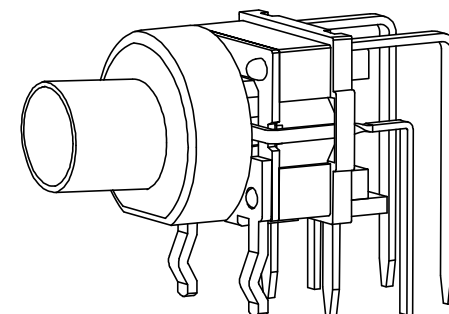

P.C.B Layout

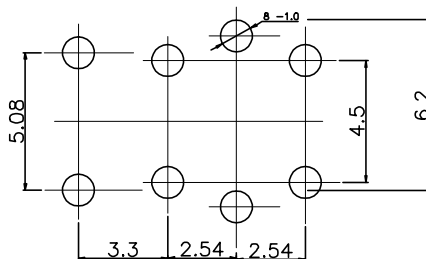



NOTES:

- 1.RATING: 12VDC 50mA
- 2.CONTACT RESISTANCE: 100mΩ Max
- 3.INSULATION RESISTANCE: 100MΩ 250VDC FOR 1MIN
- 4.DIELECTRIC STRENGTH: 250VAC(50/60Hz) FOR1MIN
- 5.LIFE TEST:100,000 CYCLES
- 6.OPERATION FORCE&TRAVEL: SEE SPECIFICATION

6	LED	BRONZE PLATED SILVER
5	COVER	PC/PET
4	PUSH BUTTON	PA66
3	SPRING PLATE	PBS SILVER CLAD
2	CASE	PA66
1	TERMINAL	SILVER PLATED BRONZE
NO.	PART NAME	MATERIAL



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

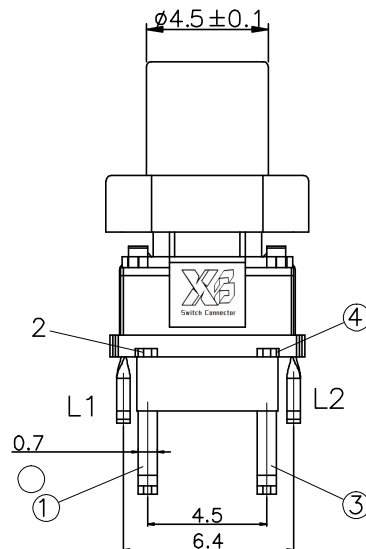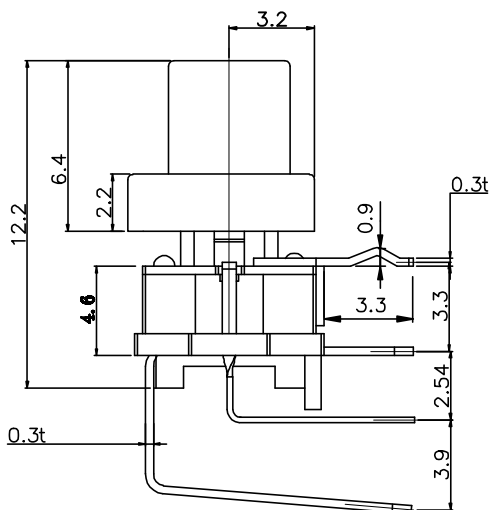

LED COLOR						
1	3	4	5	12	13	14
Red	Green	Blue	White	Red Yellow	Red Green	Red Blue

TOLERANCE				PART NO.:		TITLE	
UNLESS OTHERWISE STATED				带灯开关		TACT SWITCH	
X.X	±0.25	mm	±0.5'	DRAWN	DATE	MODEL	XB-TS-LED-HF02-21LMD-XX
X.XX	±0.1	UNIT	mm	21 21	2012.05.16	MATL	
REV	A	SCALE	4:1	CHK'D	DATE	FINISH	
SIZE	A4	SHEET	1 OF 1	2012.05.16			

