


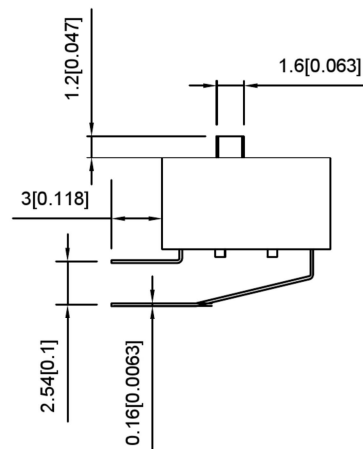
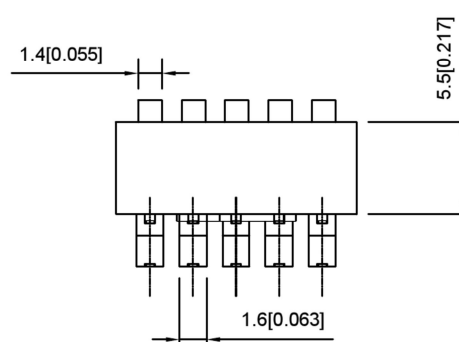
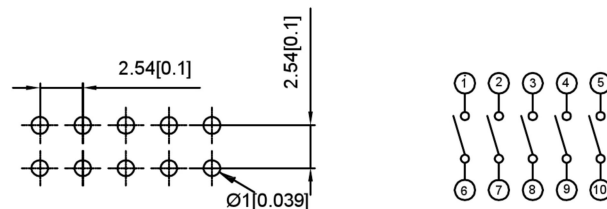


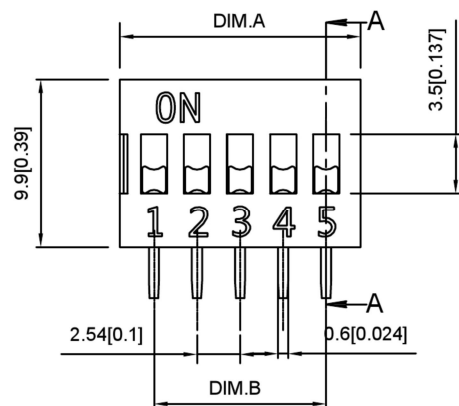

Projection(P)



SECTION A-A



Short(S)

PART NO.	NO.OF POS	DIM.A	DIM.B	Cover/Red(R)		Cover/Blue(BL)	
				Projedion(P)	Short(S)	Projedion(P)	Short(S)
DA-01	1	4.06		DA-01RP	DA-01RS	DA-01BLP	DA-01BLS
DA-02	2	6.6	2.54	DA-02RP	DA-02RS	DA-02BLP	DA-02BLS
DA-03	3	9.14	5.08	DA-03RP	DA-03RS	DA-03BLP	DA-03BLS
DA-04	4	11.68	7.62	DA-04RP	DA-04RS	DA-04BLP	DA-04BLS
DA-05	5	14.22	10.16	DA-05RP	DA-05RS	DA-05BLP	DA-05BLS
DA-06	6	16.76	12.7	DA-06RP	DA-06RS	DA-06BLP	DA-06BLS
DA-07	7	19.3	15.24	DA-07RP	DA-07RS	DA-07BLP	DA-07BLS
DA-08	8	21.84	17.78	DA-08RP	DA-08RS	DA-08BLP	DA-08BLS
DA-09	9	24.38	20.32	DA-09RP	DA-09RS	DA-09BLP	DA-09BLS
DA-10	10	26.92	22.86	DA-10RP	DA-10RS	DA-10BLP	DA-10BLS
DA-12	12	32	27.94	DA-12RP	DA-12RS	DA-12BLP	DA-12BLS

SPECIFICATION

Contact Rating:	25mA,24V DC
Contact Resistance:	50MΩ max
Insulation Resistance:	100MΩ min.500V DC
Dielectric Strength:	500V AC/1minute
Operating Force:	1000gf max
Travel:	2mm
Operating Life:	3000cycles
Operating Temp:	-20 °C~+70 °C
Storage Temp:	-30 °C~+80 °C

4	Terminal		Copper Alloy	T: Tin plated G: Plating Gold≥15MIU
3	Base	1	Pa66	Black
2	Keystake	1	Pa66	White
1	Cover	1	Pa66	Black Blue Red
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	



DSND		SCALE: N/A	MODEL TYPE: DIP SWITCH
DWN		VIEW:	PART NO.: DA-XX-X-X
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

DONG GUAN XI BANG ELECTRONIC CO., LTD

WEIGHT	SHEET	REVISI
	1/1	A0