

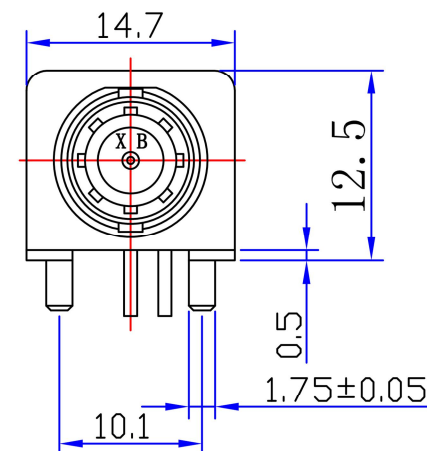


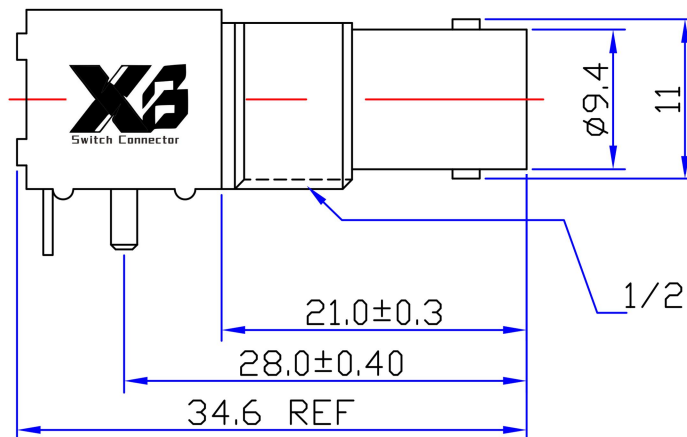

Product NO. XB-801-0044

REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	JIM	2012/11/02	John kine

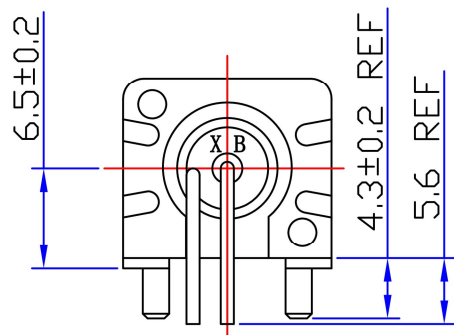

Specifications

Impedance:50 Ohms

Frequency Range:DC~3G

VSWR:1.3MAX



Working Voltage:500V rms @ sea level

Insulation Resistance:5000 Ohms min

Temperature Range:-55°C TO +155°C

Relative Temperature:≤95%(40° C±2° C)

Drawings products are in line with ROHS standards

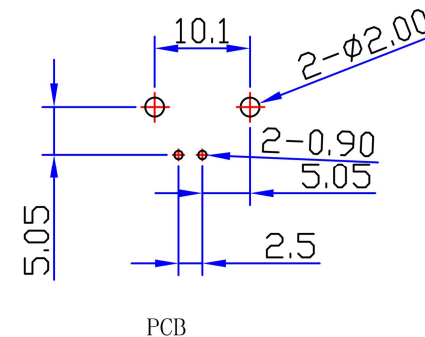

1	Body	Zinc	NI:80-120u"
2	Center contact	Brass	AU:1u"
3	Lead	Iron	AU:1u"
4	Fixed footrest	Iron	NI:80-120u"
5	Insulator	POM	White
6	Fixed mount	PBT	BLACK
7	Washer	Brass	NI:80-120u"
8	Hex nut	Brass	NI:80-120u"
9			
10			
NO	Component Number	Material	Finish

NOTE:

DRAWN
Zelin. Zhang2012/11/
10

CHECKED


APPROVALS
John

12/04.2012

Tolerance

0-6 ±0.20
6-30 ±0.30
30-120 ±0.5
Angular ±2°

View



UNIT

MM

SCALE

1:1

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

Name: BNC BLACK JACK CONNECTOR (12.5MM)

SIZE A Product NO. XB-801-0044

DateTime
2012/11/02CAD FILE
D/company drawings/BD

SHEET: 1 OF 1