

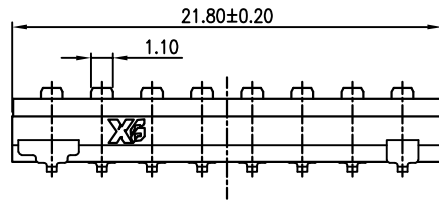



PRODUCT NO.	RoHS compliant
XB-DSDT08LSGET	


REV.	ECN NO.	DR	DATE
A	New	H H	15/01/22

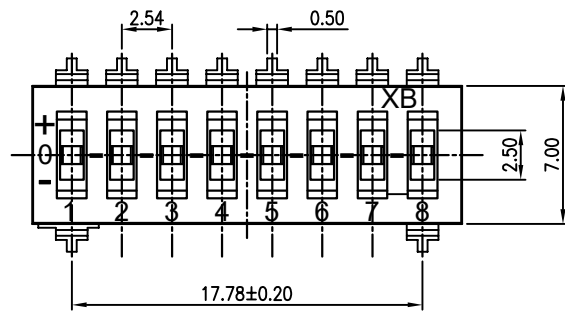


PART NO.	NO.OFPOS	DIM.A	DIM.B
XB-DSDT-4P	4	10.16	7.62
XB-DSDT-5P	5	12.7	10.16
XB-DSDT-6P	6	15.24	12.7
XB-DSDT-7P	7	17.78	15.24
XB-DSDT-8P	8	20.32	17.78

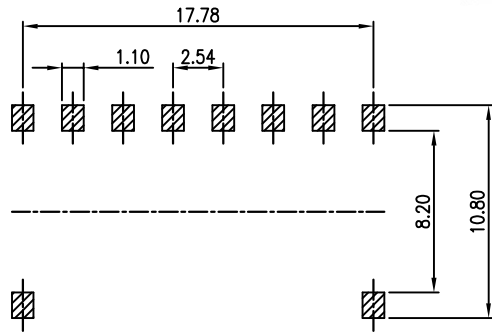

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)



[SCHEMATIC]



NOTES :

1.Specification:

- 1>.Operating force:1000g/f Max
- 2>.Mechanical Life:3000cycles minimum
- 3>.Electrical Life:2000cycles minimum

Contact Rating:

- 1>.Switching: 25mA,24VDC
- 2>.Non Switching 100mA,50VDC

Contact Resistance:

- 1>.Initial:50m0hm Max.
- 2>.Afer Life Test:100m0hm Max.

2. PLATING:

GOLD FLASH 1u"(min.) SOLDER TAIL,
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDERPLATING OVERALL.

3. PART NUMBER DESCRIPTION

XB-DSDT-M XX L H G E T

[包装方式: T=管装 R=Reel]

[电镀层: E=接触部3u" G=接触部3u" / 焊接部1~2u"]

[G= 镀全金 S= 内金外锡]

[脚型: S脚 / J脚 / H脚 / A脚 / Z脚]

[T= 低推贴胶 S= 低推不贴胶 L=长推]

[产品P数: 08=8P]

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3u"Gold

TOLERANCE UNLESS OTHERWISE SPECIFIED	
LINER	ANGLES
.0 ± 0.25	0. ± 2°
.00 ± 0.15	.0 ± 1°
.000± 0.10	.00± 0.5°
DESIGN	CHI HUAI HE
DRAWING	
CHECK	
APPRO.	

INSPECTION
COPY
PROJECTION
2015/01/22

XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONIC CO., LTD.				
TITLE XB DSDT SERIES PITCH 2.54mm				
PRODUCT FAMILY DSDT SERIES				
PRAT NO. XB-DSDT08LSGET				
FILE NO. XB-DSDT08LSGET-A				
SIZE	UNIT	SCALE	SHEET	REV.
A4	mm	1 : 1	1 OF 1	A