
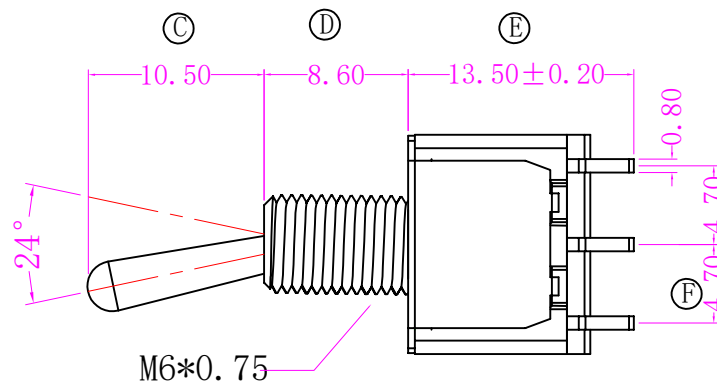
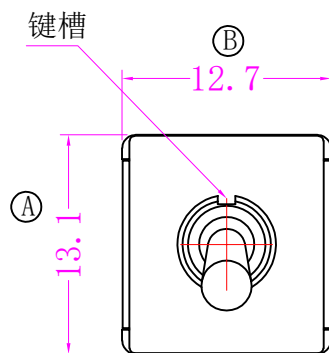


安装孔尺寸

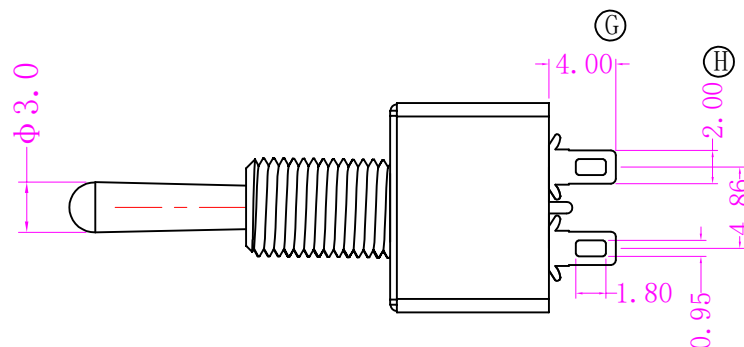

标注: ①-⑧ 为重点检测尺寸

Technical characteristics

SPECIFICATION: 5 A max. @ 125 VAC.

2 A max. @ 250 VAC.

MECHANICAL LIFE: 40,000 make-and-break cycles.

CONTACT RESISTANCE: 20mΩ max. initial @2-4VDC
100mA for both silver.

INSULATION RESISTANCE: 1000 MΩ min.

DIELECTRIC STRENGTH: 1500 VAC min.

OPERATING TEMPERATURE: -30°C to +85°C.

Materials

CASE: PPA (UL 94V-0)

HOUSING: Stainless Steel.

ACTUATOR: Alloy, chrome plated.

BUSHING: Alloy, nickel plated.

CONTACT/TERMINALS: Copper alloy silver plated.

RoHS

手柄位置及导通端子示意图

	POS. 1	POS. 2	POS. 3
Model NO.			
202	ON	NONE	ON
SCHEMATIC		NONE	

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

				公差 TOLERANCES	.X ± 0.4 .XX ± 0.25	角度	± 5°	UNIT 单位 mm	SCALE 1:1	
				版本 VERSION	A0	比例尺 SCALE	NONE	日期 DATE	2021.10.29	TITLE 图名 TOGGLE SWITCH
				核准		核对		绘图	WSL	DWG NO. 料号 SM00210ZNR
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY		PART NO. 型号 XB-MT-0-202-A101-M200-RS