
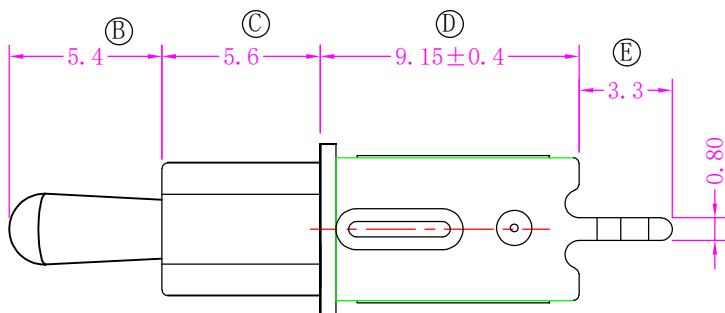
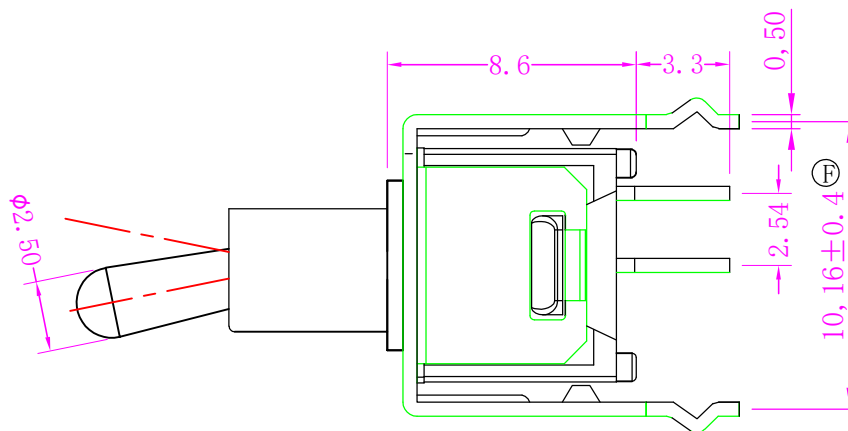


安装孔尺寸

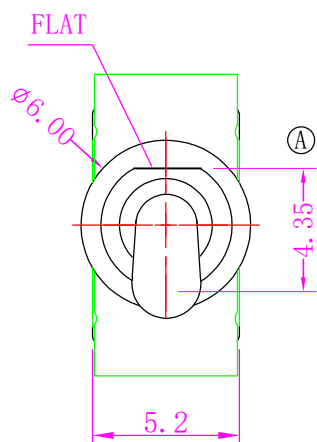

标注: ①-⑦ 尺寸的重点检验尺寸

Technical characteristics

SPECIFICATION: 3 A max. @ 125 VAC.

1.5 A max. @ 250 VAC.

MECHANICAL LIFE: 40,000 make-and-break cycles.

CONTACT RESISTANCE: 20mΩ max. initial @ 2-4VDC
100mA for both silver.

INSULATION RESISTANCE: 1000 MΩ min.

DIELECTRIC STRENGTH: 1000 VAC min.

OPERATING TEMPERATURE: -30°C to +85°C.

Materials

CASE: PPA (UL 94V-0)

HOUSING: Stainless Steel.

ACTUATOR: Alloy, chrome plated.

BUSHING: Alloy, nickel plated.

CONTACT/TERMINALS: Copper alloy silver plated.

RoHS

手柄位置及导通端子示意图

	POS. 1	POS. 2	POS. 3
Model NO.			
101	ON	NONE	OFF
SCHEMATIC		NONE	



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

				公差 TOLERANCES	.X± 0.4	.XX± 0.25	角度	± 5°	UNIT 单位 mm	SCALE 1:1	
				版本 VERSION	A0	比例尺 SCALE	NONE	日期 DATE	2022. 5. 5	TITLE 图名	Sub-Miniature Toggle Switch
				核准		核对		绘图		DWG NO. 料号	
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		WSL		PART NO. 型号	XB-ST-0-101-C02-N005-RS