


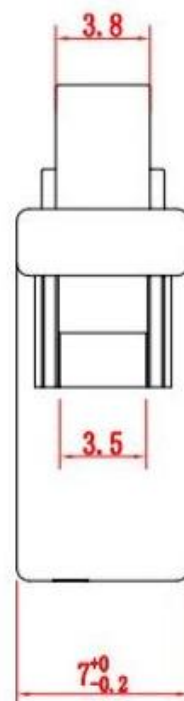


REVISION	A	RoHS
----------	---	------

SYMB	REVISION	DATE	APVD.

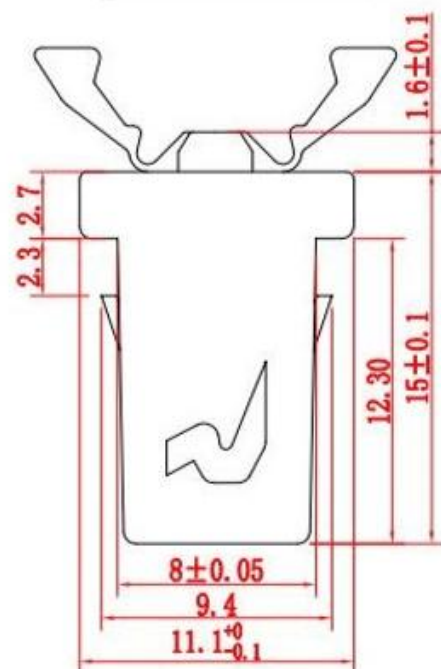


安装孔参考规格

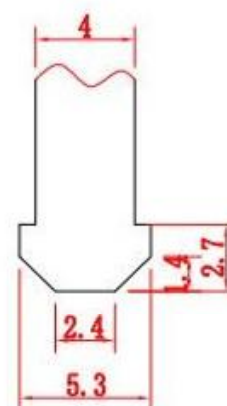

锁舌参考规格

主要技术规格:

寿命次数: 50000次
 按力: 400-600gf
 接触电阻: $\sim 30m\Omega$
 温度范围: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 额定负荷: DC 12V 0.1A
 耐压: AC 250V (50Hz) /min
 绝缘电阻: $\geq 100M\Omega$
 承受最大拉力: 1000gf

TITLE		DOOR LATCH SWITCH		DRAWN				TOLERANCE OTHERWISE UNLESS SPECIFIED		8				
PART NO.				CHECKED				UP TO 5	±0.2	7				
DRAW NO.		DL1		APPROVED				ABOVE 5 ~ 30	±0.3	6				
								ABOVE 30 ~ 50	±0.4	5				
SCALE: 2:1		UNIT: mm		DATE:				ABOVE 50	±0.5	4				
								ANGLE	±3°	3	SPRING	SUS	1	NI PLATED
 东莞市溪榜电子有限公司										2	HOUSING	POM	1	BLACK
										1	SLIDER	PA12	1	BLACK
										NO.	PARTS	MATERIAL	QTY.	FINISHING