


ROHS

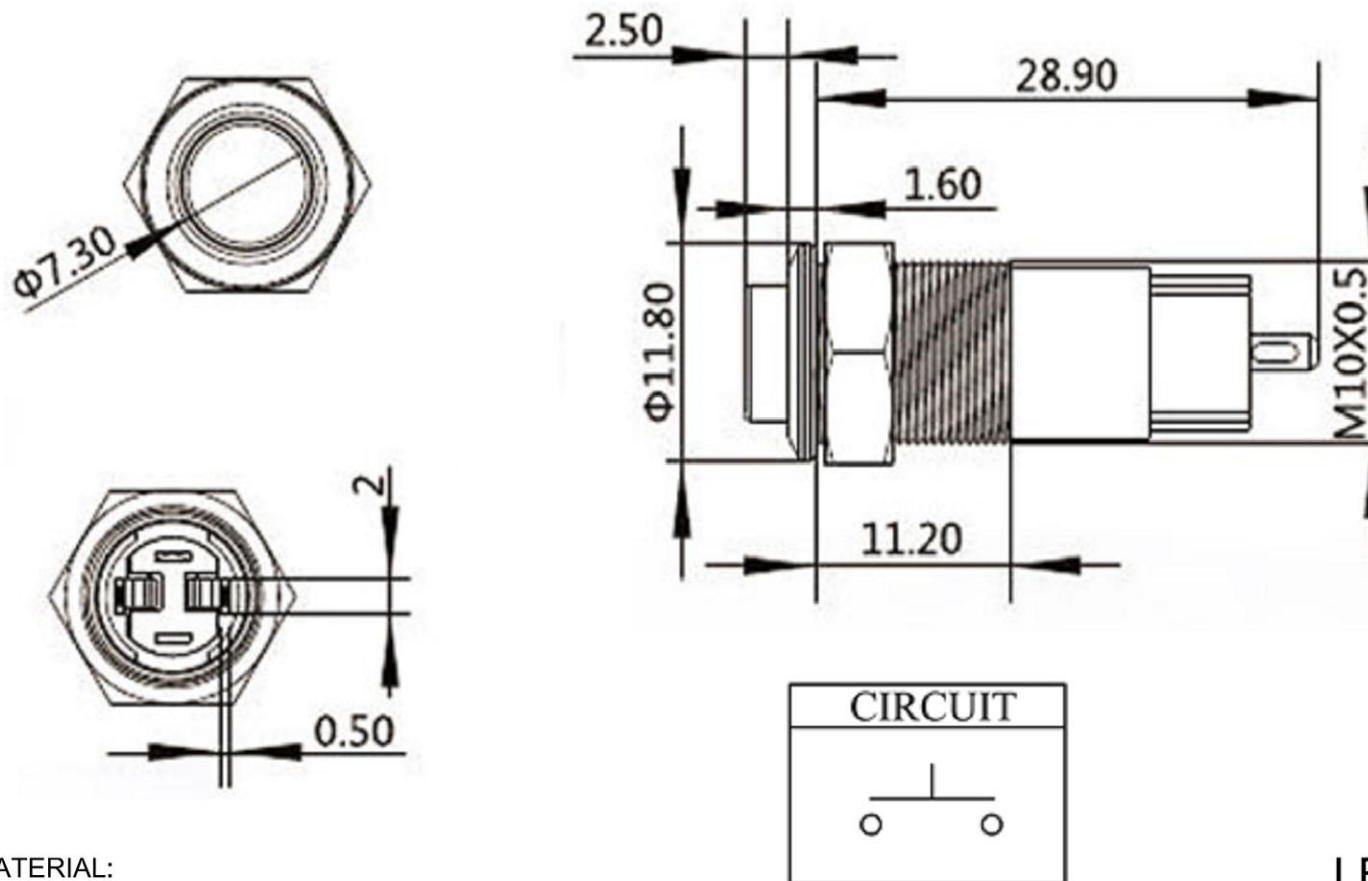

Rating: 1A 36VDC
 1A 125VAC / 0.5A 250VDC
 Contact Resistance: 50mΩ Max.
 Insulation Resistance: DC 500V 100MΩ Min.
 Dielectric Strength: AC 1000V 1 minute
 Total travel: 2.0±0.5mm
 Operating Force: 400±100gf
 Electrical Life: 10,000 cycles
 Mechanical Life: 5,000 cycles
 Operating Temperature: -20° C ~ 70° C
 Function: OFF - ON

MATERIAL:
 Actuator: SUS ;
 Top Base: SUS;
 Bottom Base: PA66+GF ;
 Terminal: Brass, Silver plated ;
 Nut: Brass, Ni plated .

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing is subjected to change for improvement without prior notice.

LED Specifications

W6	白色	5.0	6.0	9.0	15
U6	蓝色	5.0	6.0	9.0	15
G6	纯绿色	5.0	6.0	9.0	15
Y6	黄色	5.0	6.0	9.0	15
R6	红色	5.0	6.0	9.0	15
W3	白色	2.8	3.0	3.4	15

LED 类型	双向LED灯珠（交直流通用）			U3	蓝色	2.8	3.0	3.4	15
寿 命	40000小时（参考值）			G3	纯绿色	2.8	3.0	3.4	15
额定电压	AC/DC12V	AC/DC24V	AC/DC110V	Y2	黄色	1.8	2.0	2.4	15
	AC/DC36V	AC/DC48V	AC/DC220V	R2	红色	1.8	2.0	2.4	15
额定电流	约15mA		约3mA	灯发光颜色 X Emitted color X	最小	一般	最大	额定 电流 (mA)	
降压方式	采用3V灯，需内置电阻				顺向电压(V)				

Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD												
TITLE : METAL PUHS BUTTON SWITCH												
MODEL : XB-PBM10-Z-H-RU3-S0												
UNIT : MM		DWN.	ZENQ. CHEN	DATE	TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3	ANGLE ±2°						
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE								
VERSION	01	APPD.	FEI. LONG. HE	DATE								
							7	SPRING	STEEL WIRE	1	NATURE	
							6	STEEL BALL	STEEL	1	NATURE	
							5	BOARD	PHENOLIC RESIN	1	NATURE	
							4	CONTACT CLIP	PBS STRIP	2	Ag PLATED	
							3	FRAME	IRON STRIP	1	Ni PLATED	
							2	TERMINAL	BRASS STRIP	8	Ag PLATED	
							1	KNOB	POM	1	BLACK	
							NO.	PART NAME	MATERIAL	QTY.	FINISHING	