

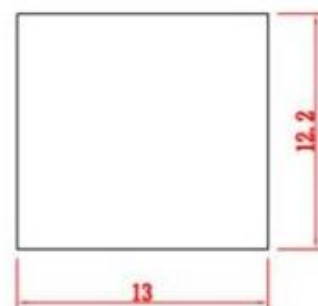
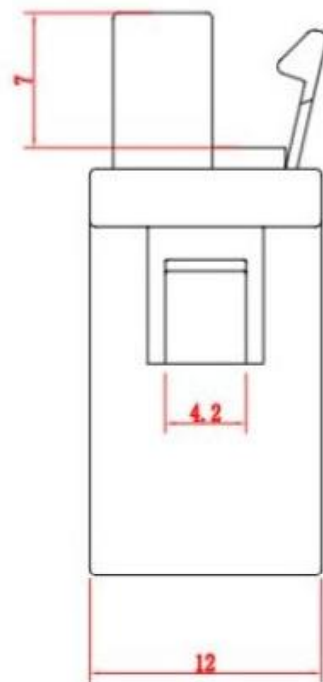


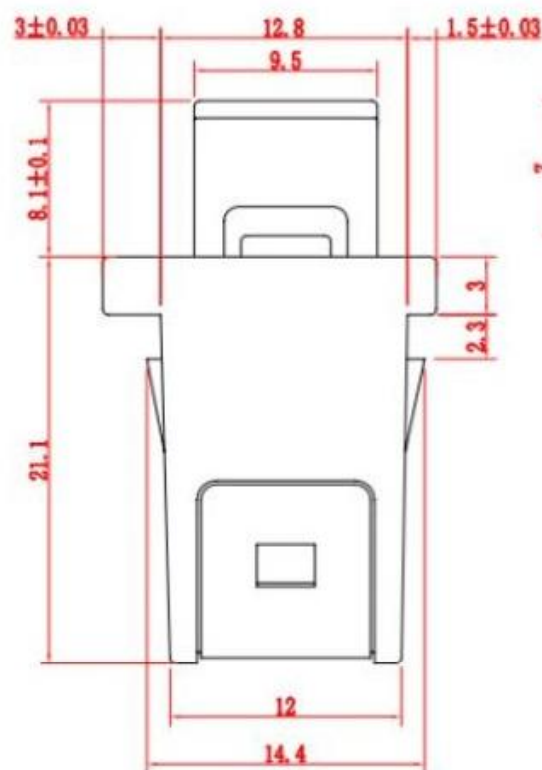

安装孔参考规格

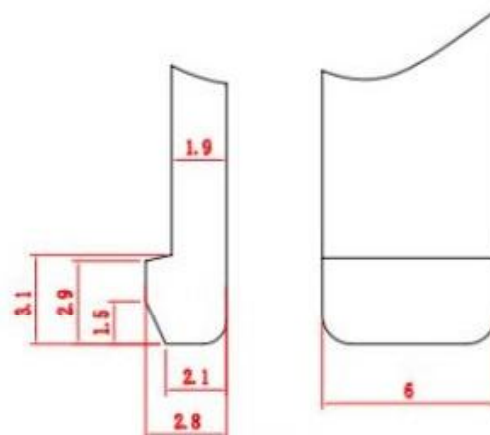

锁舌参考规格

主要技术规格:

寿命次数: 5000次
 按力: 3-5N
 接触电阻: $\approx 30m\Omega$
 温度范围: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 额定负荷: DC 12V 0.1A
 耐压: AC 250V (50Hz) /min
 绝缘电阻: $\geq 100M\Omega$
 承受最大拉力: 50N

TITLE	DOOR LATCH SWITCH	DRAWN		TOLERANCE OTHERWISE UNLESS SPECIFIED	8				
PART NO.		CHECKED		UP TO 5	± 0.2	7			
DRAW NO.	DL1	APPROVED		ABOVE 5 ~ 30	± 0.3	6			
SCALE: 2:1	UNIT: mm	DATE:		ABOVE 30 ~ 50	± 0.4	5			
				ABOVE 50	± 0.5	4			
				ANGLE	$\pm 3'$	3	SPRING	SUS	1 NI PLATED
						2	HOUSING	POM	1 BLACK
						1	SLIDER	PA12	1 BLACK
						NO.	PARTS	MATERIAL	QTY. FINISHING