




ROHS

SCHEMATIC

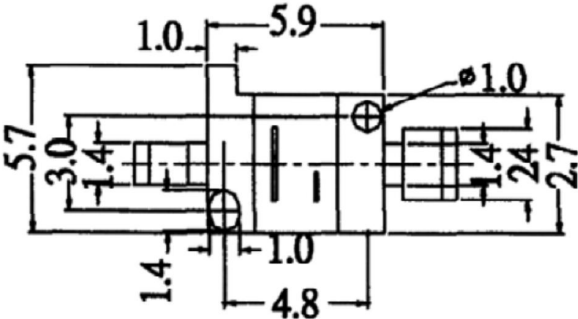


- Product material
- 1. Blade switch
 - 2. Base: POM/PA66
 - 3. Terminal: Phosphorus copper
 - 4. Contact point: Purple copper
 - 5. Electroplating: Silver/Gold Plating
 - 6. Temperature range for use: $-10\text{ }^{\circ}\text{C} \pm 60\text{ }^{\circ}\text{C}$
 - 7. Current and voltage: 0.5A 12V DC
 - 8. Operating force: $30\text{GF} \pm 10\text{GF}$
 - 9. Voltage withstand: 500V 0.5mA/min
 - 10. Insulation resistance: $100\text{M } \Omega$
 - 11. Contact resistance: $30\text{M } \Omega$
 - 12. Lifetime: 50000 times

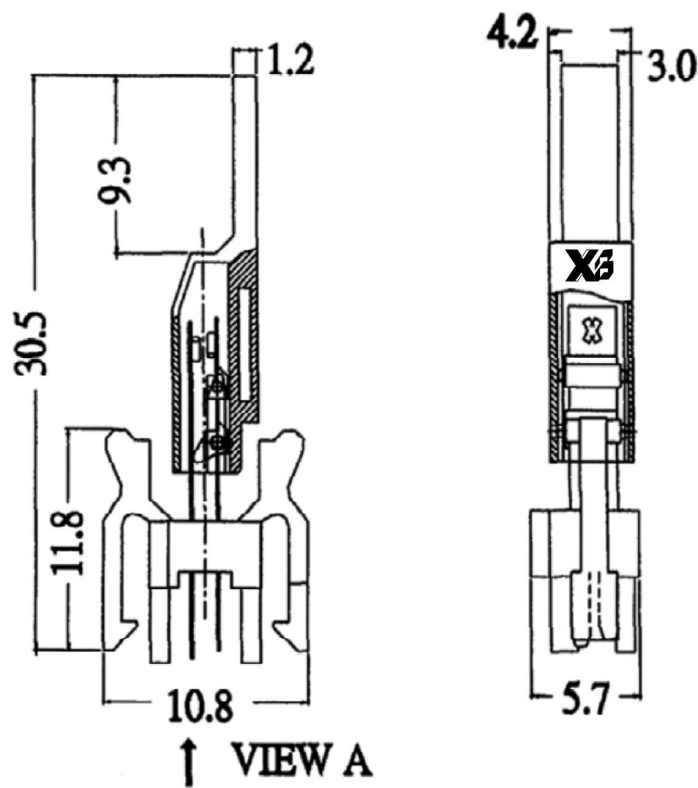

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : LEAF SWITCH

MODBL : XB-LF-1731-A



TOLERANCE
 $\leq 5\text{mm } \pm 0.1$
 $> 5\text{mm } \pm 0.2$

ANGLE TOL
 ± 2

UNIT : MM	DWN.	DATE
SCALE : 3 : 1	CHK'D	DATE
VERSION 01	APPD.	DATE

5	CONTACT	COPPER	1	Ag PLATED
4	SPRING	BRASS STRIP	2	Ag PLATED
3	SPRING	PBS	2	NATURE
2	COVER	POM	1	BLACK
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING