


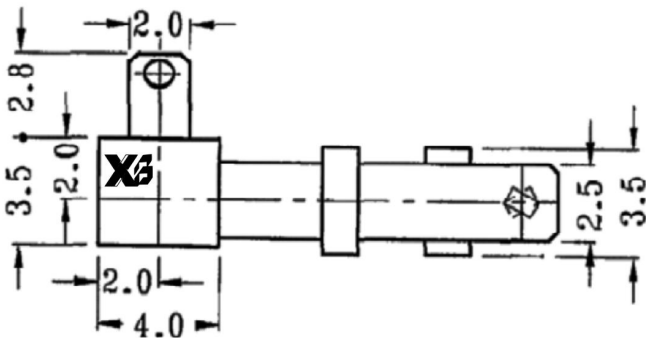



ROHS

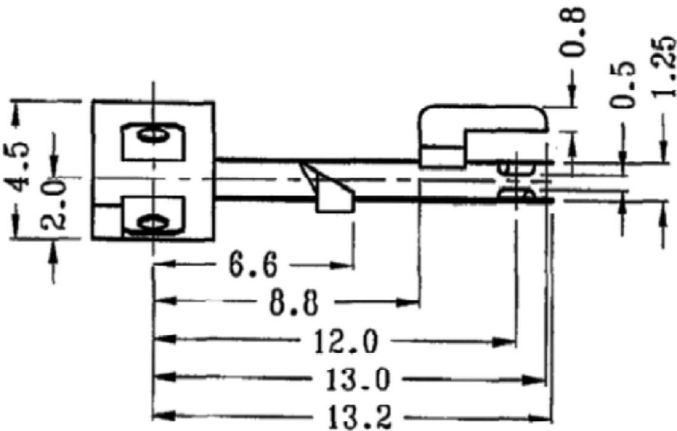

SCHEMATIC



CONTACT PLATING

G = GOLD

N = NICKEL

S = SILVER

X = NIL

Product material


- 1. Blade switch
- 2. Base: POM/PA66
- 3. Terminal: Phosphorus copper
- 4. Contact point: Purple copper
- 5. Electroplating: Silver/Gold Plating
- 6. Temperature range for use: $-10\text{ }^{\circ}\text{C} \pm 60\text{ }^{\circ}\text{C}$
- 7. Current and voltage: 0.5A 12V DC
- 8. Operating force: $30\text{GF} \pm 10\text{GF}$
- 9. Voltage withstand: 500V 0.5mA/min
- 10. Insulation resistance: $100\text{M } \Omega$
- 11. Contact resistance: $30\text{M } \Omega$
- 12. Lifetime: 50000 times



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : LEAF SWITCH

MODBL : XB-LF-040



TOLERANCE
 $\leq 5\text{mm} \pm 0.1$
 $> 5\text{mm} \pm 0.2$

ANGLE TOL
 ± 2

5	CONTACT	COPPER	1	Ag PLATED
4	SPRING	BRASS STRIP	2	Ag PLATED
3	SPRING	PBS	2	NATURE
2	COVER	POM	1	BLACK
1	KNOB	POM	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

UNIT : MM	DWN.	DATE	
SCALE : 3 : 1	CHK'D	DATE	
VERSION	01	APPD.	DATE