

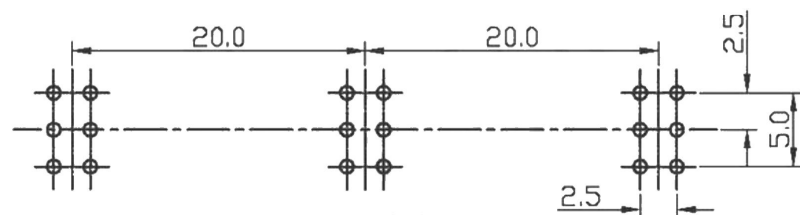
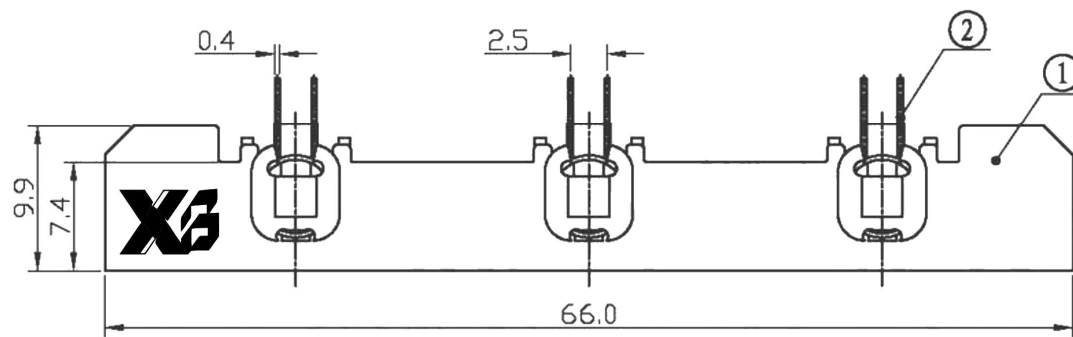
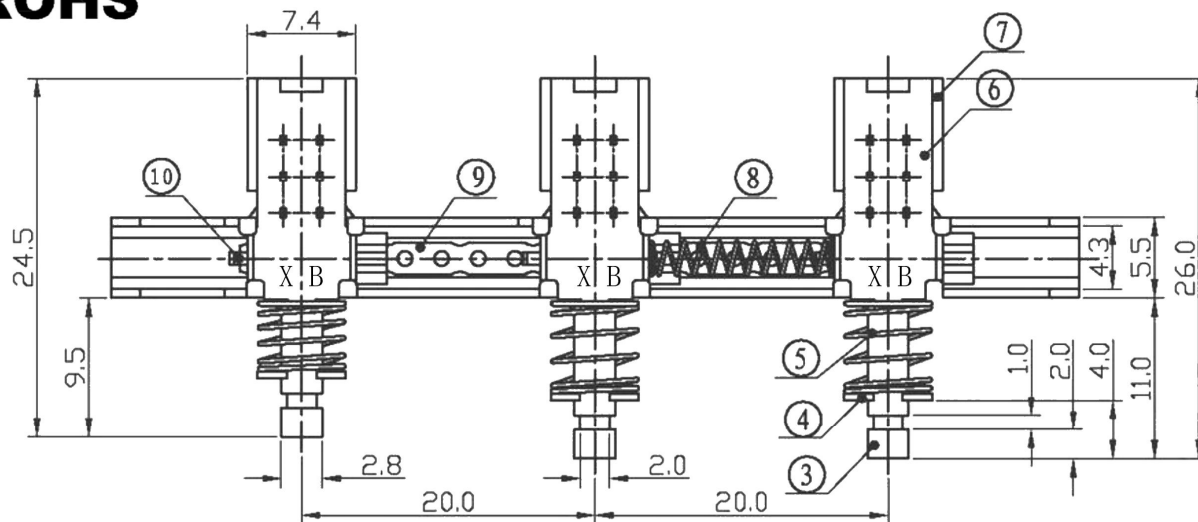


ROHS

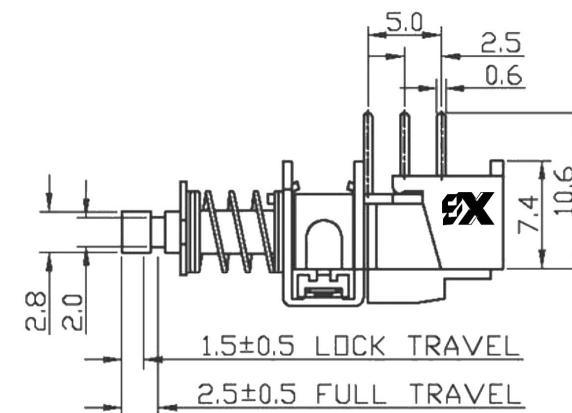

P, C, B LAYOUT

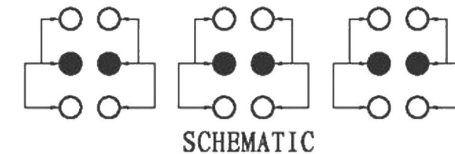

ITEM: PERFORMANCE

Title: PUSH BUTTOMN SWICH

Model: XB-PBS-3D-IF

Rating: 0.3A 0.5A 12V 30V DC

Function: 2P2T

Timing:Non-shorting

ContactResistance (mohms) : 50mΩ max

Insulation Resistanc(Mohms):100M Ω min at 500V DC

Dielectric Strength (V) : AC 500V for 1 min


LifeTest:10,000 Cycles



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : PUSH BUTTON SWITCH

MODEL : PBS-3D-IF5



TOLERANCE
 $\leq 1.5\text{mm} \pm 0.1$
 $> 1.5\text{mm} \pm 0.2$
 $> 10.0\text{mm} \pm 0.3$

ANGLE TOL
 $\pm 2^\circ$

11	CONTACT CLIP	PBS STRIP	2	Ag CLAN
10	INTER-LOCK	POM	3	WHITE/BLACK
9	SUPPORT	SUS	1	NATURE
8	SPRING B	STEEL WIRE	1	NATURE
7	HOUSING	NYLON	1	LIGHT GREY
6	BOARD	PHENOLIC RESIN	1	NATURE
5	SPRING A	SUS	1	NATURE
4	BLOCK	IRON STRIP	1	Ni PLATED
3	KNOB	POM	1	WHITE
2	TERMINAL	BRASS STRIP	18	Ag PLATED
1	FRAME	IRON STRIP	1	Ni PLATED
NO.	PART NAME	MATERIAL	QTY	FINISHING